


LOCATION PLAN

TEST HOLE (TH)		TEST HOLE (TH)	
NO.	DEPTH (NOTE 2)	NO.	DEPTH (NOTE 2)
1	0	15	90
2	0	16	125
3	9	17	20
4	51	18	35
5	100	19	54
6	4	20	54
7	20	21	76
8	25	22	109
9	45	23	50
10	55	24	30
11	15	25	55
12	30	26	54
13	60	27	60
14	60	28	90

B.M. SOUTH WEST CORNER OF NORWOOD BRIDGE SOUTH ABUTMENT ROOF.

- NOTES:
- THE EXISTING PAVING STONE SIDEWALK IS LOCATED OVER A 100± THICK CONCRETE SLAB. LIFT THE SIDEWALK SLAB AS REQUIRED TO MATCH THE ELEVATION OF THE ADJACENT PAVEMENT SLABS.
 - DEPTH IS THE DEPTH OF THE VOID MEASURED IN APRIL 2004.
 - THE APPROACH SLAB IS 300mm THICK AND IS REINFORCED TOP AND BTM. AT 300 O/C. AVOID CUTTING REINFORCING STEEL WHEN INSTALLING INJECTION HOLES. OTHER PAVEMENT SLABS ARE UNREINFORCED

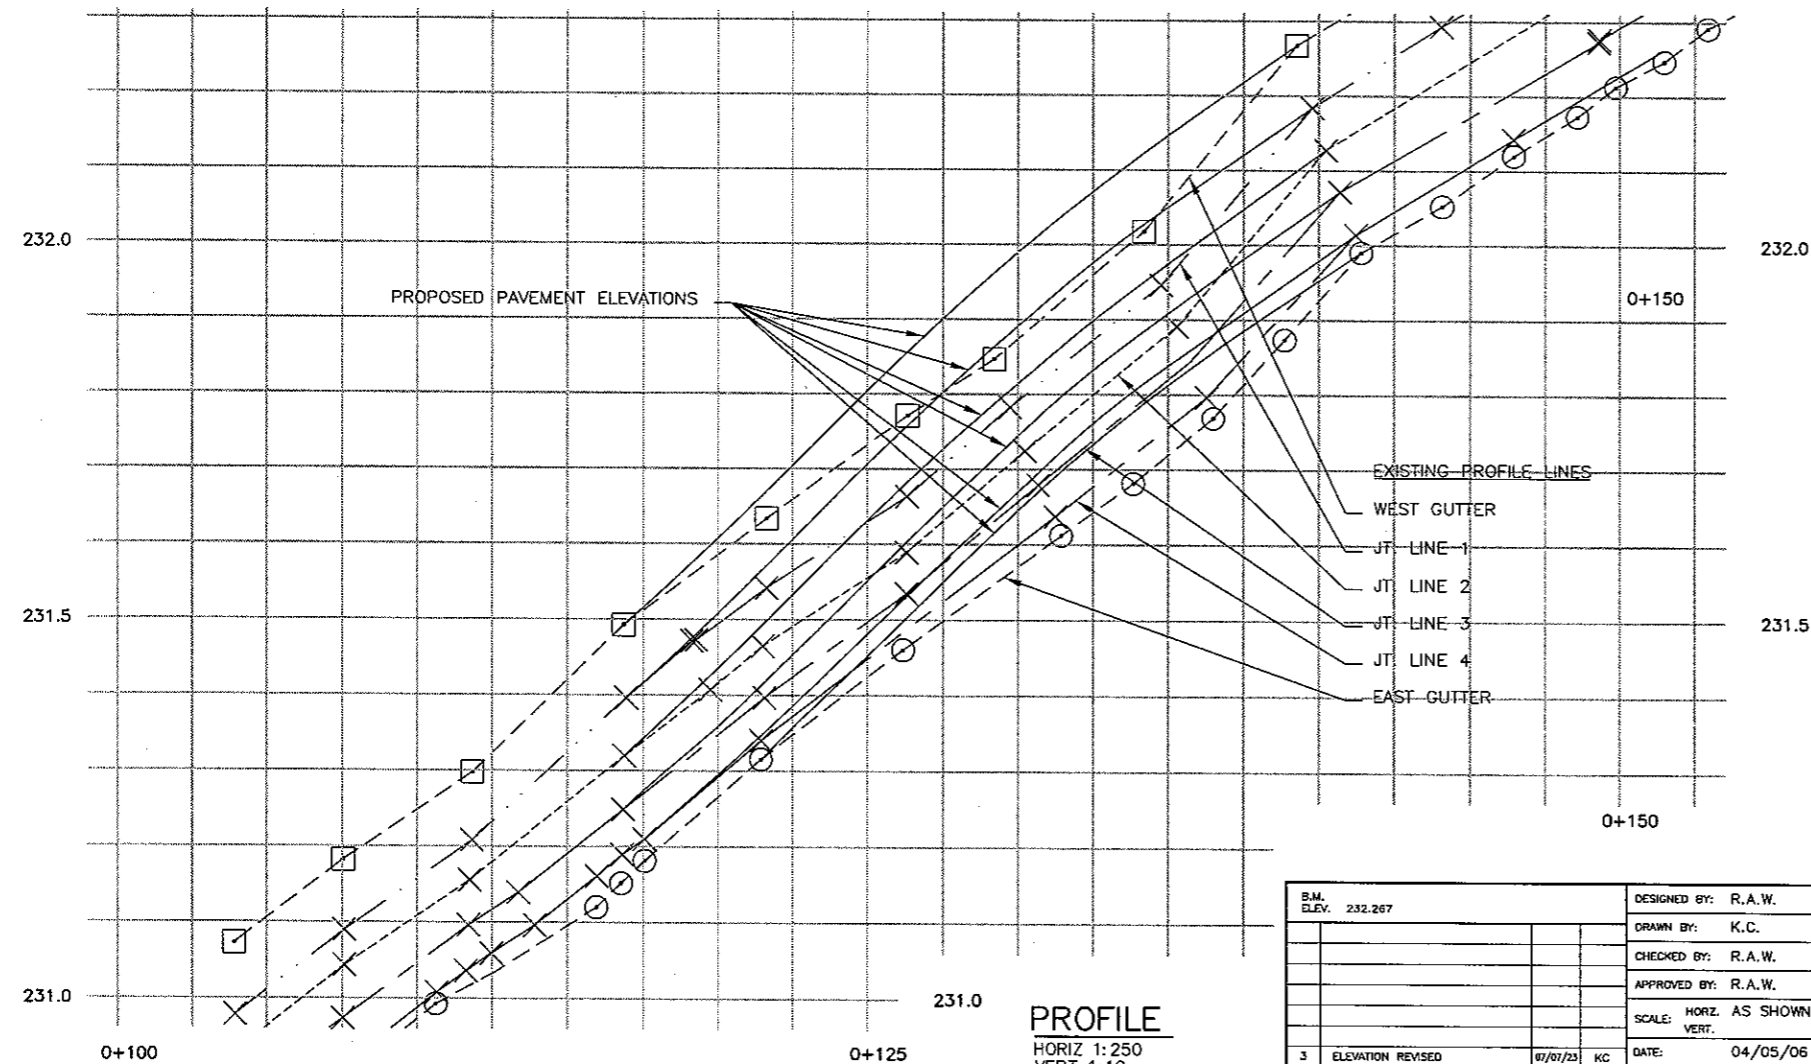

LEGION	
000.000	PROPOSED PAVEMENT ELEVATIONS
000.000	EXISTING ELEVATION

B.M. Elev. 232.267	DESIGNED BY: R.A.W.			
	DRAWN BY: K.C.			
	CHECKED BY: R.A.W.			
	APPROVED BY: R.A.W.			
	SCALE: HORIZ. AS SHOWN VERT.	DATE: 04/05/06		
	AUTHORIZED BY:	DATE:		
	CITY BRIDGE ENGINEER			
3 ELEVATION REVISED 07/01/23 KC				
2 ISSUED FOR TENDER 04/04/23 KC				
1 ISSUED FOR REVIEW 04/04/16 KC				
NO. REVISIONS	DATE	BY		
			CONSULTANT PROJECT NO. 04-2937-2000	PLAN AND PROFILE

CITY DRAWING NUMBER B103-04-01
SHEET 1 OF 2