


22 - CONDUCTOR CABLE
CROSS SECTIONAL VIEW

NOTE FOR 22 CONDUCTOR CABLE:

1. 1 AND 2 ARE 10 GAUGE AWG COPPER STRANDED INSULATED WIRES .
2. 3-22 ARE 14 GAUGE AWG COPPER SOLID INSULATED WIRE .

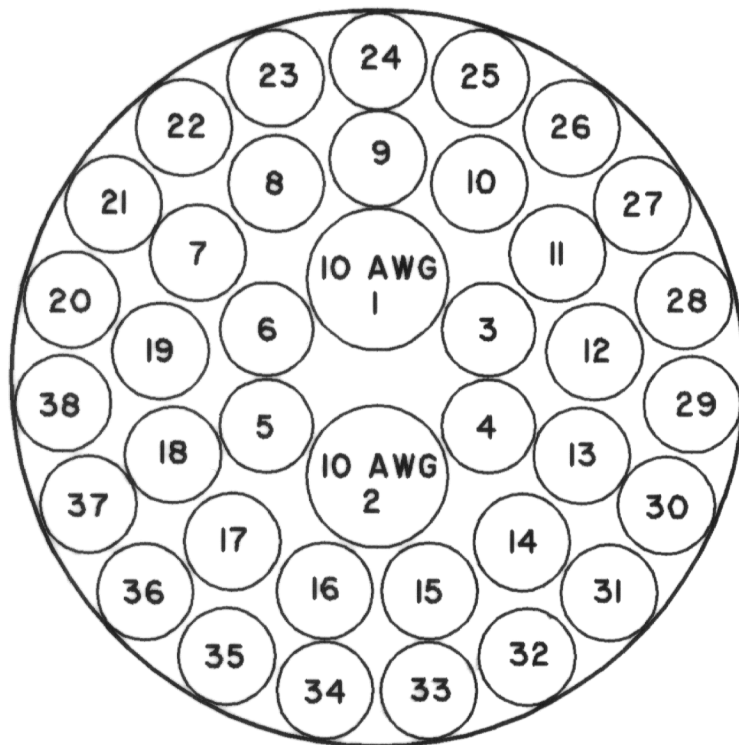

38 - CONDUCTOR CABLE
CROSS SECTIONAL VIEW

NOTE FOR 38 CONDUCTOR CABLE:

1. 1 AND 2 ARE 10 GAUGE AWG COPPER STRANDED INSULATED WIRE .
2. 3-38 ARE 14 GAUGE AWG COPPER SOLID INSULATED WIRE .

			REFERENCE SPEC. NO.	ENGINEER'S SEAL	THE CITY OF WINNIPEG PUBLIC WORKS DEPARTMENT TRANSPORTATION DIVISION	
			DESIGNED BY N.K.B. 04/03/30	CHECKED BY		
			DRAWN BY B.H.	SCALE N.T.S.		
			APPROVED BY	DATE 2004.03.30		
I. REDRAWN TO CAD. FILE	04/03/26	B.H.			SPECIFICATIONS FOR TRAFFIC SIGNAL CABLE GEOMETRY FOR 22 AND 38 CONDUCTOR CABLES	
NO.	REVISIONS	DATE	BY		SHEET OF CAD FILE DWG. NUMBER CITY DRAWING NUMBER ST-127	