




PROVIDE 3-2x6 AT 32" O.C. AT WALLS BEHIND SINKS AS SOLID WD BLOCKING FOR CONC SINK BRACKETS SUPPLIED BY CITY

DIMENSIONS SHOWN FOR CURVED WALLS ARE TO INSIDE FACE OF STUD WALLS WHICH ARE EQUIVALENT TO INSIDE FACE OF CONC GRADE BEAM

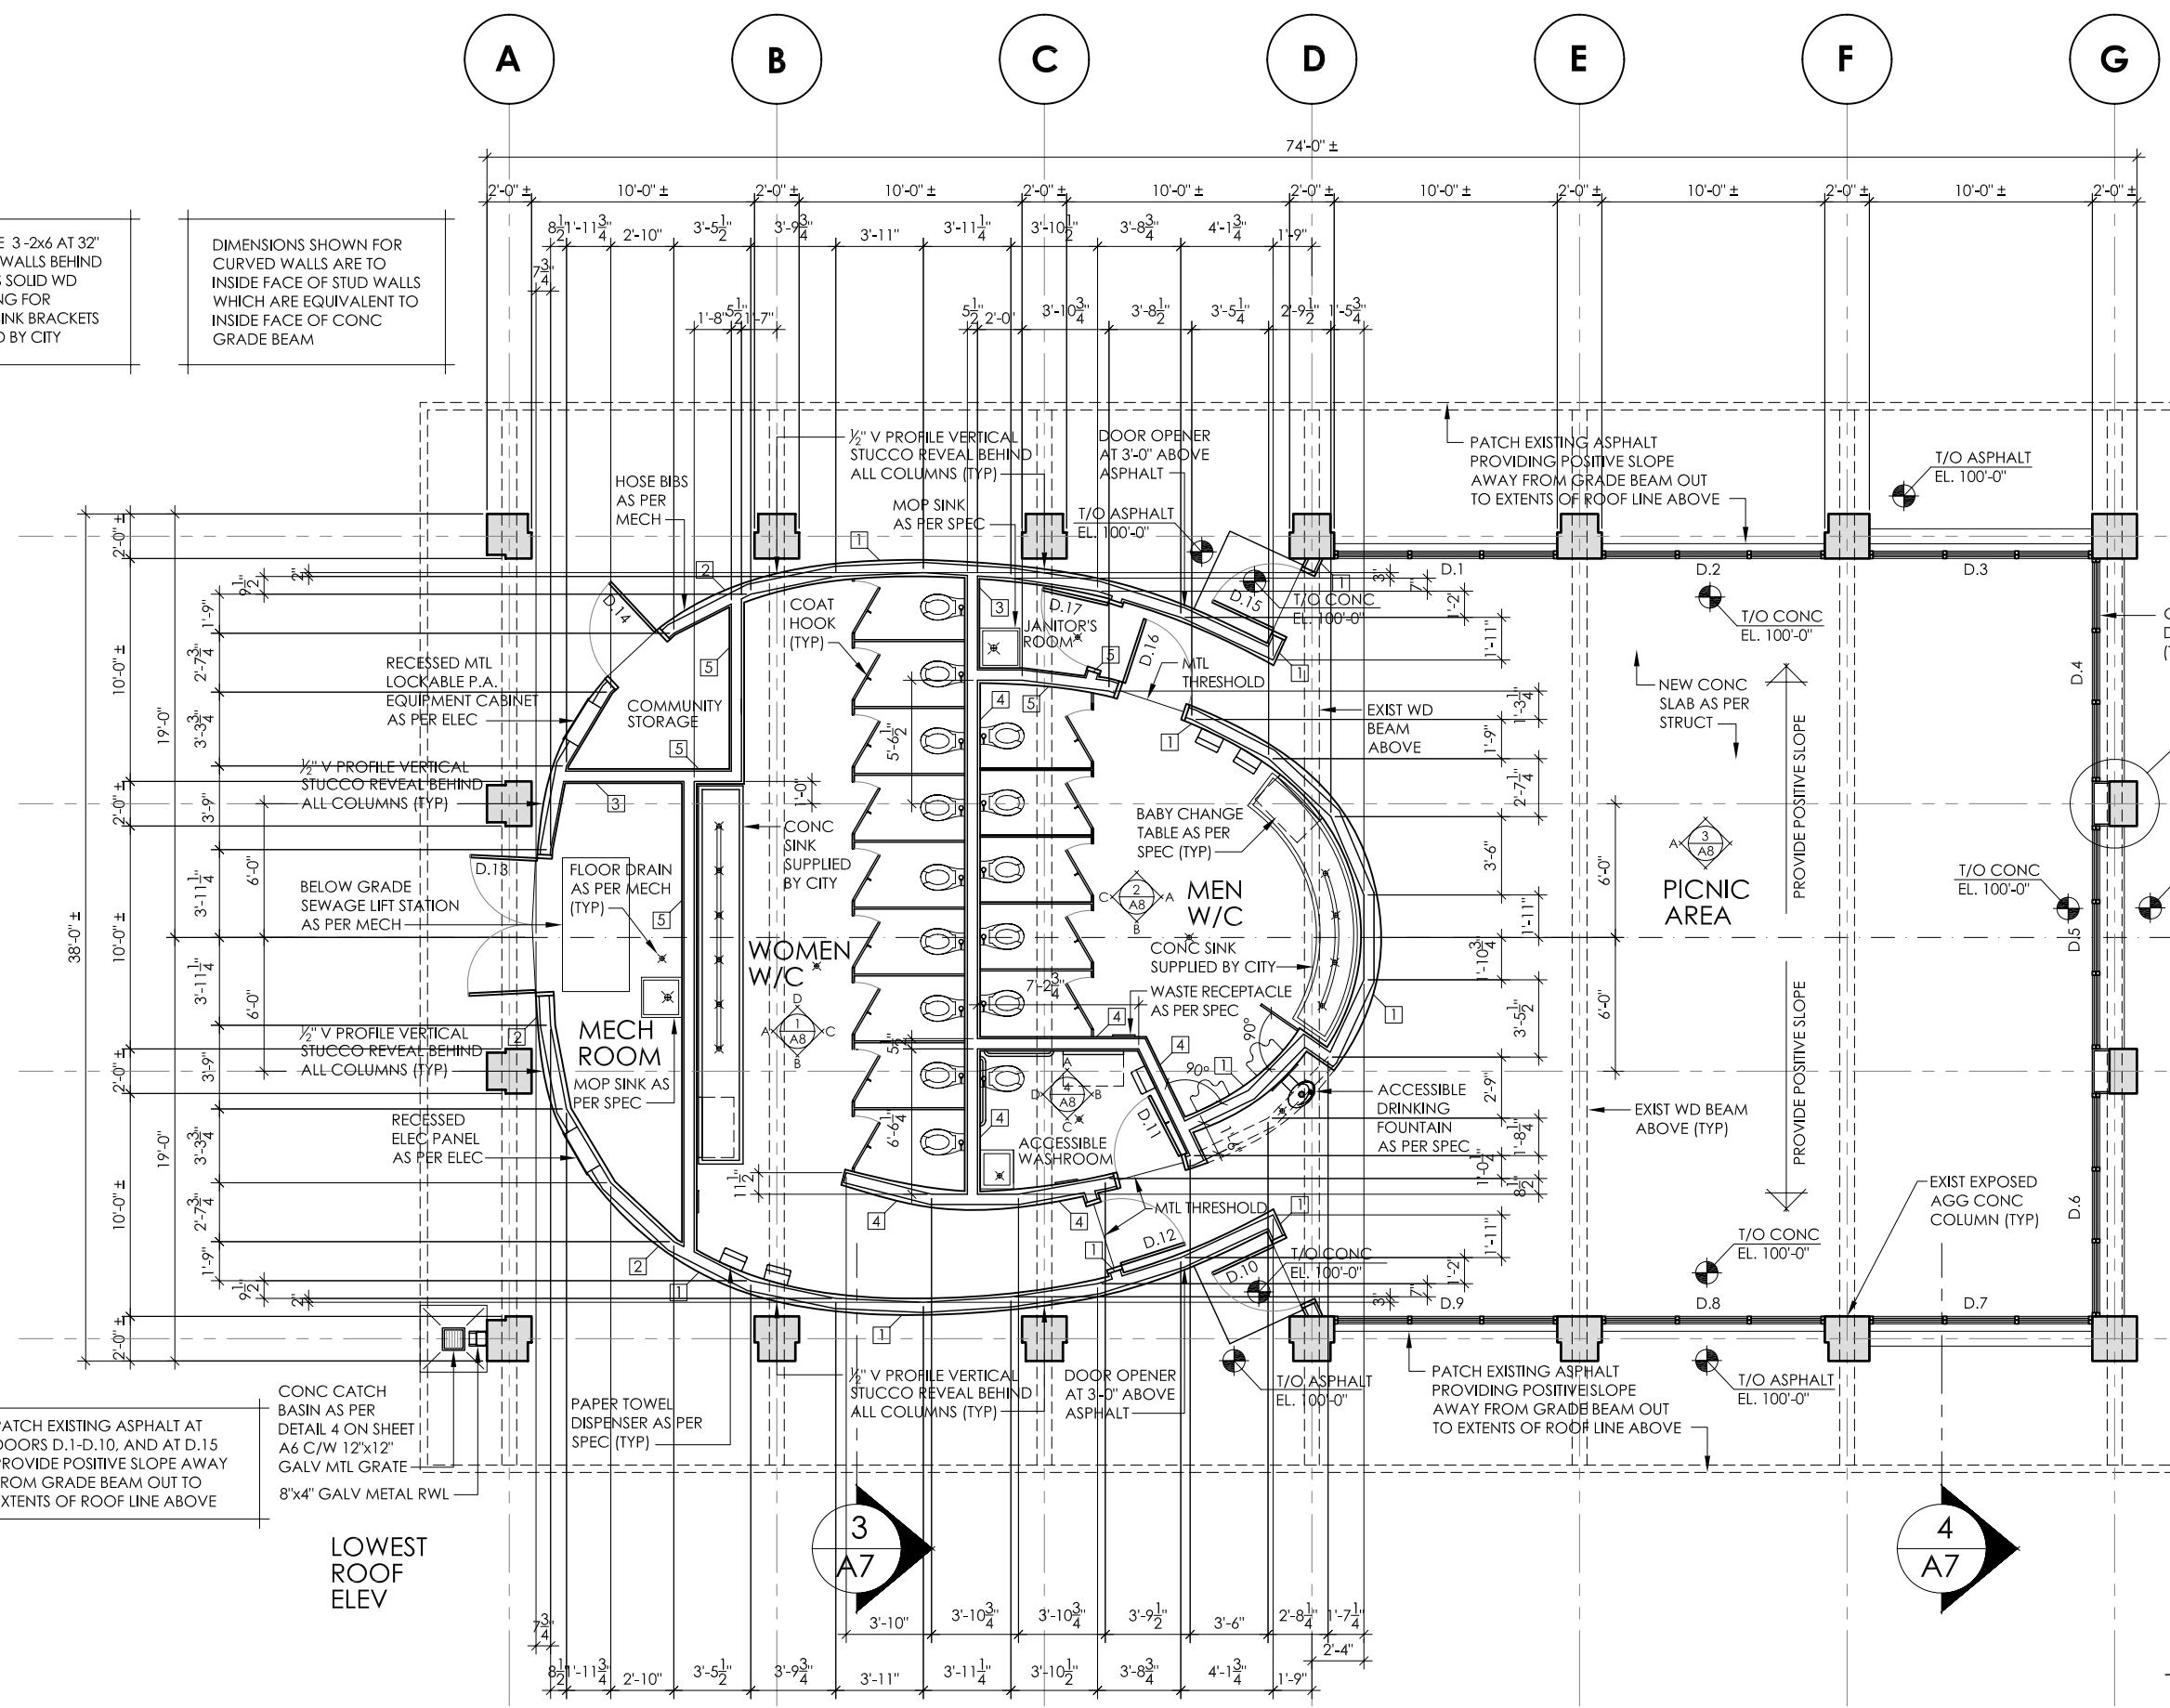

HIGHEST ROOF ELEV

PATCH EXISTING ASPHALT AT DOORS D.1-D.10, AND AT D.15 PROVIDE POSITIVE SLOPE AWAY FROM GRADE BEAM OUT TO EXTENTS OF ROOF LINE ABOVE

CONC CATCH BASIN AS PER DETAIL 4 ON SHEET A6 C/W 12"x12" GALV MTL GRATE 8"x4" GALV METAL RWL

LOWEST ROOF ELEV

1 FLOOR PLAN
1/8" = 1'-0"