



KEY NOTES

- 1 EXISTING RETURN GRILLES AND DUCTWORK TO REMAIN.
- 2 EXISTING FLOOR SUPPLY GRILLES TO BE DEMOLISHED. COORDINATE PATCHING WITH ARCHITECTURAL.
- 3 EXISTING FLOOR SUPPLY GRILLES SERVING AUDITORIUM TO REMAIN.
- 4 EXISTING FLOOR SUPPLY GRILLES SERVING POOL AREA TO REMAIN
- 5 EXISTING FRESH AIR SUPPLY DUCTWORK TO BE DEMOLISHED. COORDINATE SHAFT ACCESS AND DEMO WITH ARCHITECTURAL.
- 6 DEMOLISH EXISTING EXHAUST DUCTWORK COMPLETE WITH FAN, CONTROLS AND POWER.
- 7 LAST GRILLE ON EXISTING RETURN DUCTWORK TO BE REMOVED TO ACCOMMODATE MATERIAL LIFT AND CAPPED.
- 8 EXISTING DUCT RISER DOWN TO BASEMENT TO BE REMOVED.
- 9 EXISTING AUDITORIUM RETURN DUCTWORK TO REMAIN.
- 10 EXISTING DUCTWORK WITHIN SHAFT TO BE REMOVED.
- 11 EXISTING SUPPLY DUCTWORK TO REMAIN.
- 12 EXISTING CHIMNEY WITHIN SHAFT TO BE REMOVED ENTIRELY.
- 13 EXISTING VENTILATION AND COMBUSTION AIR DUCTWORK TO BE REMOVED ENTIRELY.
- 14 EXISTING EXHAUST DUCTWORK SERVING POOL CHANGEROOMS TO BE REMOVED.
- 15 RETURN DUCTWORK UP TO EXISTING ROOFTOP UNIT TO BE REMOVED.
- 16 EXISTING EXHAUST FAN WITHIN VESTIBULE TO BE REMOVED COMPLETE WITH DUCTWORK, CONTROLS AND POWER.
- 17 DEMOLISH EXISTING CONDENSING UNIT INCLUDING ALL REFRIGERANT PIPING, CONTROL WIRING AND WALL BRACKET. UNIT IS LOCATED AT HIGH LEVEL ON THE MAIN FLOOR.
- 18 EXISTING EXHAUST FAN AND DUCTWORK TO BE REMOVED.
- 19 EXISTING OUTDOOR COMPRESSOR OF AC/UCI MINI SPLIT TO BE REUSED FOR POOL RECEPTION AREA. UNIT IS LOCATED AT HIGH LEVEL ON THE MAIN FLOOR.
- 20 EXISTING INDOOR UNIT OF AC/UCI MINI SPLIT TO BE REUSED FOR POOL RECEPTION AREA. DRAIN ALL REFRIGERANT AND SUCTION PIPING. MODIFY, EXTEND AND RECONNECT REFRIGERANT PIPING AND CONTROL WIRING TO NEW LOCATION. CONFIRM OPERATION OF AC/UCI UNIT.

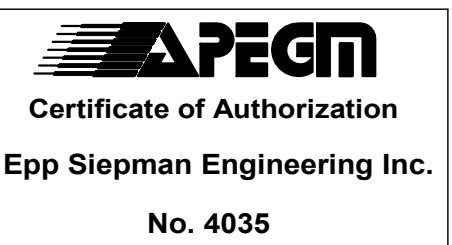

This is a print of a document that has been electronically authenticated with technology authorized by the APEGM. The original is in electronic form.

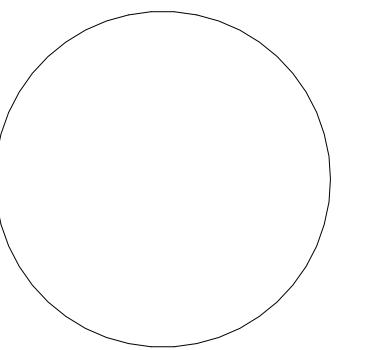

LEVEL 1 - HVAC DEMOLITION 1
 3/32" = 1'-0" MH2.1

This drawing must not be scaled. The contractors shall verify all dimensions and other data on site prior to commencement of work. Discrepancies, errors, and omissions are to be reported to Public City Architecture Inc. prior to proceeding with the Work.

Drawings and specifications as instruments of service are the property of Public City Architecture Inc. the copyright in the same being reserved.

No reproduction or revision to these drawings may be made without the permission of Public City Architecture Inc., and when made, must bear their name. All prints to be returned to Public City Architecture Inc. upon request.

Project
ST. JAMES CIVIC CENTRE

Drawing
LEVEL 1 DEMOLITION - HVAC PLAN

Drawn By: GC	Review By: JS
Scale: 3/32" = 1'-0"	Tender No: 1176-2019
Date: 11/06/19	
Sheet:	MH2.1