


TITLE

Pedra Double Timber Edging Detail

SCD 651AR

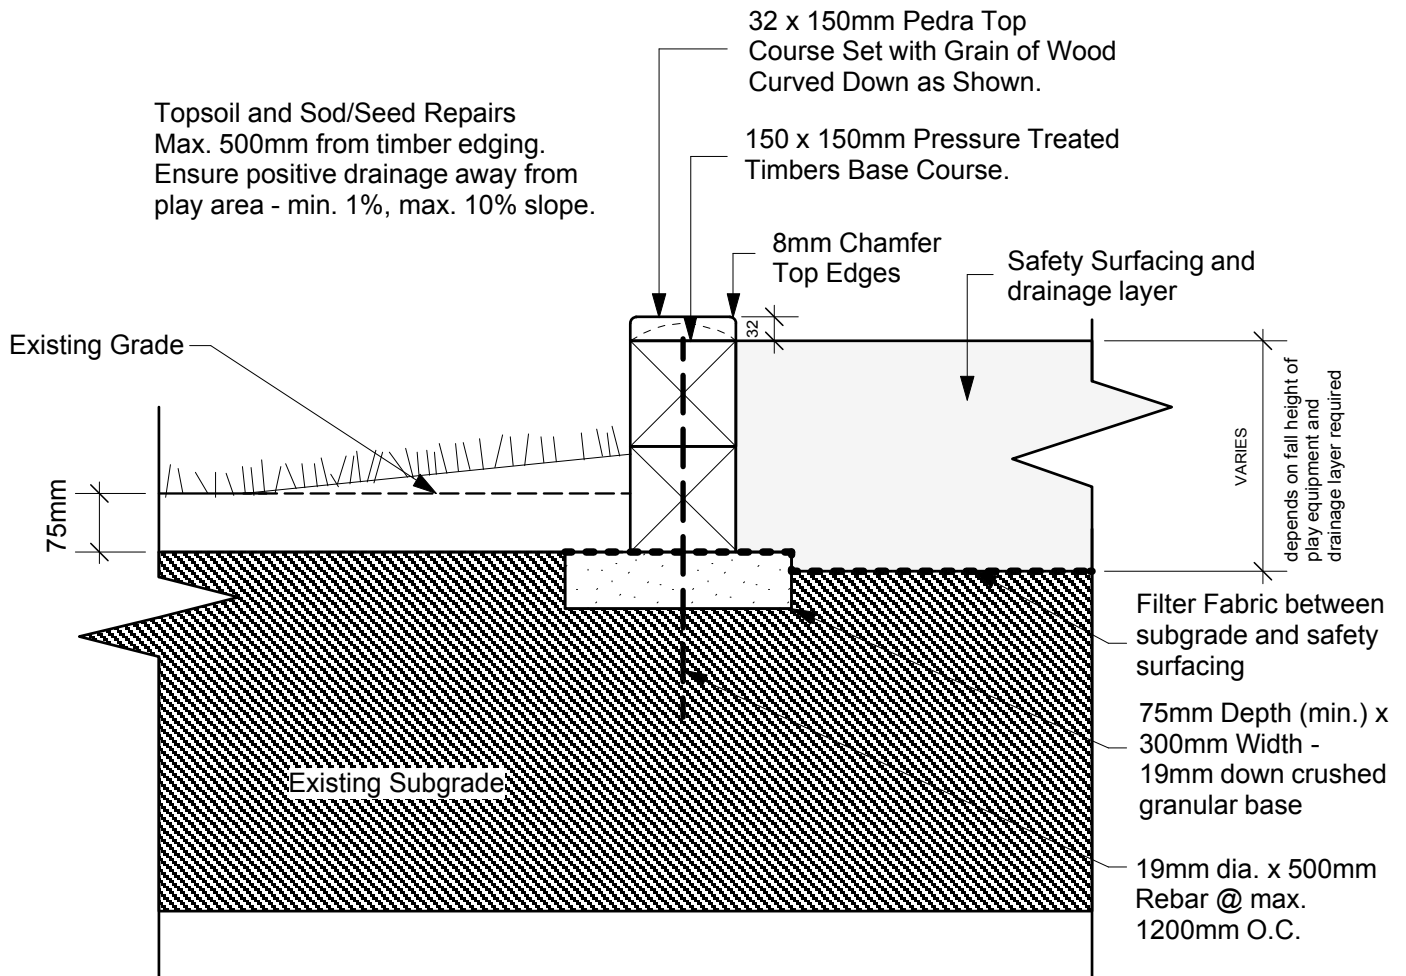

Topsoil and Sod/Seed Repairs
Max. 500mm from timber edging.
Ensure positive drainage away from
play area - min. 1%, max. 10% slope.

32 x 150mm Pedra Top
Course Set with Grain of Wood
Curved Down as Shown.

150 x 150mm Pressure Treated
Timbers Base Course.

8mm Chamfer
Top Edges

Safety Surfacing and
drainage layer

Existing Grade

75mm

VARIES
depends on fall height of
play equipment and
drainage layer required

Existing Subgrade

Filter Fabric between
subgrade and safety
surfacing

75mm Depth (min.) x
300mm Width -
19mm down crushed
granular base

19mm dia. x 500mm
Rebar @ max.
1200mm O.C.

Base course timber shall be pinned with minimum of two (2)
19mm dia. rebar @ max. 1200mm O.C.
Pedra top course shall be pre-drilled and screwed down using
screws treated for ACQ use and sized to suit. Two parallel screws
at each end of the timber at 600mm O.C. Only use butt joints for
straight sections of pedra. Min. length of timbers to be 1200mm.
Install longest lengths possible.

NOTE:

ALL DIMENSIONS SHOWN
ARE IN MILLIMETERS.

Scale: NTS

Drawn By: H.F.

Date: Jan.09

THE CITY OF WINNIPEG

Planning, Property and Development Department

Planning and Land Use Division

Unit 15 - 10 Fort Street, Winnipeg, MB, R3C 4X5

