



NOTES:
1. GRASS SEEDS SHALL BE FRESH, HULLED AND PURE (95% MIN.) WITH ANTICIPATED GERMINATION RATE OF 85%.

A GRASS SEEDING
L403 | L501 SCALE 1:10

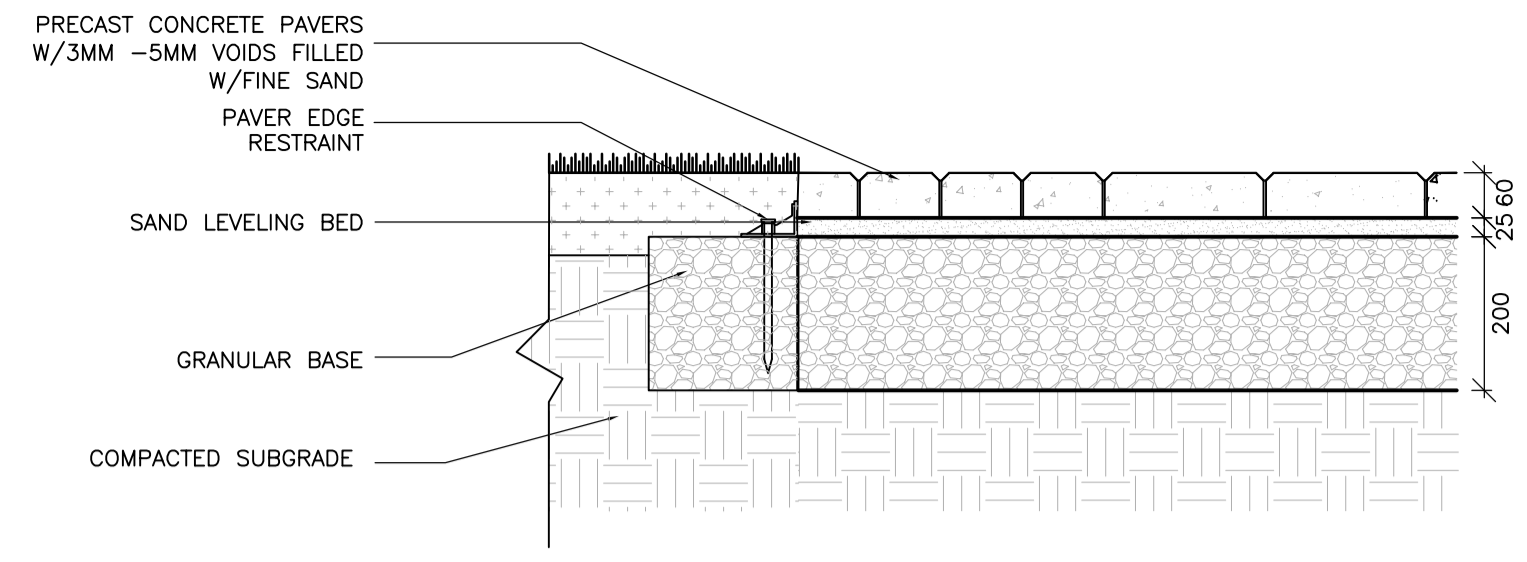


NOTES:
1. CONCRETE UNIT PAVER THICKNESS TO BE 60MM. APPROXIMATE DIMENSIONS TO BE 105X210MM.
2. CONCRETE UNIT PAVER COLOURS TO BE SELECTED ACCORDING TO DETAIL PLANS AND TO BE APPROVED BY LANDSCAPE ARCHITECT.

B CONCRETE UNIT PAVERS WITH PLASTIC EDGE RESTRAINT
L406 | L501 SCALE 1:10

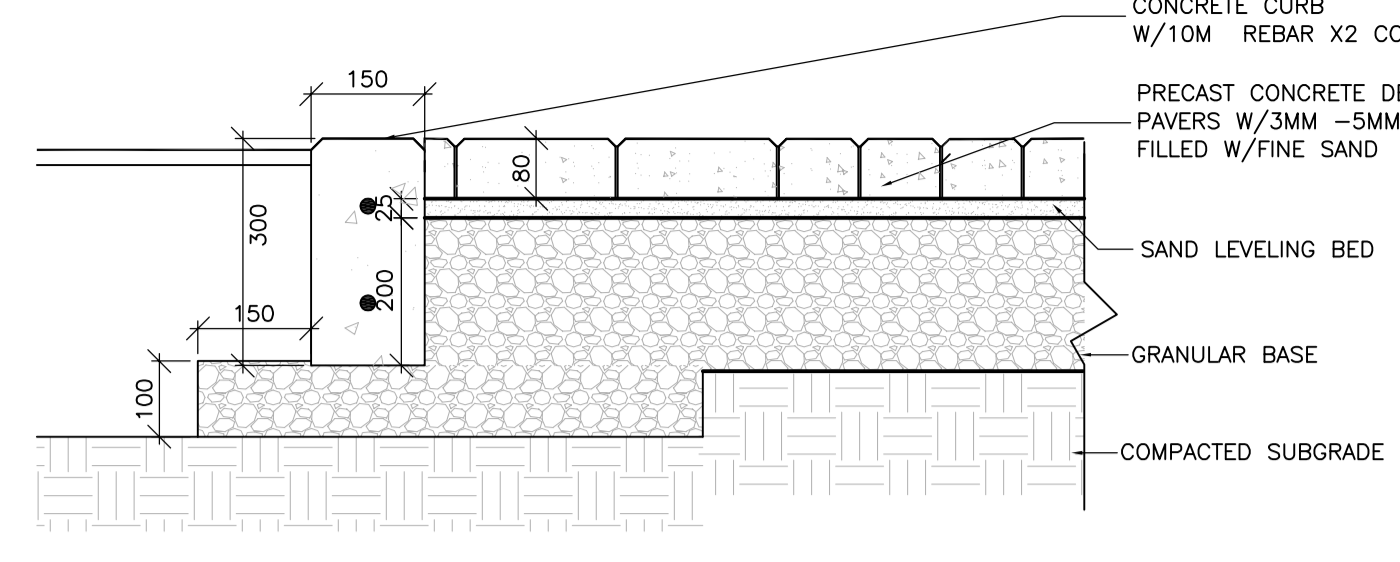


NOTES:
1. CONCRETE UNIT PAVER THICKNESS TO BE 60MM. APPROXIMATE DIMENSIONS TO BE 105X210MM.
2. CONCRETE UNIT PAVER COLOURS TO BE SELECTED ACCORDING TO DETAIL PLANS AND TO BE APPROVED BY LANDSCAPE ARCHITECT.

C CONCRETE UNIT PAVERS WITH CONCRETE CURB RESTRAINT
L406 | L501 SCALE 1:10

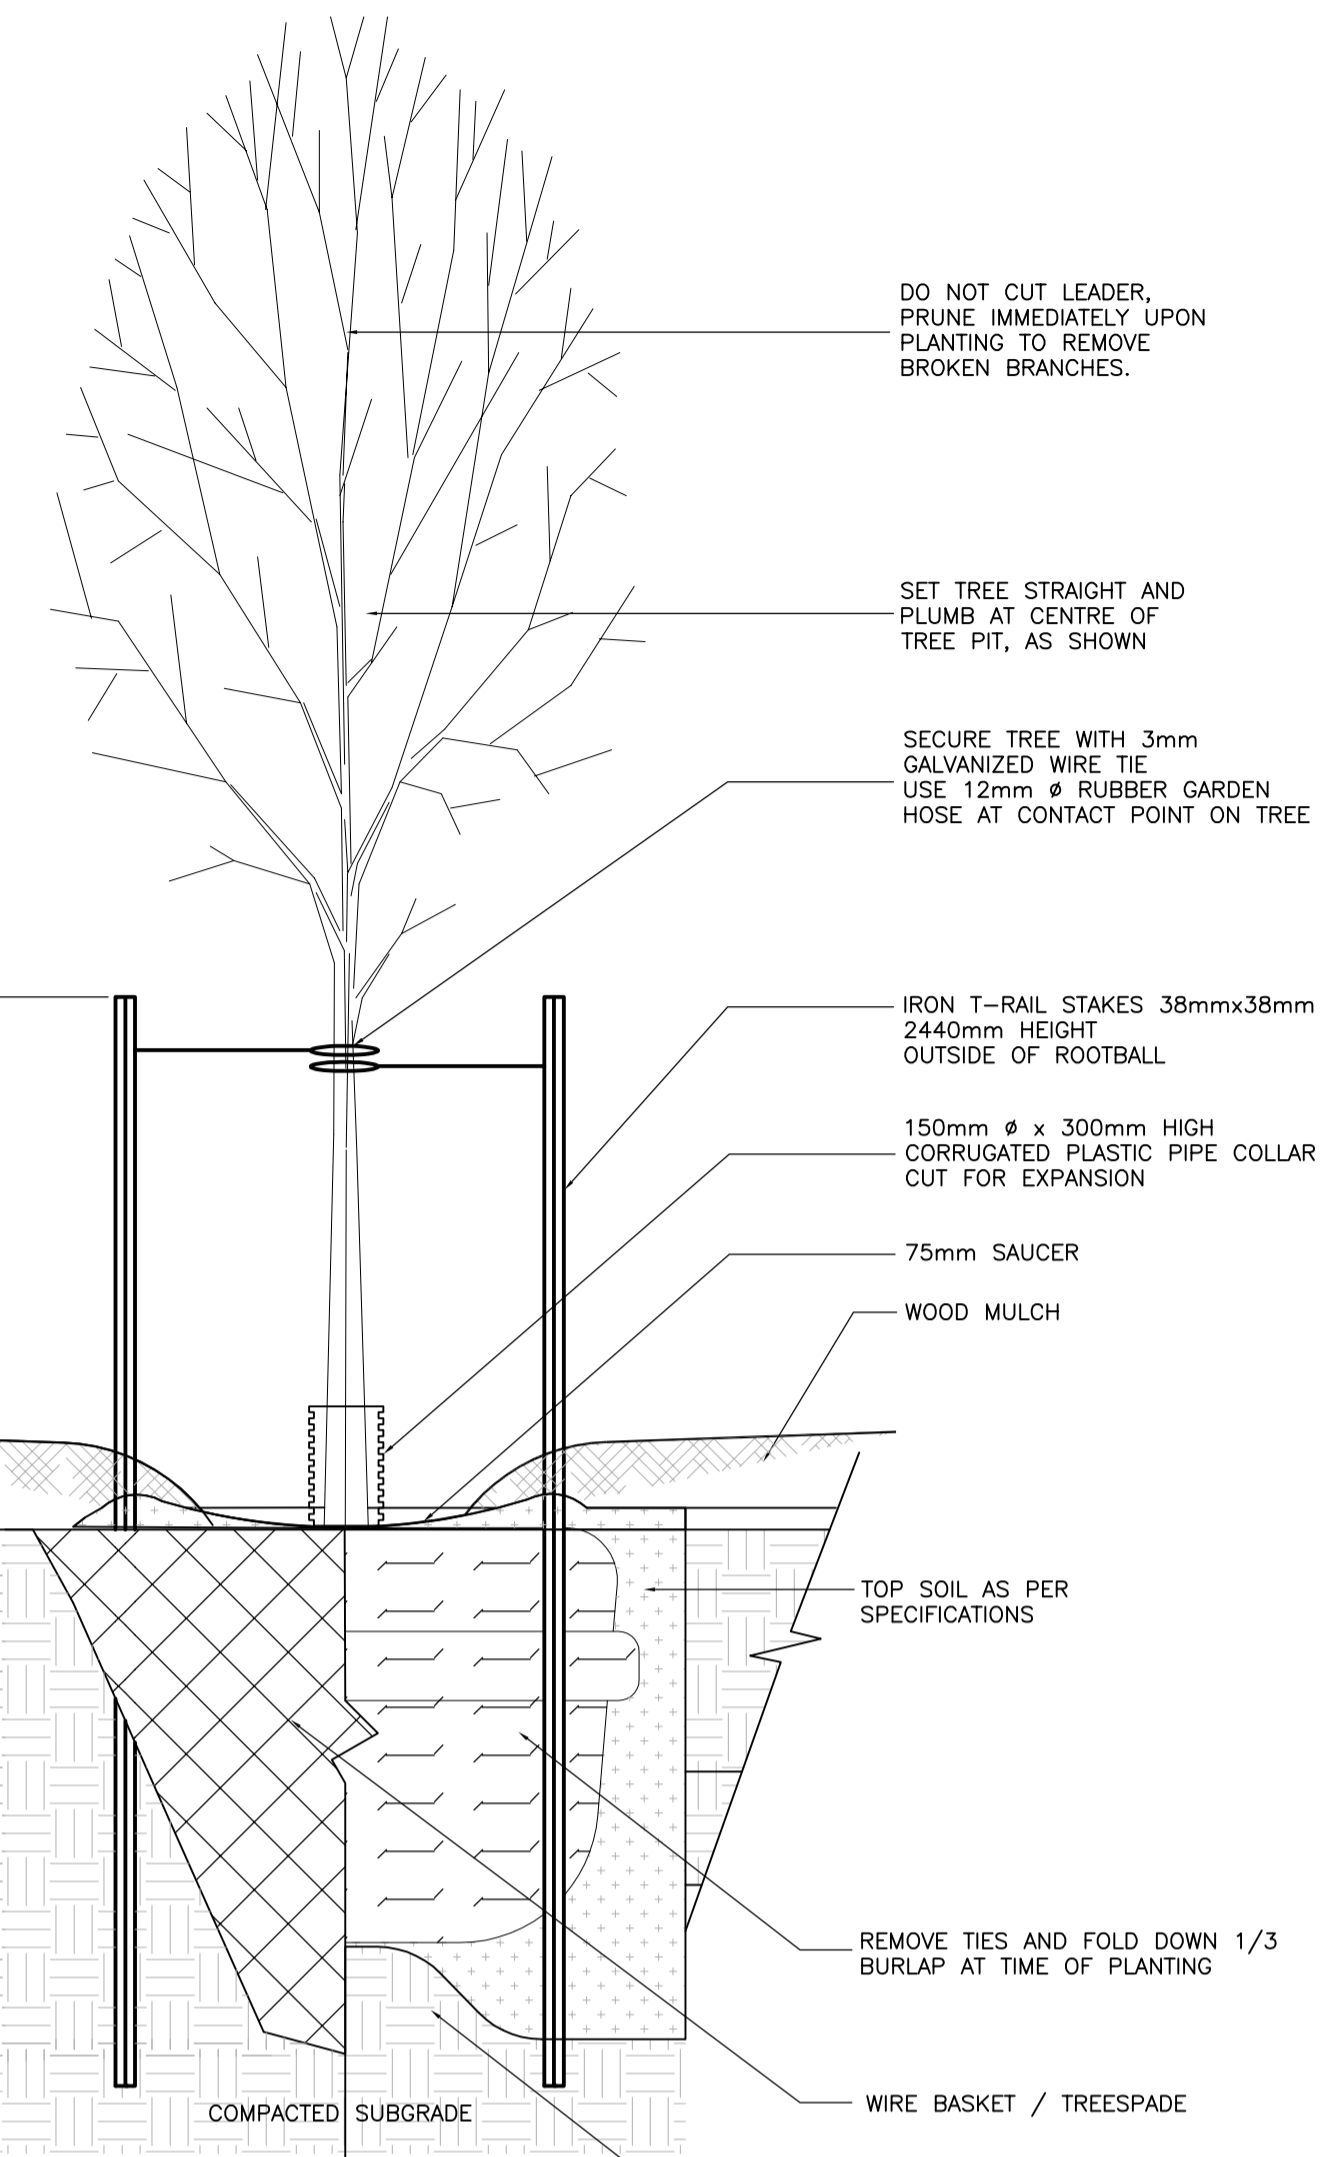


NOTES:
1. REFER TO LANDSCAPE ARCHITECTURAL PLANTING PLAN FOR LOCATION OF TREES.
2. LANDSCAPE ARCHITECT TO INSPECT AND APPROVE IN WRITING ALL PLANT MATERIAL PRIOR TO PLANTING.
3. SCARIFY COMPACTED SUB-GRADE AT BASE OF TREE PIT TO A DEPTH OF 300MM.
4. DO NOT ALLOW WIRE TO CONTACT STEM.


E TREE PLANTING (TYP.)
L403 | L501 SCALE 1:10

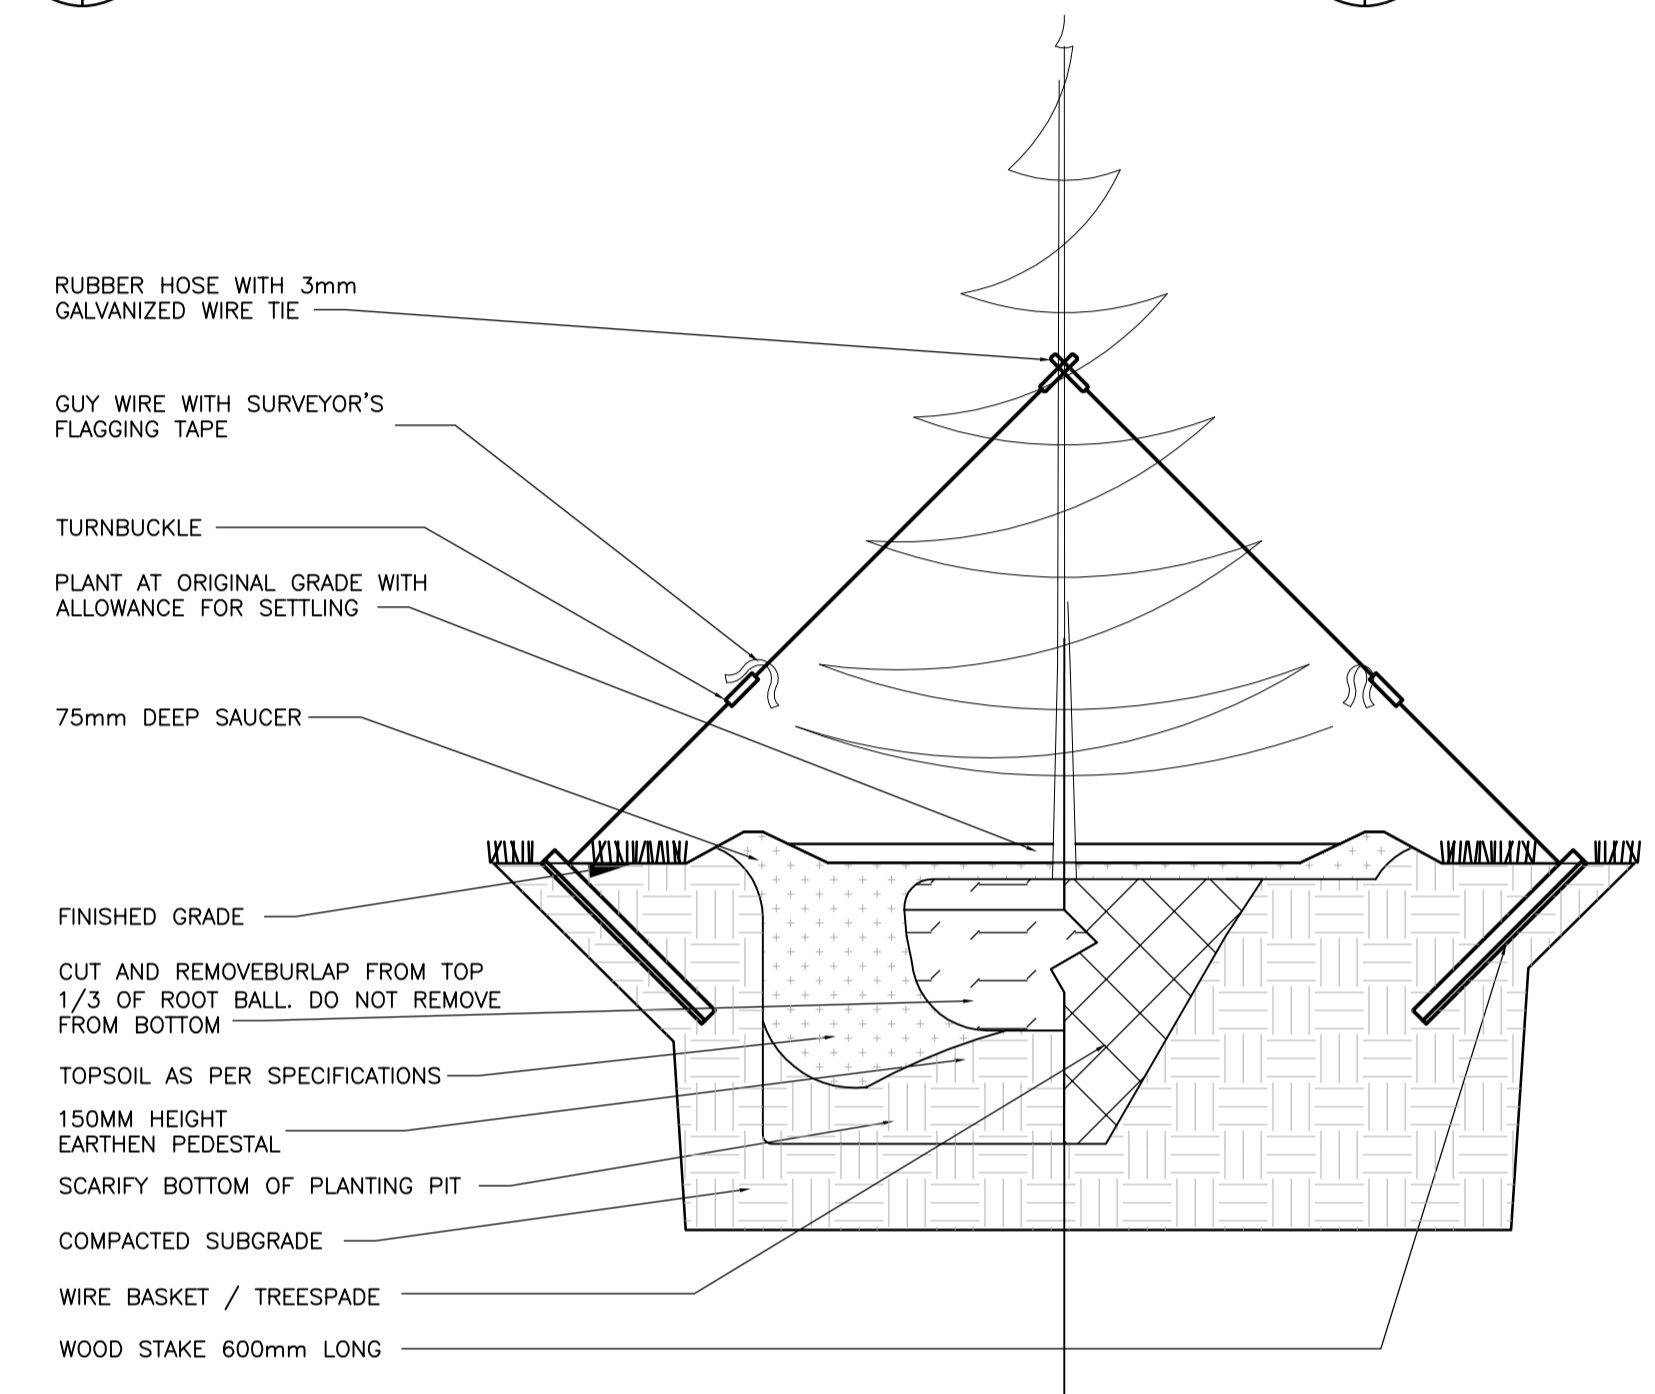

D TREE PLANTING AND STAKING (TYP.) (CONIFEROUS)
L403 | L501 SCALE 1:10

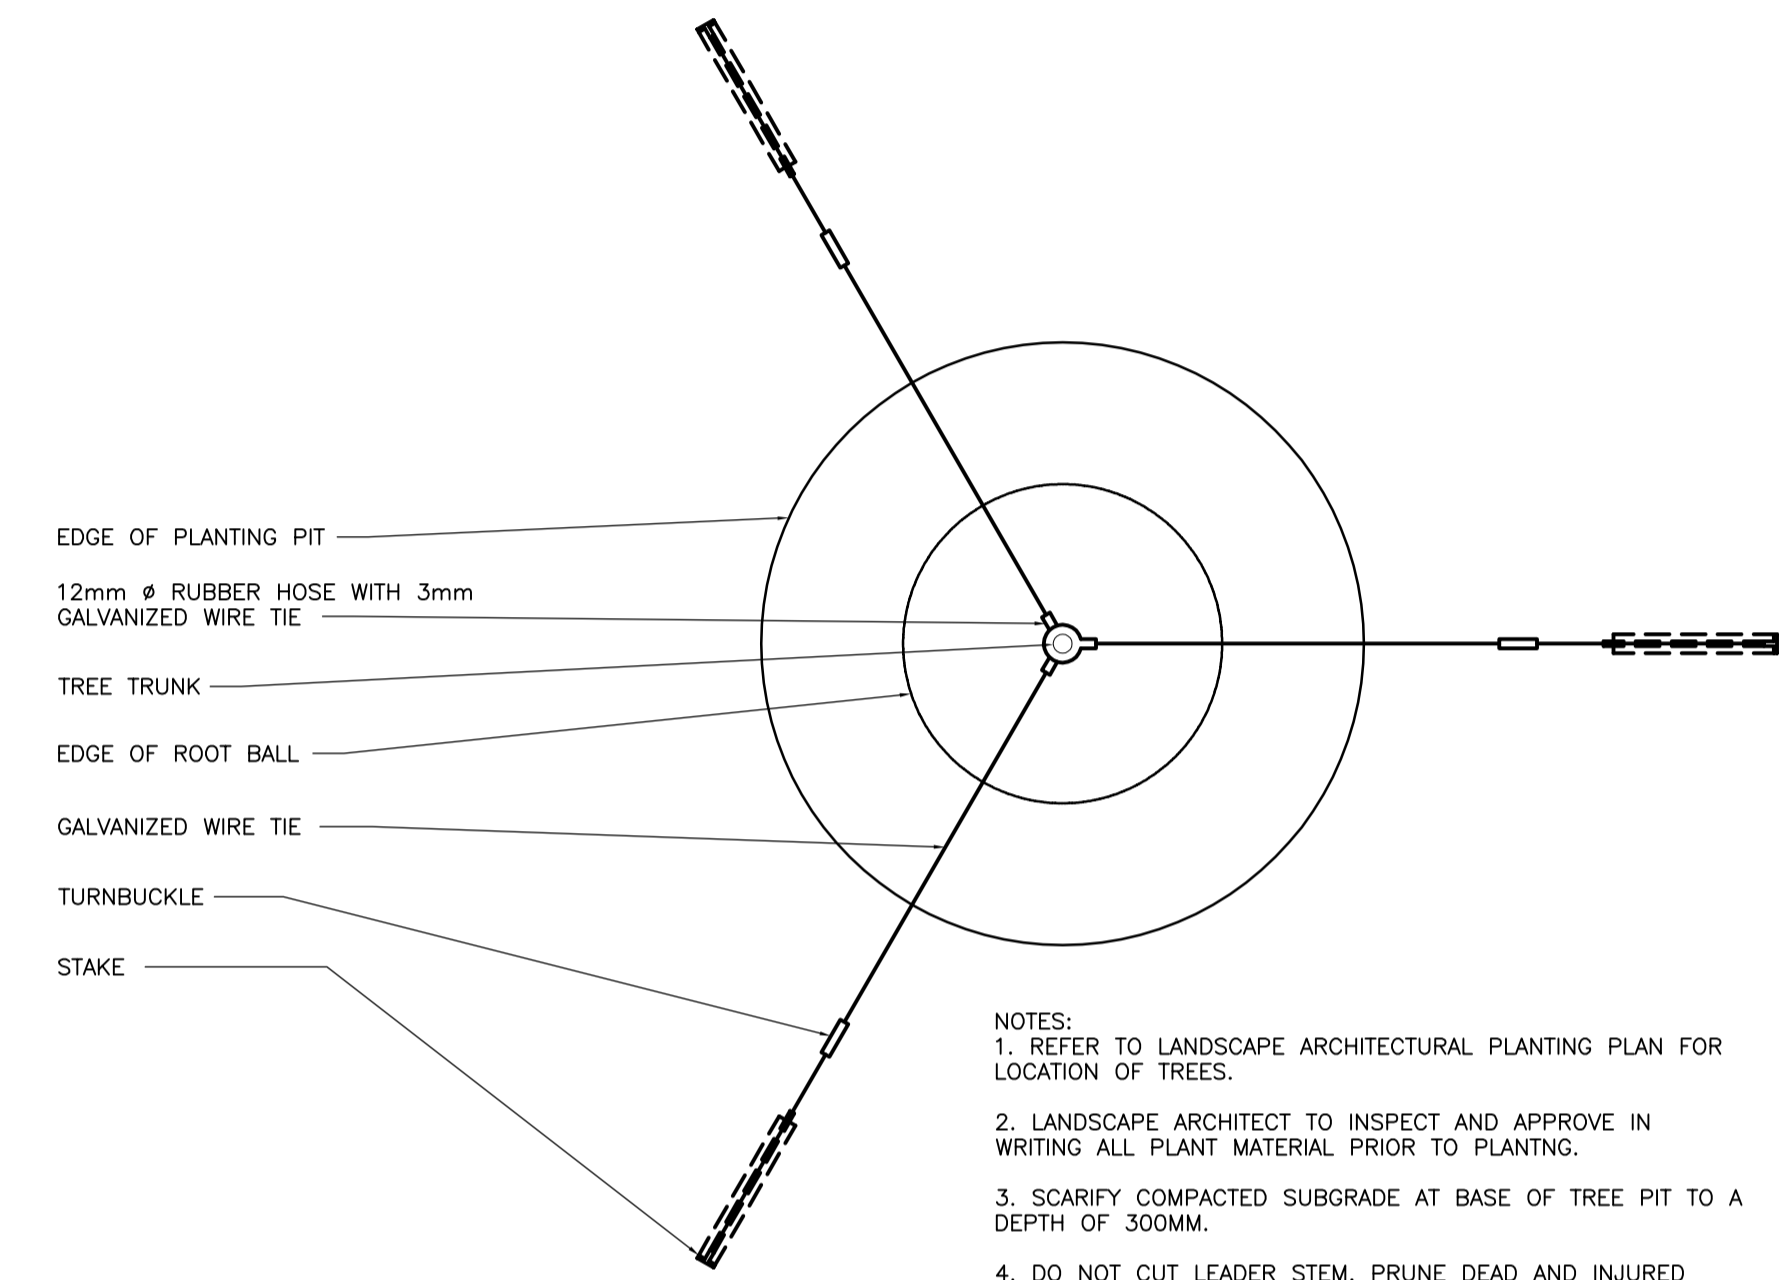


NOTES:
1. REFER TO LANDSCAPE ARCHITECTURAL PLANTING PLAN FOR LOCATION OF TREES.
2. LANDSCAPE ARCHITECT TO INSPECT AND APPROVE IN WRITING ALL PLANT MATERIAL PRIOR TO PLANTING.
3. SCARIFY COMPACTED SUBGRADE AT BASE OF TREE PIT TO A DEPTH OF 300MM.
4. DO NOT CUT LEADER STEM. PRUNE DEAD AND INJURED BRANCHES AND 1/3 OF BRANCHING STRUCTURE.
5. DO NOT ALLOW WIRE TO CONTACT STEM.

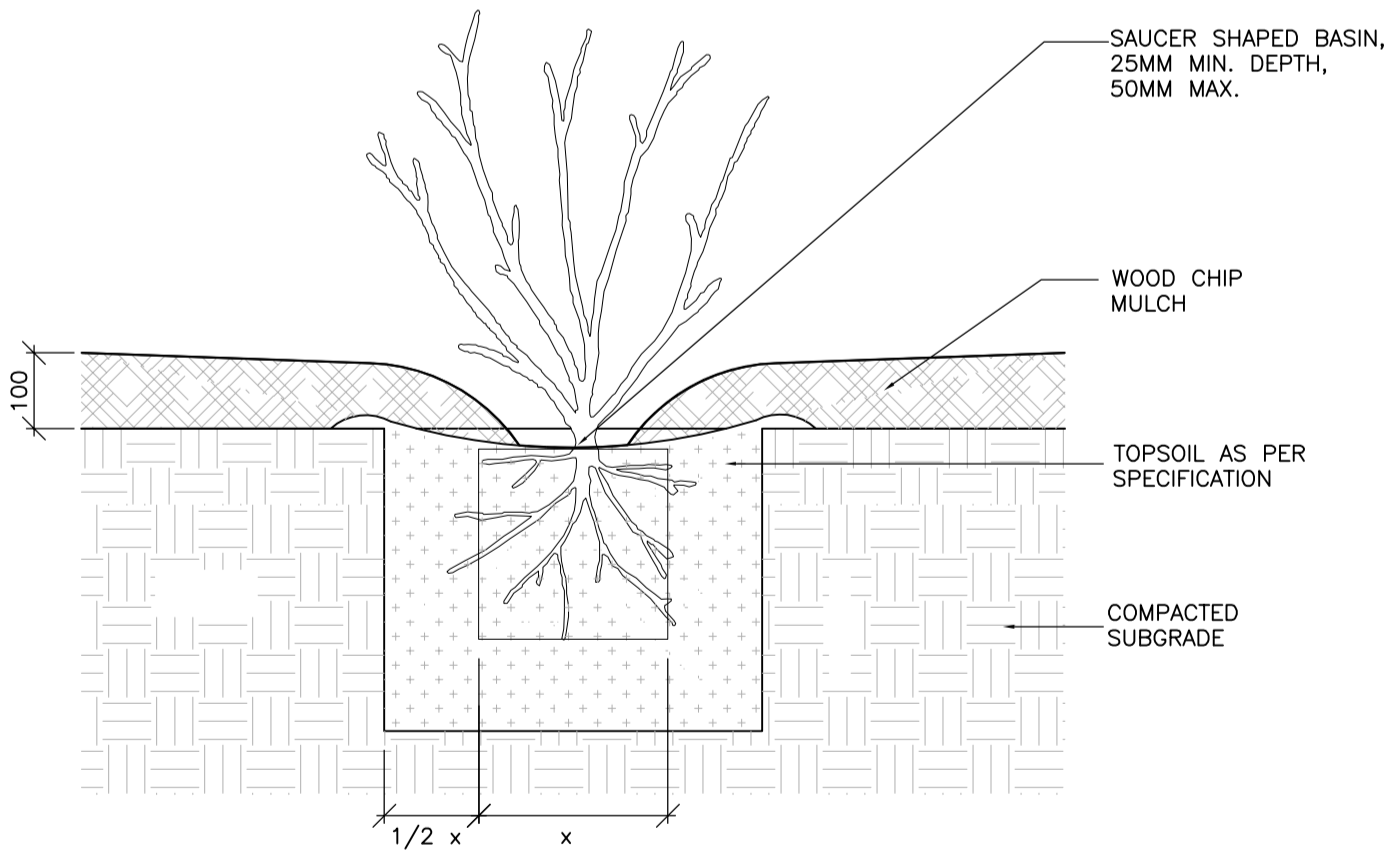


NOTES:
1. PLANT PIT SHALL BE DUG TWICE DIAMETER OF THE ROOT BALL.
2. SCARIFY COMPACTED SUBGRADE TO 300MM DEPTH.
3. LANDSCAPE ARCHITECT TO INSPECT AND APPROVE IN WRITING ALL PLANT MATERIAL PRIOR TO PLANTING.

F SHRUB PLANTING IN HOLE (TYP.)
L406 | L501 SCALE 1:10

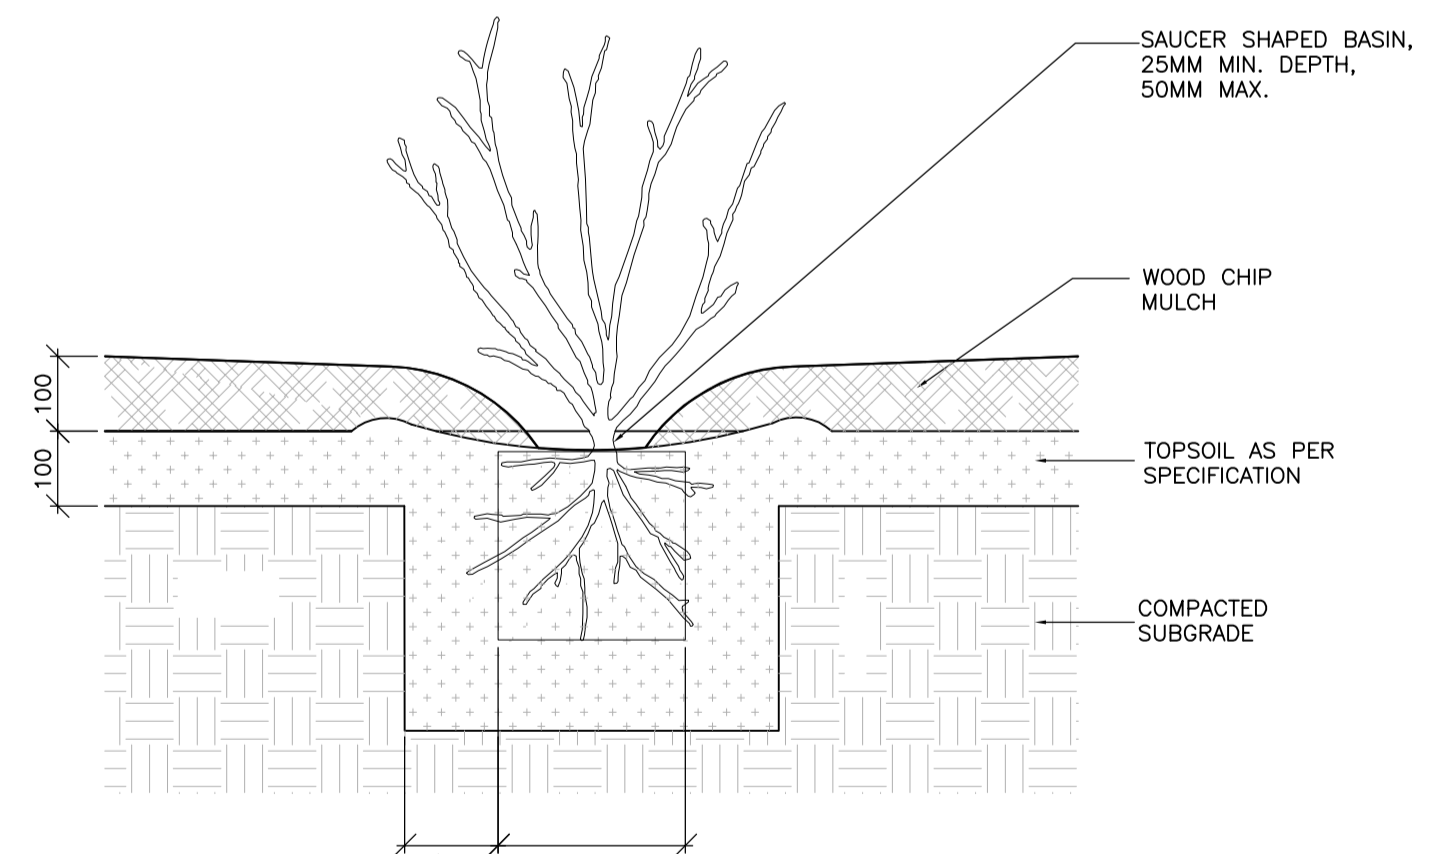

NOTES:
1. PLANT PIT SHALL BE DUG TWICE DIAMETER OF THE ROOT BALL.
2. SCARIFY COMPACTED SUBGRADE TO 300MM DEPTH.
3. LANDSCAPE ARCHITECT TO INSPECT AND APPROVE IN WRITING ALL PLANT MATERIAL PRIOR TO PLANTING.

G SHRUB PLANTING IN BED AT NODES (TYP.)
L406 | L501 SCALE 1:10

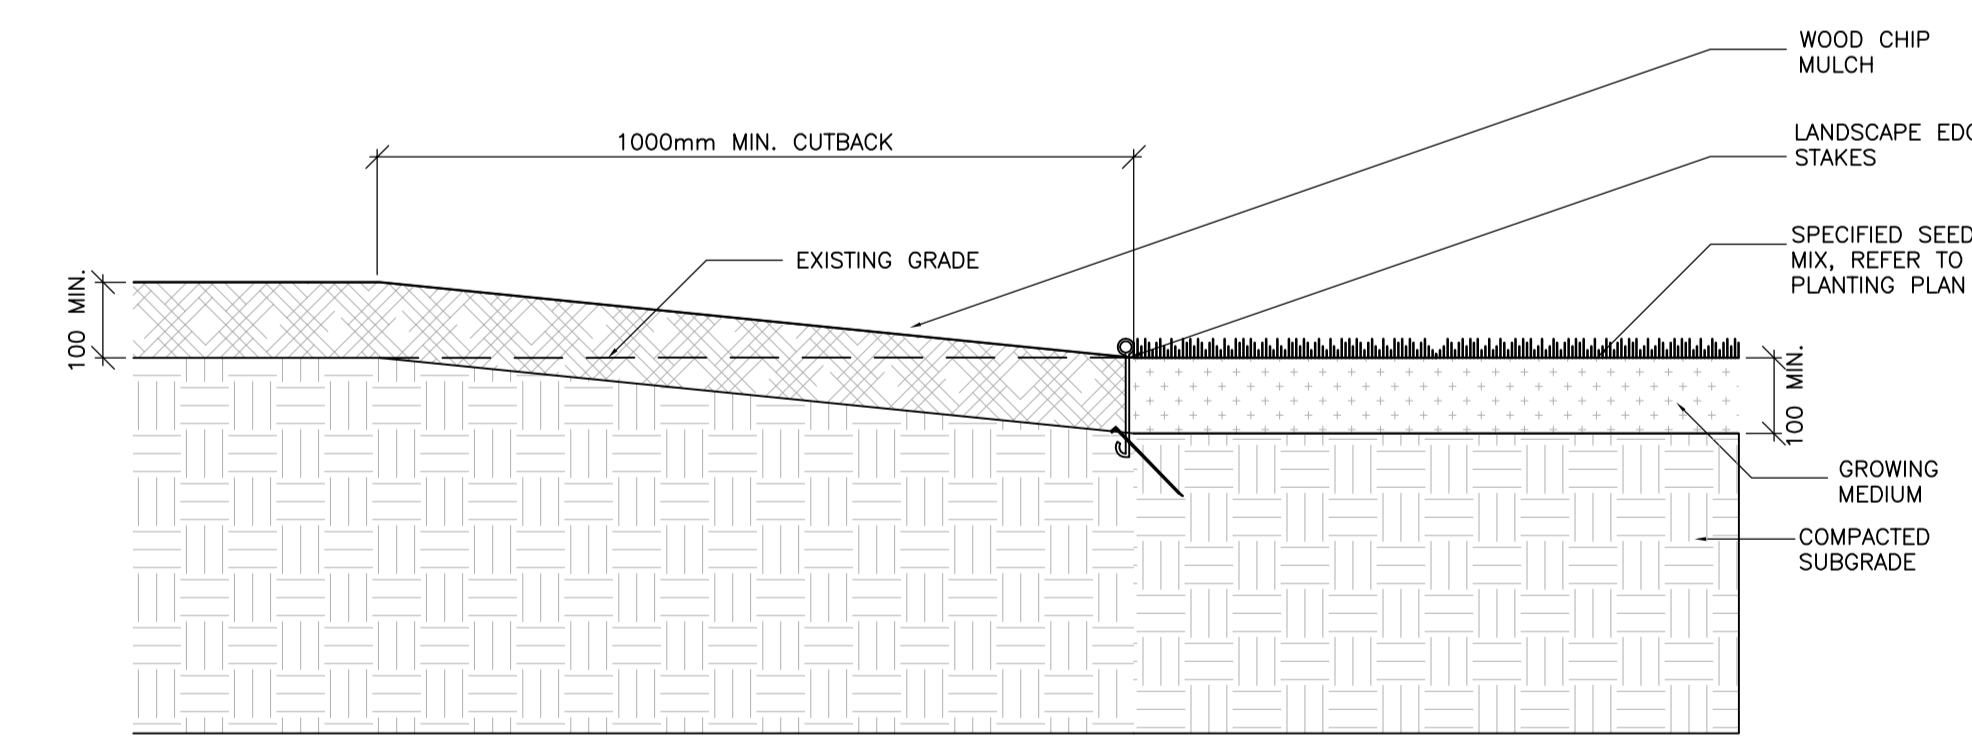

NOTES:
1. WOOD CHIP MULCH SHOULD BE 'CLEAN', FREE OF NON-ORGANIC DEBRIS AND LARGE BRANCHES OR PIECES OF WOOD.
2. 140mm HEIGHT, GRADE A PREMIUM BLEND MEDIUM DENSITY POLYETHYLENE LANDSCAPE EDGING TO BE INSTALLED AND SECURED WITH STAKES SET AT 45 DEGREE ANGLES.
3. LANDSCAPE EDGING JOINTS TO OVERLAP 75mm MIN.
4. MAX DISTANCE BETWEEN STAKES SHOULD BE 2m AND ALL JOINTS SHOULD BE STAKED THROUGH BOTH PIECES.
5. MINIMUM LENGTH OF ANY SINGLE EDGING SEGMENT NOT TO BE LESS THAN 1.5m.
6. LANDSCAPE ARCHITECT TO INSPECT AND APPROVE IN WRITING THE LAYOUT OF ALL BEDS PRIOR TO EXCAVATION.

H FALSE PLANTING BED WITH EDGING (TYP.)
L403 | L501 SCALE 1:10

LOCATION APPROVED UNDERGROUND STRUCTURES	
SUPV. U/G STRUCTURES COMMITTEE	DATE
NOTE: LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.	
NO.	REVISIONS
0	ISSUED FOR TENDER
11.07.15	V.M.M.

B.M. ELEV.	
DESIGNED BY	DB
DRAWN BY	DB
HOR. SCALE:	1:10
VERTICAL:	
NO.	DATE
0	FEB. 03, 2010

Smith Carter
SMITH CARTER ARCHITECTS AND ENGINEERS INC.
1600 BUFFALO PLACE
WINNIPEG, MANITOBA
R3T 6B8

Stantec

DESIGNED BY	DB	CHECKED BY	BB
DRAWN BY	DB	APPROVED BY	
RELEASED FOR CONSTRUCTION:		DATE	

ENGINEER'S SEAL
CONSULTANT DRAWING NO. L-501

THE CITY OF WINNIPEG
PUBLIC WORKS DEPARTMENT
ENGINEERING DIVISION

Wwarp Part I
KENASTON BOULEVARD EXTENSION-N.B. LANES
NORTH TOWN ROAD TO BISHOP GRANDIN BOULEVARD
LANDSCAPE DETAILS

SHEET	OF
65	65
CAD FILE DRAWING NUMBER	
L-501_LA Details.DWG	
CITY DRAWING NUMBER	
P-3316-46	