


2	ISSUED FOR TENDER	26/05/04	SR
1	ISSUED FOR DEVELOPMENT PERMIT	25/05/04	SR
No.	Revisions	Date	By
Date	Scale		

26-05-04	1:250		
Designed By	Drawn By	Checked By	
JW/SR	JW/IG	SR	

Seals

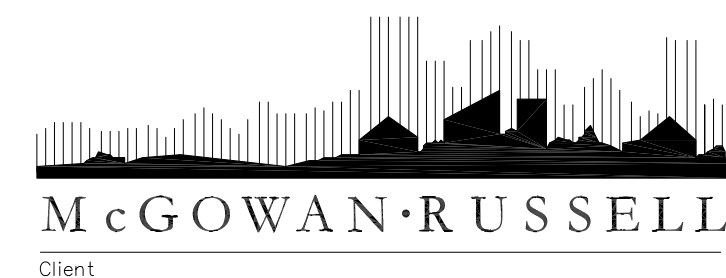

CITY OF WINNIPEG

**BURROWS CENTRAL
PARK RENOVATION
PROJECTS**

**BOYD PARK LAYOUT
PLAN**

Project No. 04-012 Drawing No. L2

GENERAL NOTES

- CONTRACTOR TO LOCATE ALL UNDERGROUND UTILITIES PRIOR TO CONSTRUCTION.
- CONTRACTOR TO CONFIRM ALL DIMENSIONS ON SITE AND REPORT ANY DISCREPANCIES TO THE CONTRACT ADMINISTRATOR PRIOR TO CONSTRUCTION.
- LAYOUT TO BE APPROVED BY CONTRACT ADMINISTRATOR PRIOR TO ANY CONSTRUCTION OR REMOVALS.
- CONSTRUCTION ACCESS TO BE LIMITED TO THE ROUTES SPECIFIED ON SITE BY CONTRACT ADMINISTRATOR.
- ALL DIMENSIONS ARE IN METRIC UNLESS OTHERWISE NOTED. DECIMAL NUMBERS INDICATE METERS.
- CONTRACTOR TO REPAIR ALL ON AND OFF SITE SODDED AREAS, SHRUB BEDS, TREES, CONCRETE, ROAD PAVING AND CURBS ETC., DAMAGED DURING CONSTRUCTION TO CONTRACT ADMINISTRATOR'S SATISFACTION AND TO THE CITY OF WINNIPEG STANDARDS AT HIS/HER OWN COST.
- DURING CONSTRUCTION, CONTRACTOR TO PROTECT TO CITY OF WINNIPEG STANDARDS ALL EXISTING TREES, SIDEWALKS, CURBS, SOD, UTILITIES, AND PAVING TO REMAIN. AREAS DAMAGED DURING CONSTRUCTION TO BE REPAIRED TO CITY OF WINNIPEG STANDARDS AT CONTRACTOR'S COST.
- REFER ALSO TO WRITTEN SPECIFICATIONS.
- EXISTING FENCE MESH AT WADING POOL TO BE REMOVED AS REQUIRED FOR INSTALLATION OF CONCRETE SIDEWALK PAVING. MESH TO BE STOCKPILED FOR REINSTALLATION.
- INSTALLATION OF NEW CHAIN LINK FENCE AS PER CW 3550 AND WRITTEN SPECIFICATION.
- PROPOSED PEDESTRIAN LIGHTS TO BE 1.0m FROM EDGE OF PATHWAY, SIDEWALK, OR SHRUB BED.
- CONTRACTOR TO SUPPLY AND INSTALL NEW SOD COMPLETE WITH CLEAN EARTH FILL AND TOPSOIL AS REQUIRED TO ENSURE PROPER DRAINAGE (REFER TO GRADING PLAN) FOR ALL AREAS NOT DESIGNATED FOR PAVING, LIMESTONE WALKWAY, PLAYGROUND, PLANTING BED, OR BUILDING
- FOR 3m HT. CHAIN LINK FENCE BEHIND SOCCER GOALS, CONTRACTOR TO SUPPLY AND INSTALL NEW POSTS AND RE-USE MESH FROM EXISTING 3m HT. CHAIN LINK FENCE.

LEGEND

- X — NEW 3m HT. FENCE TO BE INSTALLED
- x — NEW 1.2m HT. FENCE TO BE INSTALLED
- - - - - CHAIN LINK FENCE MESH TO BE REINSTALLED REFER TO NOTE 9.
- x — EXISTING 3m HT. FENCE TO REMAIN
- x — EXISTING 1.2m HT. FENCE TO REMAIN.
- — — — — PROPERTY LINE
- - - - - EXISTING CURB
- — — — — EXISTING SIDEWALK
- — — — — PROPOSED SNAP EDGE ON PATHWAY
- — — — — EXISTING WASTE WATER SEWER
- — — — — HYDRO
- — — — — EXISTING WATER MAIN
- — — — — EXISTING LDS
- — — — — EXISTING GAS LINE
- — — — — PROPOSED WATER MAIN
- — — — — PROPOSED LDS
- — EXISTING TREE
- — PROPOSED SHRUB BED
- — PROPOSED PLANTING BED WITH WOODCHIP MULCH
- — DETAIL #
- — SHEET #
- — PROPOSED PEDESTRIAN LIGHT