

# **PART E**

# **SPECIFICATIONS**

## PART E - SPECIFICATIONS

### GENERAL

#### E1. GENERAL

E1.1 These Specifications shall apply to the Work.

#### E2. GOODS

E2.1 The Contractor shall supply hand protection in accordance with the requirements hereinafter specified.

E2.2 Lined Roper Style Leather Gloves shall be:

- (a) Made of cowhide leather, 2 ½ to 3 oz. chrome tanned, cream in color;
- (b) Construction shall be:
  - (i) sewn with 100% polyester or a poly/cotton blend thread;
  - (ii) clute cut inseam sewn with reinforced set in roper thumb;
  - (iii) gore tab and dome at wrist;
  - (iv) cotton fleece lining (**acrylic lining will not be accepted**) securely tacked in all finger tips (thumb optional)
  - (v) **size: x-small, small, medium, large, X- large and XX-large;**

E2.3 Unlined Roper Styles shall be:

- (a) Made of cowhide leather, 2 ½ to 3 oz. chrome tanned, cream in color;
- (b) Construction shall be:
  - (i) sewn with 100% polyester or a poly/cotton blend thread;
  - (ii) clute cut inseam sewn with reinforced set in roper thumb;
  - (iii) gore tab and dome at wrist;
  - (iv) **size: x-small, small medium, large, X-large and XX-large;**

E2.4 Leather Mitts shall be:

- (a) Made of cowhide leather, 3 ½ to 4 oz. chrome tanned, cream in color;
- (b) Construction shall be:
  - (i) sewn with 100% polyester or a poly/cotton blend thread;
  - (ii) pullover style;
  - (iii) elastic back/open wrist;
  - (iv) fully welted chopper thumb bound top;
  - (v) fully welted mitt;
  - (vi) **size; x-small, small, medium, large, X-large and XX-large.**

E2.5 Mitt Liners

- (a) Made of 2 ply 100%Wool (**acrylic fabric will not be accepted**)
  - (i) pullover style;
  - (ii) knitted mitt
  - (iii) one size fits all.

E2.6 Cotton Canvas Work Gloves

- (a) **100%** cotton canvas gloves, cream in color;
  - (i) one size fits all.

**E2.7 Leather/Cotton Work Gloves**


- (a) Construction shall be:
  - (i) Cowhide or pigskin leather on the palm, fingers and finger tips;
  - (ii) Sewn with 100% polyester or a poly/cotton blend thread;
  - (iii) Knuckle protector;
  - (iv) Striped canvas back with minimum two inch (2") starched canvas safety cuff;
  - (v) Elastic sewn on inside of back;
  - (vi) Cotton fleece lining on palm (fingers will also be acceptable) secured in glove **(acrylic fabric will not be accepted)**;
  - (vii) Size: large

**E2.8 Ansell Edmont Grab-It Gloves**

- (a) Palm coated knitwrist
  - (i) Rubber coated flock finish
  - (ii) Natural Colour
  - (iii) Size: large

**E3. GLOVE SIZING**

- (a) Glove Sizing, should be used as a tool to measure sizing of gloves required for the City of Winnipeg.

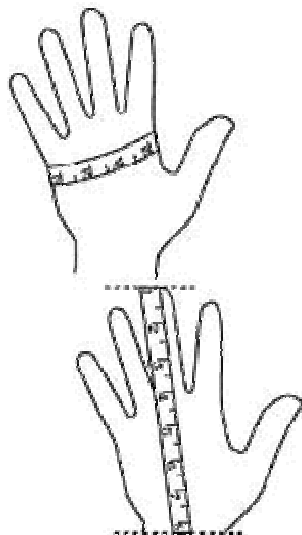

**GLOVE SIZING:**

Measure around the hand at the fullest part (exclude thumb)

- Next, measure from the tip of the middle finger to the base of the hand
- Use the **LARGEST** of these two measurements for the correct size glove
- If you are **RIGHT** handed, take measurements from your **RIGHT** hand
- If you are **LEFT** handed, take measurements from your **LEFT** hand
- The number of inches measured equals the size of the glove (example: A 7" measurement equals a size 7 glove)

If Hand Measures:	Ladies' Sizes	Men's Sizes	Metric Sizes
6" to 7"	6 (S)	7 (XS)	18
7" to 8"	7 (M)	8 (S)	20
8" to 9"	8 (L)	9 (M)	23
9" to 10"	9 (XL)	10 (L)	25

<b>10" to 11"</b>	-----	<b>11 (XL)</b>	<b>28</b>
<b>11" to 12"</b>	-----	<b>12 (XXL)</b>	<b>30</b>

**E4. DELIVERY**

E4.1 Goods shall be delivered on an "as-required" basis during the term of the Contract, f.o.b. destination, freight prepaid, to various locations within the City.

E4.1.1 Goods shall be delivered within five (5) Business Days of the placing of an order.

E4.2 Goods shall be delivered between 8:30 a.m. and 2:00 p.m. on Business Days.

E4.3 The Contractor shall off-load goods as directed at the delivery location.