

NOTES:


MAIN FLOOR FRAMING PLAN NOTES:

- 1 TYPICAL NEW MAIN FLOOR SLAB: SLOPED CONCRETE TOPPING REINFORCED WITH 6x6xW2.9W2.9 WELDED WIRE FABRIC ON 1 1/2" 22 GAUGE GALVANIZED COMPOSITE FLOOR DECK.
- 2 EXISTING MAIN FLOOR BEAMS TO BE DEMOLISHED AS PER PHASING PLAN - FOR REFERENCE ONLY.
- 3 EXISTING MAIN FLOOR BEAM TO REMAIN.
- 4 POCKET AND GROUT NEW BEAM 6" INTO EXISTING MASONRY WALL.
- 5 SLOPE NEW FLOOR SLAB TO NEW FLOOR DRAIN LOCATIONS - SEE MECHANICAL DRAWINGS FOR MORE DETAIL.
- 6 NEW 5' CONCRETE CURB - SEE DETAIL ON DRAWING S3

NOTE:
TYPICAL WHERE NOTED C-1: 5x5x1/4" HSS COLUMN

1 MAIN FLOOR FRAMING PLAN
SCALE: 1/4"=1'-0"

No.	REVISION/DESCRIPTION	BY	DATE

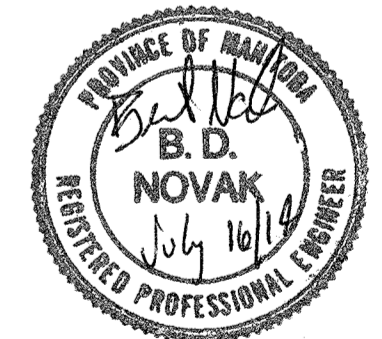

DRAWN	CHECKED	DESIGNED	APPROVED
JAW/RCP			
DATE	USER		
2014.07.14			

THE CITY OF WINNIPEG
PLANNING, PROPERTY AND
DEVELOPMENT DEPARTMENT
MUNICIPAL ACCOMMODATIONS DIVISION
3-65 GARRY STREET, R3C 4K4

PROJECT
AMBULANCE STATION # 3
STRUCTURAL & OCCUPANCY UPGRADES
DESIGN OF STRUCTURAL UPGRADES
598 ST. MARY'S ROAD

SHEET TITLE
MAIN FLOOR FRAMING PLAN

SCALE	PROJECT No:	SHEET No:
AS SHOWN	2013-047	S2