
TITLE

POST & CHAIN FENCING

SCD-105A

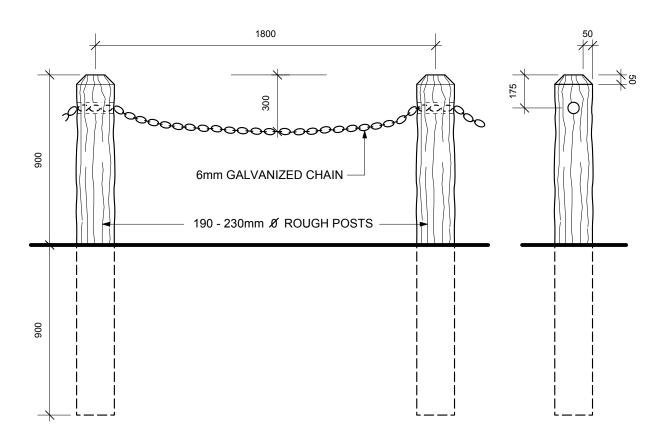

NOTE:

- WESTERN RED CEDAR, FREE OF BARK, SOLID CORE, AIR DRIED, PENTACHLOROPHENOL DIPPED AFTER SHAPING & DRILLING, OR MANITOBA PINE, FREE OF BARK, SOLID CORE, ROUGH NOT TURNED & BOLIDEN TREATED UNDER PRESSURE.
- SECURE CHAIN TO EACH POST WITH TWO ONLY 90mm GALV. NAILS TO PREVENT CHAIN SLIPPING. DRAPE CHAIN AS INDICATED.
- ALL POSTS THOROUGHLY TAMPED AND EARTH MOUNDED APPROX. 100mm AT EACH POST FOR FUTURE SETTLING. SURPLUS EARTH TO BE LEGALLY DISPOSED OF.
- FENCE POSTS ARE TO FOLLOW THE NATURAL CONTOUR OF THE LAND EXCEPT FOR SMALL UNDULATIONS WHICH WOULD TEND TO REDUCE THE AESTHETIC APPEARANCE OF THE FINISHED PRODUCT.

NOTE:

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

DRAWN BY: ST DATE: JUNE/03 NOT TO SCALE THE CITY OF WINNIPEG
Planning, Property and Development Department
Planning and Land Use Division
Unit 15 - 10 Fort Street, Winnipeg, MB, R3C 4X5

