

Tranquility Park
 Play Curb Details





Drawing Title:
Double Timber Edging with Cap
SCD-651A

Base course timber:
 - Base course timbers shall be pinned with a minimum of two (2) 19mm dia. by 900mm rebar at maximum 1200mm o.c.
 - All rows of timber above base course shall be securely spiked with a minimum of two (2) x 12mm dia. by 250mm spikes at maximum 1200mm o.c.
 - Preservative must be applied to all end cuts.

Cap:
 - shall be pre-drilled and screwed down using screws treated for ACQ use and sized to suit. Screws to extend into timber base at min. 50mm and to be countersunk into cap. Two parallel screws every 600mm O.C. along length and at ends. Only use butt joints for straight sections of pedra. Min. length of timbers to be 1200mm. Install longest lengths possible.

25 x 140mm (1"-5/4" x 6") Pedra or Composite Cap. (actual size of composite board must be equal or wider than board below) Joints to be lapped with Timber below. Grain of Wood Curved Down as Shown.

140 x 140mm (6" x 6") Pressure Treated Timber. **Joints to be butt joints. Joints in straight runs are to be lapped over timber below by a minimum of 600mm.**

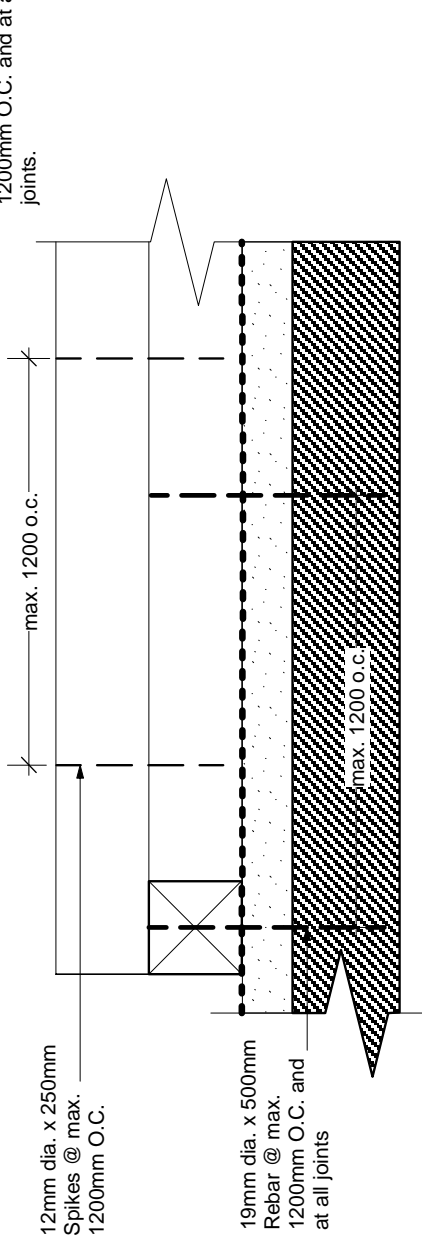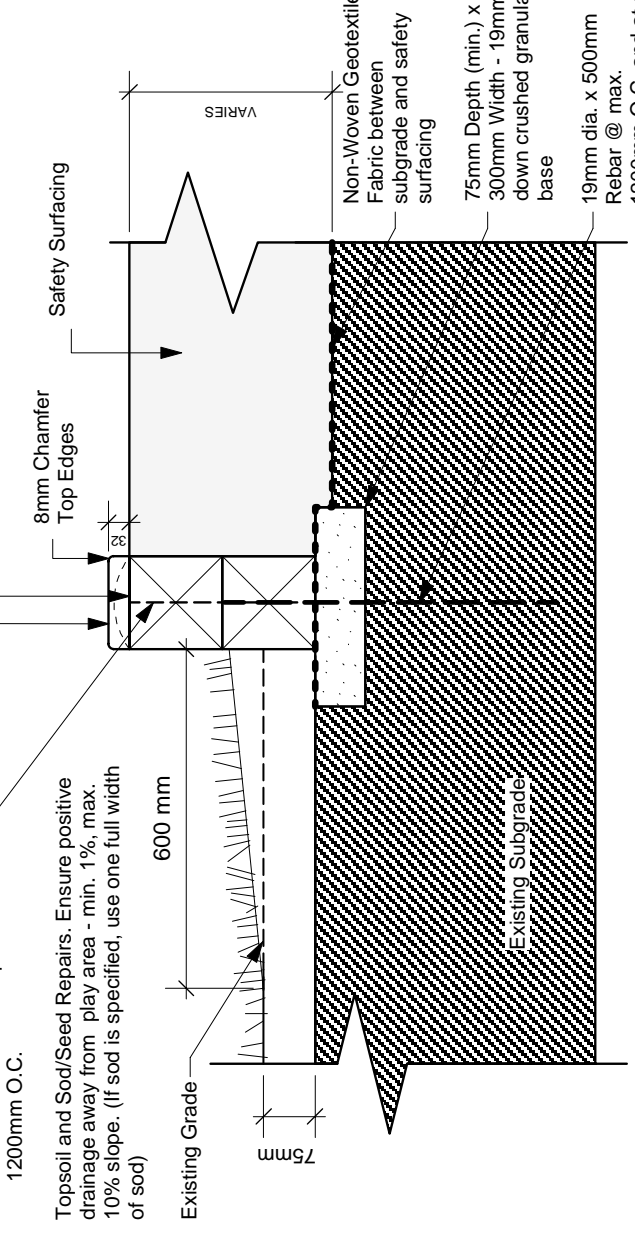

DIMENSIONS SHOWN ARE IN MILLIMETRES UNLESS OTHERWISE SPECIFIED

The City of Winnipeg
 Planning, Property and Development Department
 Planning and Land Use Division
 Unit 15 - 30 Fort Street, Winnipeg, MB, R3C 4X5

REVISION: 1
 DATE: January 12, 2012
 SCALE: NTS
 DRAWN BY: SP

Drawing Title:
Single Timber Edging With Cap
SCD-651

Topsoil and Sod/Seed Repairs. Ensure positive drainage away from play area - min. 1%, max. 10% slope. (If sod is specified, use one full width of sod)


600 mm

75mm

8mm Chamfer Top Edges

140 x 140mm (6" x 6") Pressure Treated Timbers Base Course. **End Joints in timber between co-linear pieces of timber to be 1/2 lap c.w. 60 cm overlap and rebar pin.**

25 x 140mm (1"-5/4" x 6") Pedra or Composite Cap Set with Grain of Wood Curved Down as Shown. (Actual size of composite board must be equal or wider than board below). Joints to be lapped with Timber below. Grain of Wood Curved down as Shown.

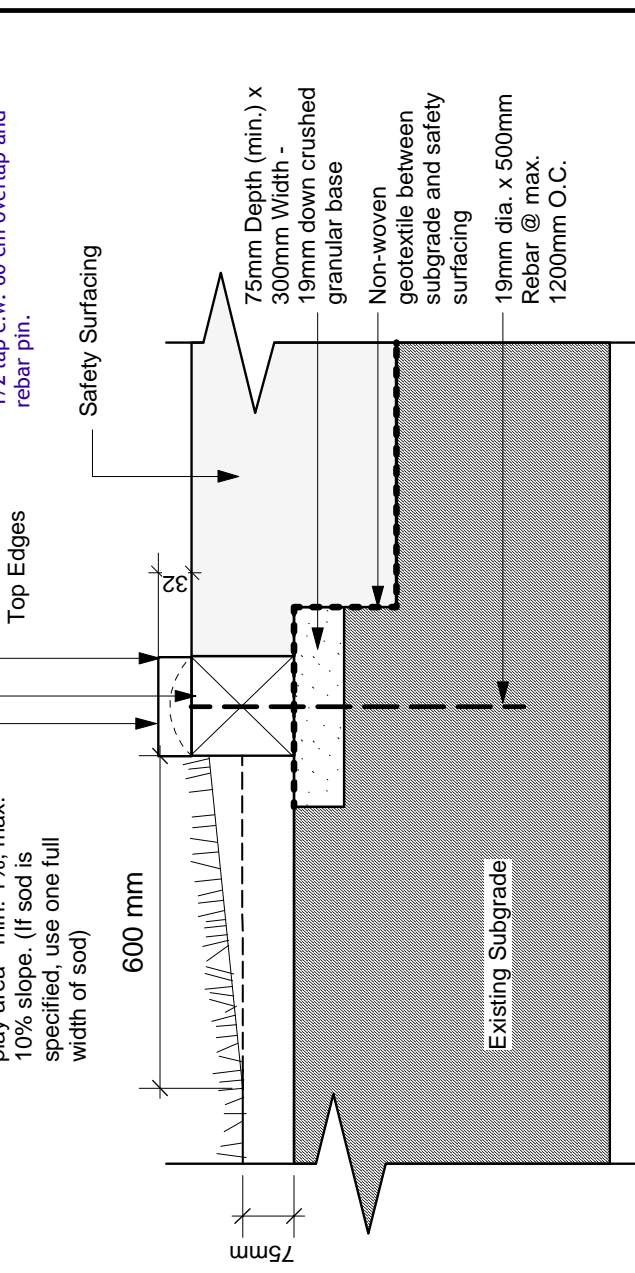

Base course timber:
 - shall be pinned with minimum of two (2) 19mm dia. rebar @ max. 1200mm O.C.

Cap:
 - shall be pre-drilled and screwed down using screws treated for ACQ use and sized to suit. Screws to extend into timber base at min. 50mm and to be countersunk into cap. Two parallel screws every 600mm O.C. along length and at ends. Only use butt joints for straight sections of pedra. Min. length of timbers to be 1200mm. Install longest lengths possible.

DIMENSIONS SHOWN ARE IN MILLIMETRES UNLESS OTHERWISE SPECIFIED

The City of Winnipeg
 Planning, Property and Development Department
 Planning and Land Use Division
 Unit 15 - 30 Fort Street, Winnipeg, MB, R3C 4X5

REVISION: 1
 DATE: January 12, 2012
 SCALE: NTS
 DRAWN BY: SP