



3
2/4 CONSTRUCTION DETAILS OF PATH (UPPER SECTION)

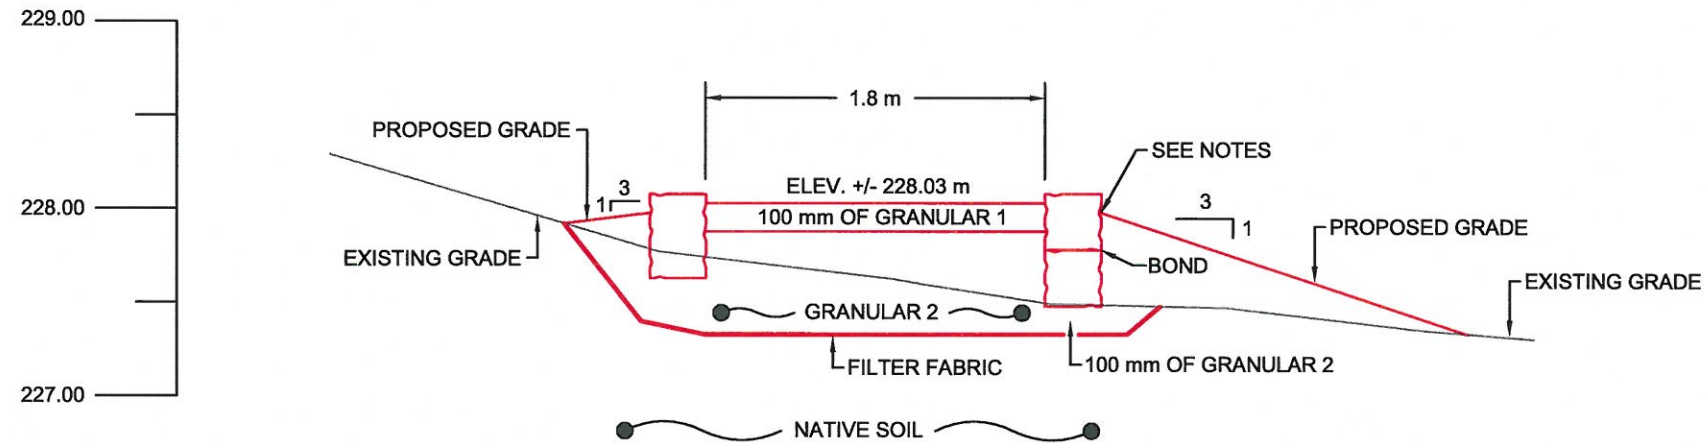


4
2/4 CONSTRUCTION DETAILS OF PATH (LOWER SECTION)

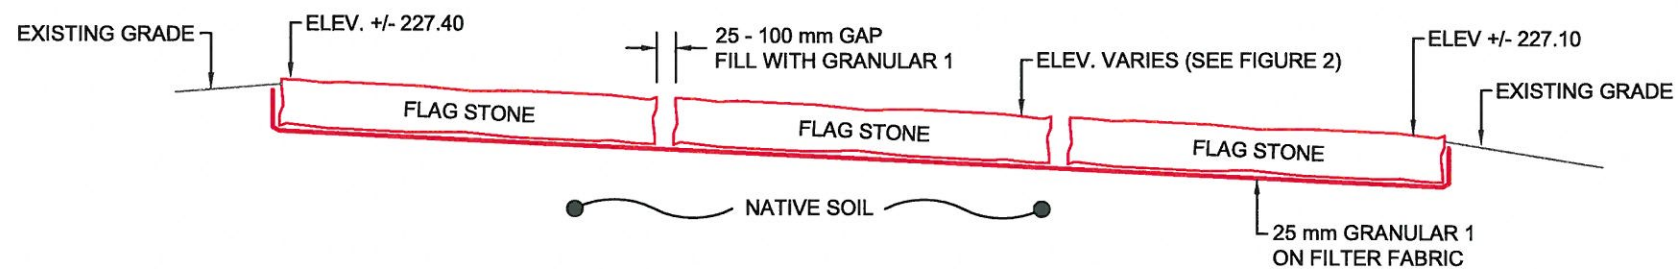

5
2/4 CROSS-SECTION OF FLAG STONE

LEGEND

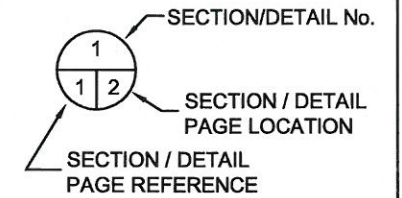


NOTES

- WALKWAY EDGE ROCKS TO BE 300 mm WIDE AND 300 TO 600 mm HIGH. MINIMUM BLOCK SIZE = 50 kg. MINIMUM BURIAL = 150 mm +/- 37.3 m LENGTH OF STONE REQUIRED
50 TO 100 mm COVER INSIDE PATH BLOCK LIP
100 TO 150 mm COVER OUTSIDE PATH BLOCK LIP
- GRANULAR 1 IS 6 TO 12 mm DIA. LIMESTONE DOWN. FINES SHALL NOT EXCEED 20% PASSING THE 0.08 mm SIEVE. COMPACT TO 100% MAXIMUM DRY DENSITY (M.D.D).
- GRANULAR 2 IS 20 mm DIA. CRUSHED LIMESTONE BASE COARSE COMPACT TO +/- 100% M.D.D. AS POSSIBLE.
- BLOCKS TO BE BONDED TOGETHER WITH Snap Edge PL LANDSCAPE BLOCK ADHESIVE OR EQUIVALENT, EXCEPT UNDER COLD WEATHER CONDITIONS WHERE ALL STONES ARE TO BE BONDED USING SIKA ANCHORFIX-2ca COLD WEATHER EPOXY ANCHORING GEL (MAX. -26 °C)
- FILTER FABRIC TO BE GEOTEXTILE NW-801 OR EQUIVALENT

NO.	DATE	ISSUE / REVISION
0	Sept. 2015	tender/ construction

ENG-TECH CONSULTING LIMITED
 6 - 854 Marion Street
 Winnipeg, MB R2J 0K4
 Phone: (204) 233-1694
 Fax: (204) 235-1579



CLIENT: CITY OF WINNIPEG
 PROJECT: ANNABELLA WALKWAY PROJECT - ANNABELLA STREET, WINNIPEG, MB

DWG DESCRIPTION: CONSTRUCTION DETAILS

SCALE: 1:40

DRAWN BY: ALH DATE: SEPTEMBER 2015

FILE No.: 14-217-05 CLIENT DWG/FIG. No.:

ENG-TECH DWG/FIG. No.: 4 NO.: