

- REFERENCE NOTES**
- PAVEMENT DIMENSIONS ARE TO BACK OF CURB
 - BASELINE IS CENTRE LINE RIGHT-OF-WAY
 - PROPERTY LINES OBTAINED FROM CITY OF WINNIPEG L.B.I.S., AND NO SCALE FACTOR WAS APPLIED
 - REFER TO AECOM FIELD BOOK NO. 4915

- CONSTRUCTION NOTES**
- PLACE NEW ASPHALTIC PAVEMENT TYPE 1A (AVG. THICKNESS 85mm)
 - REMOVE EXISTING ASPHALT AND CONSTRUCT NEW ASPHALTIC OVERLAY TYPE 1A
 - REMOVE EXISTING CONCRETE PAVEMENT AND CONSTRUCT NEW 150mm REINFORCED CONCRETE PAVEMENT c/w 85mm ASPHALT OVERLAY
 - REMOVE EXISTING LIP CURB AND CONSTRUCT NEW CONCRETE BARRIER CURB (180mm HT. SEPARATE)
 - REMOVE EXISTING BARRIER CURB AND CONSTRUCT NEW CONCRETE MODIFIED BARRIER CURB (100mm REVEAL HT. DOWELLED)
 - CONSTRUCT CURB RAMP (10mm HT. INTEGRAL)
 - RENEW EXISTING 100mm CONCRETE SIDEWALK
 - REMOVE EXISTING CATCHPIT
 - INSTALL NEW MOUNTABLE CURB AND GUTTER INLET c/w CATCHPIT (SD-023) AND CONNECT NEW LEAD TO EXISTING CATCHBASIN
 - ADJUST EXISTING WATER VALVE TO GRADE
 - ADJUST EXISTING MANHOLE/CATCHBASIN TO GRADE
 - REMOVE EXISTING FRAME AND INSTALL NEW FRAME AND SOLID COVER
 - INSTALL NEW CAST IRON RISER RING



METRIC
WHOLE NUMBERS INDICATE MILLIMETRES
DECIMALIZED NUMBERS INDICATE METRES

EXISTING	LEGEND - PLAN	PROPOSED	EXISTING	LEGEND - PLAN	PROPOSED	EXISTING	LEGEND - PROFILE	PROPOSED
150 mm W.M.	WATERMAIN	150 mm W.M.	HYDRO	— x —	C PROFILE	— x —	N/W GUTTER	— x —
300mm L.D.S.	LAND DRAINAGE SEWER	300mm L.D.S.	CONCRETE	—	ASPHALT	—	S/E GUTTER	—
250mm W.W.S.	WASTEWATER SEWER	250mm W.W.S.	PROPERTY LINE	—	SURVEY BAR	—	N/W PROPERTY LINE	—
○	MANHOLE	●	ELEVATION	(35.750)	TREE	—	S/E PROPERTY LINE	—
□	CATCH BASIN	■	SIDEWALK RAMP	—	CONCRETE SIDEWALK	—		
▽	CATCH PIT	▼	FENCE	—				
—	JUNCTIONS	—						
—	CULVERT	—						
—	GAS	—						


LOCATION APPROVED UNDERGROUND STRUCTURES

SUPV. U/G STRUCTURES COMMITTEE DATE

NOTE:
LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE. BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.

B.M. 55 - 010 SW corner Cottonwood Rd & Westmount Dr. Tbit in front of Windsor Park Baptist Church. 1.5m E of production W wall, 0.8m below brick of NW corr bldg

DESIGNED BY	JC/SS	CHECKED BY	BC/KWR
DRAWN BY	JC/SS	APPROVED BY	
HOR. SCALE:	1:250	RELEASED FOR CONSTRUCTION BY:	
VERTICAL:	1:10	DATE:	Apr 12/16

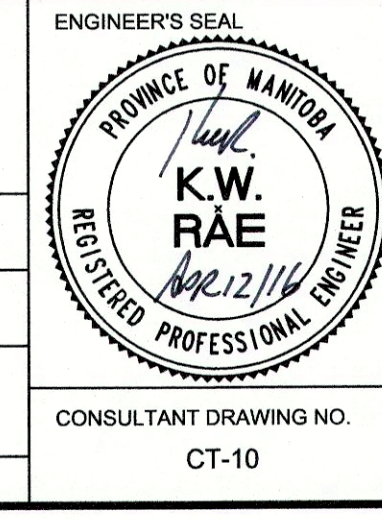

THE CITY OF WINNIPEG
PUBLIC WORKS DEPARTMENT
ENGINEERING DIVISION

2016 LOCAL STREET RENEWAL PROGRAM

DUSSAULT AVENUE - COTTONWOOD ROAD TO BIBEAU BAY S. LEG REHABILITATION STATION 0+100 TO STATION 0+200

CITY DRAWING NUMBER: SHEET 10 OF 11

