

NOTES:

THESE DRAWINGS SHALL NOT BE SCALED.

THE CONTRACTOR SHALL VISIT THE SITE AND SATISFY ONESELF ALL DIMENSIONS, DATUM, AND DETAILED INFORMATION SHOWN ARE CORRECT.

THE CONTRACTOR IS TO REVIEW AND COORDINATE ALL ARCHITECTURAL, MECHANICAL, ELECTRICAL AND STRUCTURAL DRAWINGS FOR ADDITIONAL OPENINGS THROUGH FLOORS, WALLS, AND CEILINGS FOR DUCT, PIPE & ELECTRICAL RISERS AND ALL OPENINGS NOT SHOWN ON DRAWINGS.

ALL OPENINGS THROUGH THE FIRE SEPARATIONS AS A RESULT OF THE WORK OF THIS CONTRACT ARE TO BE FIRE STOPPED AND SEALED WITH ULC APPROVED FIRE STOPPING TO MAINTAIN THE INTEGRITY OF THE FIRE SEPARATION, AND PROVIDE AND SMOKE-TIGHT BARRIER. EXISTING OPENINGS THROUGH FIRE SEPARATIONS THAT ARE NOT CURRENTLY

ALL PRODUCTS AND MATERIALS TO BE USED AND INSTALLED SHALL CONFORM WITH MANUFACTURER'S SPECIFICATIONS & APPLICABLE CODES.

FIRE STOPPED TO BE DEALT WITH UNDER SEPARATE CONTRACT.


THE CONTRACTOR SHALL BE RESPONSIBLE TO PATCH AND MAKE GOOD ALL EXISTING CONSTRUCTION AFFECTED BY THE REMOVAL OF ALL ITEMS FORMING THE PART OF THE RENOVATION WORK.

WHERE NEW FLOORING AND BASE IS TO BE INSTALLED IN EXISTING AREAS (REFER TO FLOOR PLAN AND ROOM SCHEDULE) THE EXISTING FLOORING SURFACE AND BASE MUST BE REMOVED, UNLESS OTHERWISE NOTED. ALL FLOOR SURFACES SHALL BE PREPARED IN ACCORDANCE TO MANUFACTURER'S RECOMMENDATIONS FOR INSTALLATION OF NEW

WHERE PAINTING OF EXISTING WALLS IS INDICATED ON THE ROOM SCHEDULE, THESE WALLS MUST BE CLEANED OF ANY EXISTING WALL COVERING, PATCHED & PREPARED TO ACCEPT NEW MATERIAL, UNLESS OTHERWISE NOTED.

WORK SEQUENCE - EXISTING BOILER B-3 REMOVAL:

- EXISTING BOILER B-3 SHALL REMAIN IN OPERATION UNTIL NEW BOILERS B-1, B-2 AND B-3 ARE COMMISSIONED.
- EXISTING BOILER B-3 AND REMAINDER OF EXISTING CHIMNEY CONTAINS ASBESTOS. ASBESTOS ABATEMENT WOULD BE CONDUCTED BY THE CITY UPON COMMISSIONING OF NEW BOILERS B-1, B-2, AND B-3. CONTRACTOR SHALL PROVIDE A THREE WEEK ADVANCED NOTICE OF THE FIRM COMMISSIONING COMPLETION DATE TO THE CONTRACT ADMINISTRATOR. ASBESTOS ABATEMENT WOULD TAKE 2 WEEKS TO COMPLETE.
- 3. IMMEDIATELY UPON COMPLETION OF ABATEMENT, REMOVE EXISTING BOILER CHIMNEY AND INSTALL THE 2nd CHIMNEY AND COMMISSION NEW BOILERS B-4, B-5
- 4. DECOMMISSION AND REMOVE EXISTING BOILER B-3.
- 5. REMOVAL OF THE EXISTING BOILER, CHIMNEY, AND INSTALLATION OF NEW CHIMNEY SHALL BE DONE AFTER NORMAL OPERATING HOURS OF THE POOL.

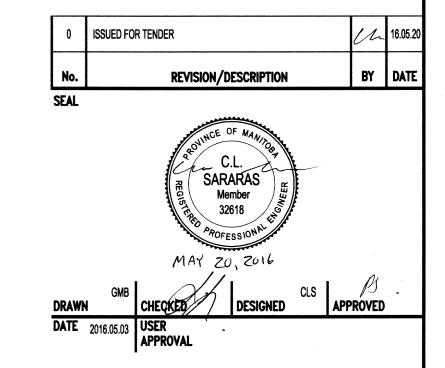

DEVELOPMENT DEPARTMENT
MUNICIPAL ACCOMMODATIONS DIVISION **PROJECT**

3-65 GARRY STREET, R3C 4K4

THE CITY OF WINNIPEG

PAN AM POOL REPLACEMENT OF BOILERS

25 POSEIDON BAY

SHEET TITLE ELECTRICAL

ELECTRICAL ROOM PLAN

NEW SCALE

KGS GROUP

CONSULTING ENGINEERS

16-0107-008 AS SHOWN

DRAWING SHEET SIZE: A1 (841mm x 594mm) PLOT 1:1