

**MAIN FLOOR PLAN**


0 1000 2000 3000 mm SCALE 1:100

- NOTES :
1. LIGHTING FIXTURES TO REMAIN. RELOCATE AND RECONNECT EXISTING FIXTURES TO ALLOW CONSTRUCTION OF NEW WALLS. REPLACE EXISTING T12 BALLASTS WITH MANITOBA HYDRO POWER SMART APPROVED T8 BALLASTS AND ALL REQUIRED ASSOCIATED COMPONENTS. PROVIDE LABEL ON INSIDE OF LUMINAIRE INDICATING T8 LAMP ONLY.
  2. DUPLEX RECEPTACLES AND COMMUNICATIONS JACKS ON EXTERIOR WALLS TO REMAIN EXCEPT AS NOTED. DEVICES ON WALLS TO BE DEMOLISHED SHALL BE REMOVED INCLUDING WIRING BACK TO SOURCE OF SUPPLY (PANELBOARD / TELECOMMUNICATIONS ROOM).
  3. REFER TO ARCHITECTURAL DRAWINGS FOR DEMOLITION/MODIFICATION OF WALLS AND CEILING.




E	ISSUED FOR ADDENDUM No.1	SCK	07/11/14
D	ISSUED FOR TENDER	SCK	07/11/09
C	ISSUED FOR FINAL REVIEW	SCK	07/09/09
B	ISSUED FOR 100% REVIEW	SCK	07/09/07
A	ISSUED FOR CLIENT REVIEW	QL	07/09/07
NO.	REVISION/DESCRIPTION	BY	DATE

SEALS

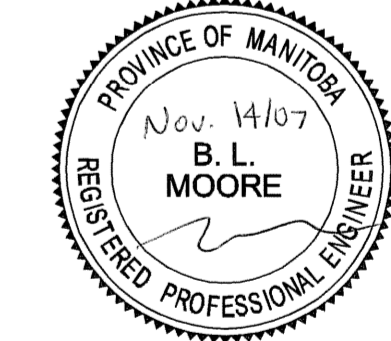


DRAWN BY SCK CHECKED BY - APPROVED -  
 DATE 2007.05.06 USER APPROVAL

**CITY OF WINNIPEG**  
 PLANNING, PROPERTY &  
 DEVELOPMENT DEPARTMENT  
 CIVIC ACCOMMODATIONS DIVISION  
 300 - 65 GARRY ST. R3C 4K4

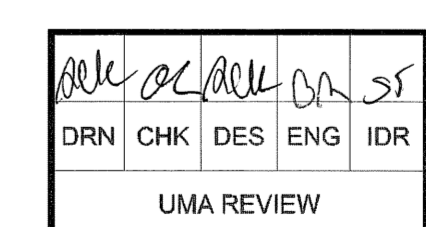

PROJECT  
**CONSTRUCTION OF OFFICE/GARAGE  
 RENOVATIONS & STORAGE BUILDING  
 AT 1539 WAVERLEY STREET**  
 1539 Waverley Street, Winnipeg, MB.

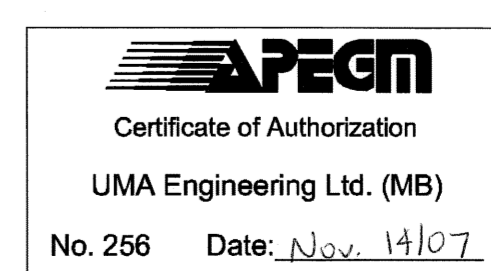

SHEET TITLE  
**ELECTRICAL  
 OFFICE MAIN AND SECOND FLOOR  
 DEMOLITION**

SCALE 1:500	PROJECT NO. 0265-395-02	SHEET NO. <b>OFF-E-1.1</b>
----------------	----------------------------	-------------------------------