

PLAN
 0 500 1000 1500 mm SCALE 1:50
 MAIN FLOOR PLAN NEW CONSTRUCTION

- NOTES :
- 1 PROVIDE WALL FIN ENCLOSURE SECTION TO MATCH EXISTING. CONNECT THE EXISTING SECTIONS OF WALL FIN PIPING. CONFIRM PIPE SIZE ON SITE.
 - 2 REINSTALL EXISTING FORCE FLOW UNIT. REPIPE TO MAINS IN CEILING. PROVIDE NEW THERMOSTAT SUITABLE FOR CONTROL SYSTEM.
 - 3 PROVIDE NEW THERMOSTATS SUITABLE FOR THE CONTROL SYSTEM. CONNECT TO END DEVICES AS INDICATED.
 - 4 NEW 19mm HWS RISER FROM EXISTING WALL FIN UP TO MAIN LOCATED IN CEILING SPACE.
 - 5 NEW 19mm HWS/HWR RISER FROM RELOCATED FAN COIL UP TO HWS/HWR MAINS IN CEILING.
 - 6 TRANSITION FROM EXISTING 500x300 S/A DUCT DOWN TO THE NEW 350x150 S/A DUCT.
 - 7 EXTEND S/A MAIN 900mm BEYOND CENTER LINE OF BRANCH TAKE-OFF.




D	ISSUED FOR TENDER	ALS	07/11/02
C	ISSUED FOR FINAL REVIEW	ALS	07/16/02
B	ISSUED FOR 100% REVIEW	ALS	07/26/02
A	ISSUED FOR CLIENT REVIEW	ALS	07/26/02
NO.	REVISION/DESCRIPTION	BY	DATE




DRAWN BY	RJP	CHECKED BY	-	APPROVED	-
DATE	2007.06.09	USER APPROVAL			

CITY OF WINNIPEG
 PLANNING, PROPERTY &
 DEVELOPMENT DEPARTMENT
 CIVIC ACCOMMODATIONS DIVISION
 300 - 65 GARRY ST. R3C 4K4

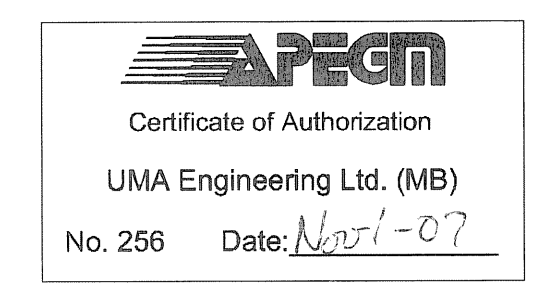

ISSUED FOR
TENDER
 Date: 2007/11/02

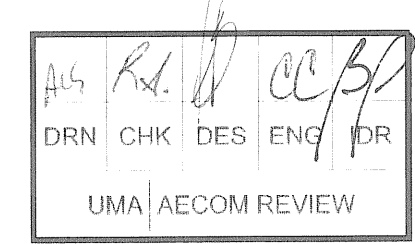

PROJECT
**CONSTRUCTION OF OFFICE/GARAGE
 RENOVATIONS AND STORAGE BUILDING
 AT 1539 WAVERLEY STREET**
 1539 Waverley Street, Winnipeg, MB.

SHEET TITLE
**MECHANICAL
 NEW CONSTRUCTION - HVAC
 MAIN FLOOR OFFICE**

SCALE	PROJECT NO.	SHEET NO.
AS NOTED	0265-395-02	OFF - M2.1