
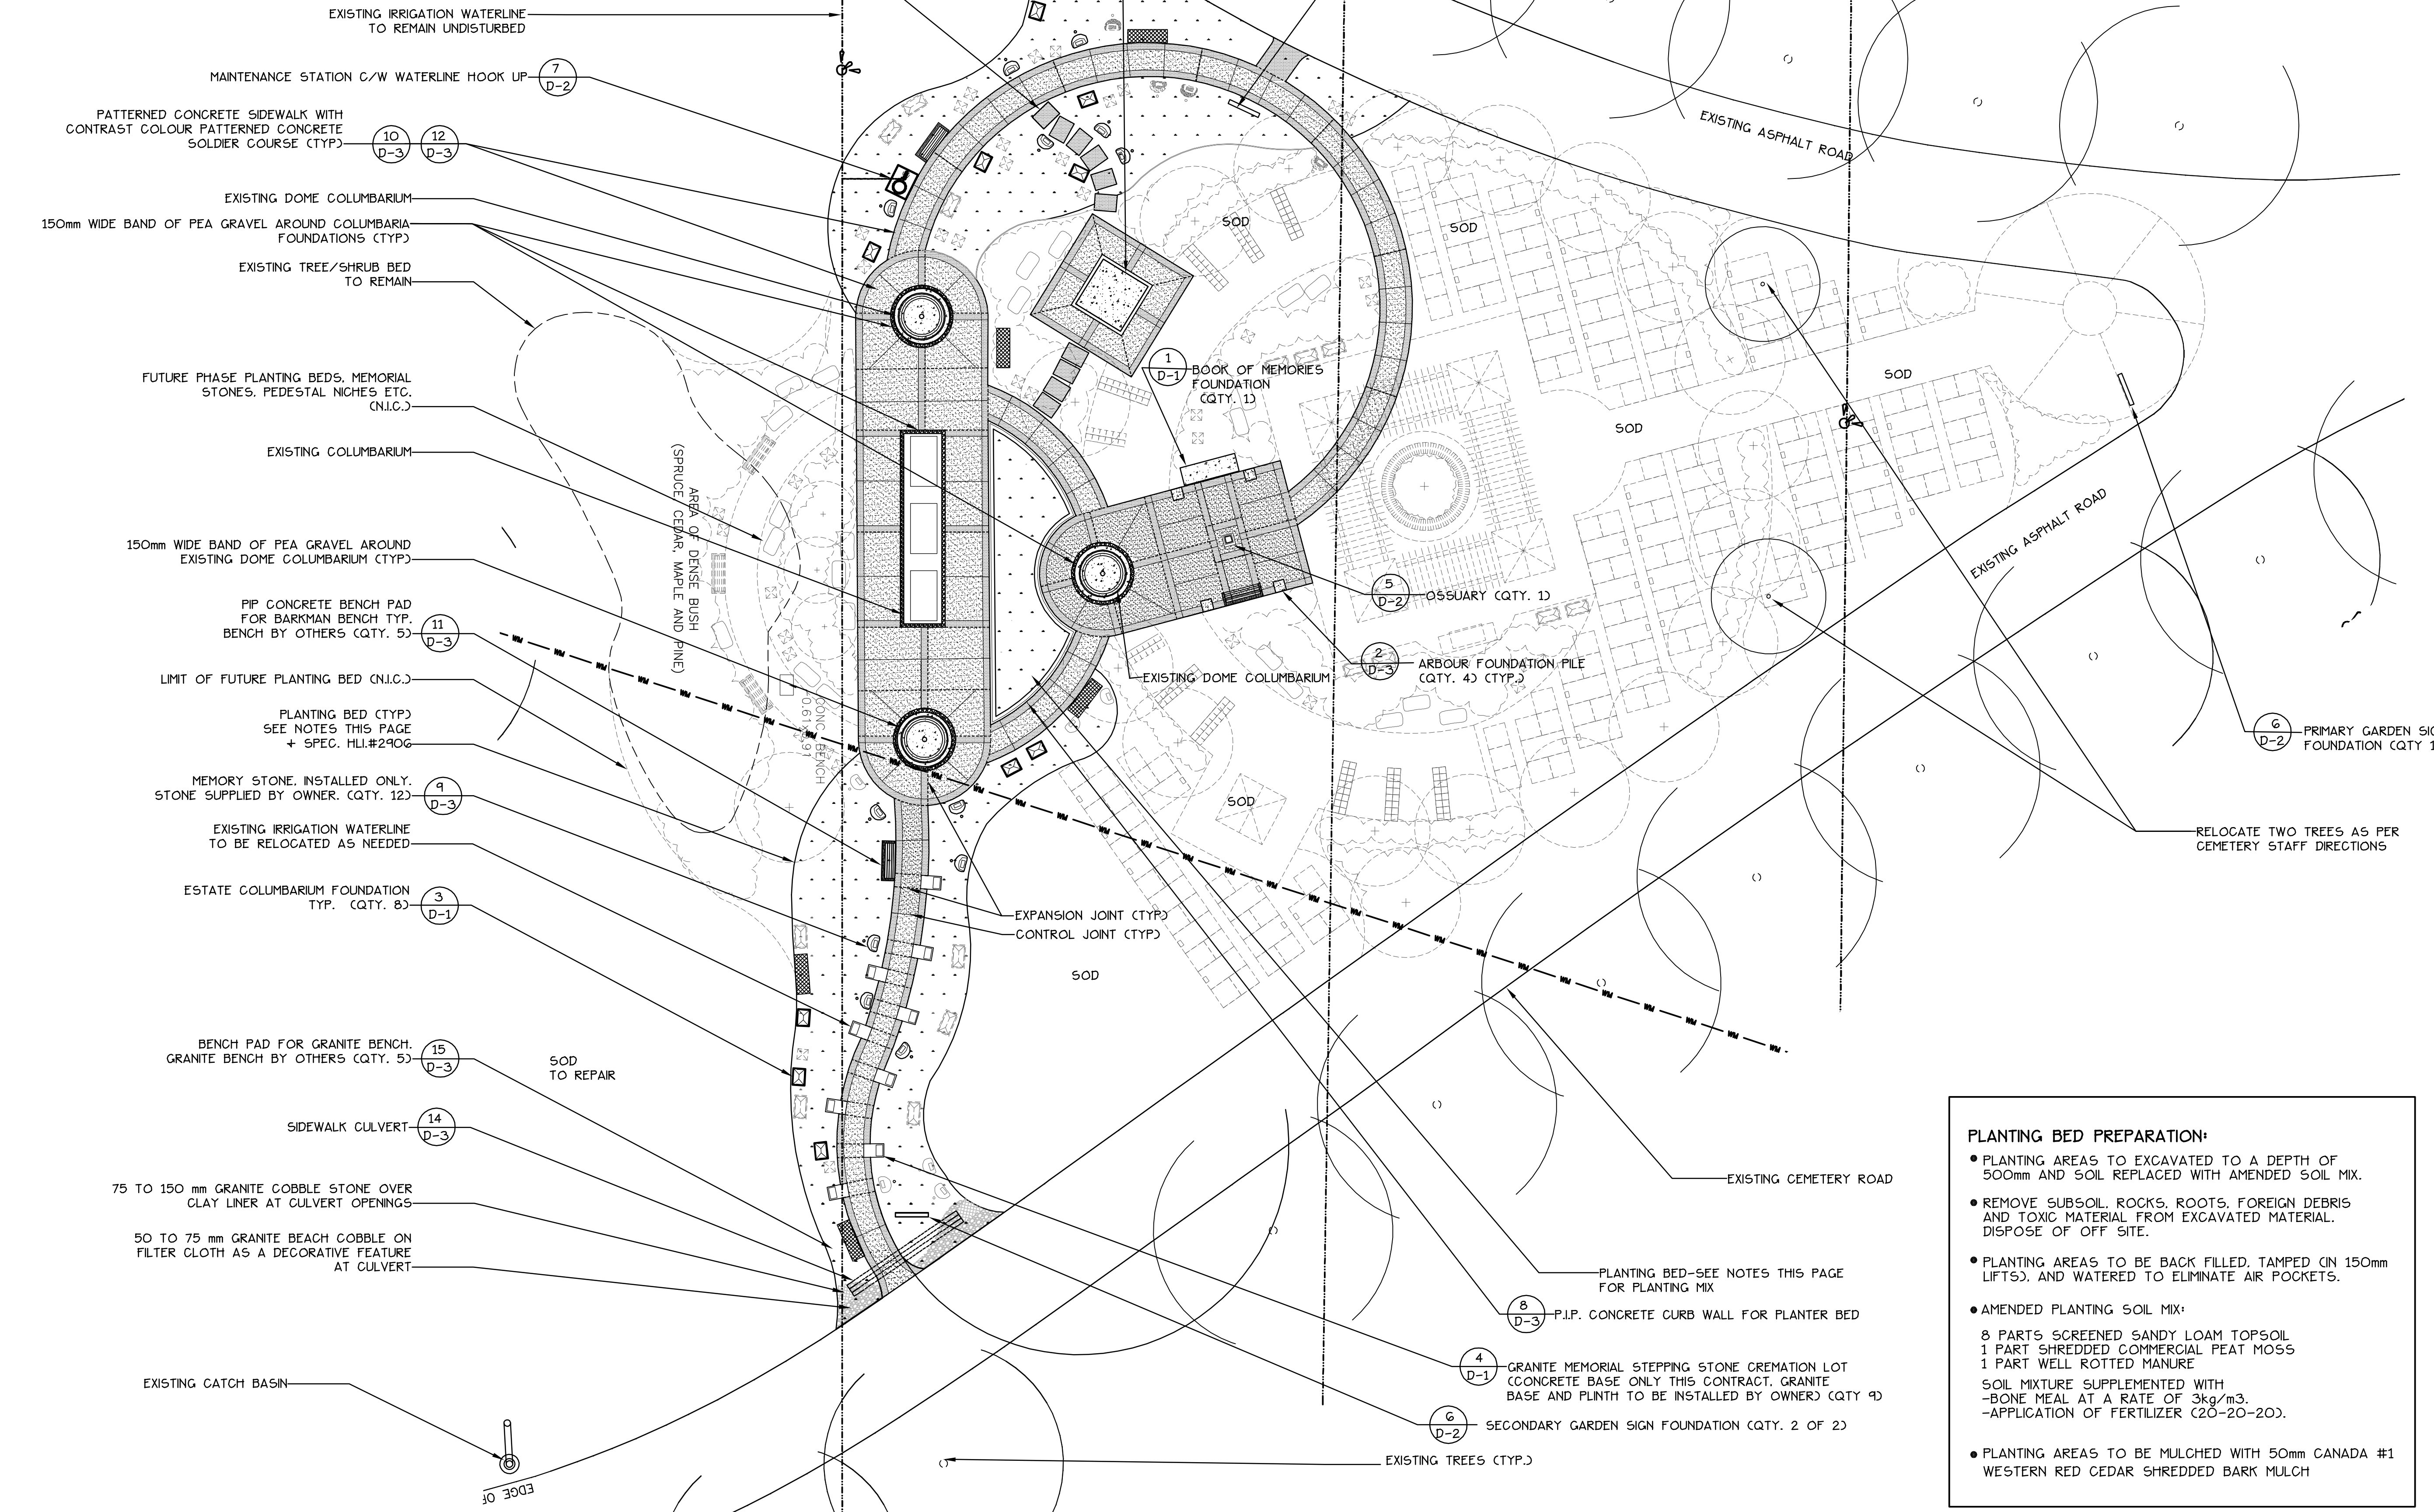


KEY MAP: ST VITAL CEMETERY CREMATION GARDEN

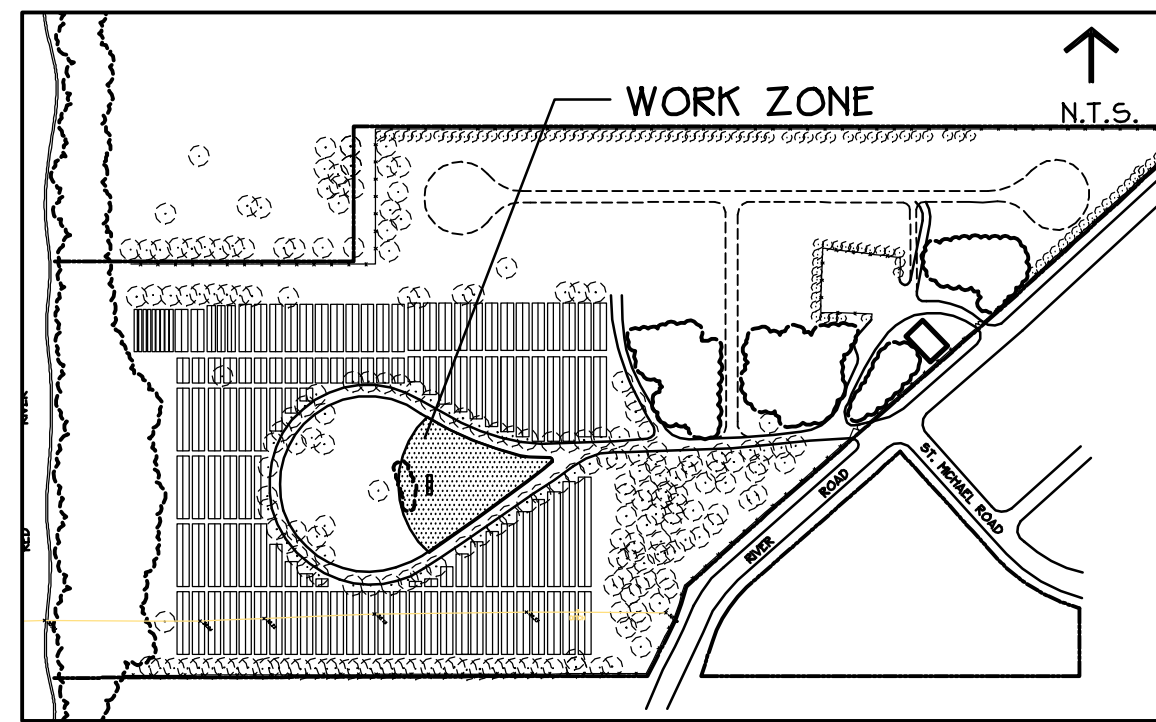

NOTES + LEGEND

- - - WATERMAN
- IRRIGATION WATERLINES
- ⊙ MANHOLE
- ⊙ SPRINKLER
- ⊙ WATER VALVE
- [Pattern] P.I.P. PATTERNED CONCRETE SIDEWALK BANDING/SOLDIER COURSE- COLOUR 'A'
- [Pattern] P.I.P. PATTERNED CONCRETE SIDEWALK INFILL PATTERN-COLOUR 'B'
- [Pattern] PLANTING BEDS (BED PREPARATION ONLY THIS CONTRACT- PLANT MATERIALS BY OWNER N.I.C.)
- [Symbol] DENOTES FUTURE PHASE WORKS (FOR REFERENCE ONLY)-NOT IN CONTRACT
- DENOTES CONCRETE PAVING EXPANSION JOINT
- DENOTES CONCRETE PAVING CONTROL JOINT
- [Pattern] P.I.P. CONCRETE BENCH PAD FOR BARKMAN BENCH (QTY. 2)
- [Pattern] BENCH PAD FOR GRANITE BENCH (QTY. 5)

06			
05			
04			
03			
02	01/20/08	REVISED FOR TENDER	AH
01	09/20/08	REVISED FOR CLIENT REVIEW	AH


No.	DATE	DESCRIPTION	BY	APP'D
REVISIONS				
Detail No. Where Detailed				

All drawings, specifications and related documents are the copyright property of the Consultant and must be returned upon request. Reproduction of some or part or in whole is forbidden without the Consultant's written permission.
Only those drawings signed under original signature by an authorized representative of Hillier Landmarks Inc. are considered true copies.
Contractor must check and verify all dimensions and elevations on the job. Report any discrepancies to the Consultant. Do not scale drawing.



Project
ST. VITAL CREMATION GARDEN SITE WORKS CONTRACT
 WINNIPEG, MANITOBA

Drawing
PHASE TWO OVERALL SITE FEATURE IDENTIFICATION PLAN

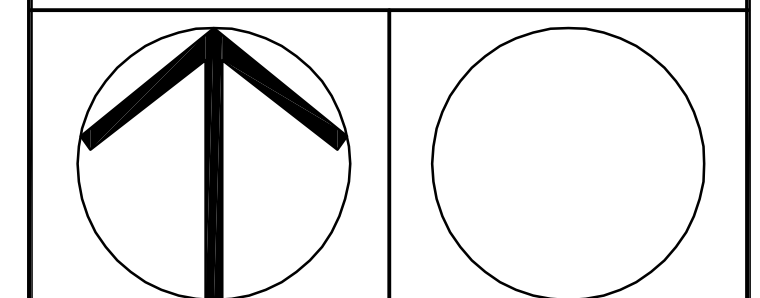

Scale: 1:150

Design By:	A.H./R.H.	Project No.	99048-05
Drawn By:	A.H.	Date:	March 2008
Checked By:	CAD File:	CAD File:	99048DD L-1
Drawing No.	L-1	Sheet No.	2 of 7

PLANTING BED PREPARATION:

- PLANTING AREAS TO BE EXCAVATED TO A DEPTH OF 500mm AND SOIL REPLACED WITH AMENDED SOIL MIX.
- REMOVE SUBSOIL, ROCKS, ROOTS, FOREIGN DEBRIS AND TOXIC MATERIAL FROM EXCAVATED MATERIAL. DISPOSE OF OFF SITE.
- PLANTING AREAS TO BE BACK FILLED, TAMPED (IN 150mm LIFTS), AND WATERED TO ELIMINATE AIR POCKETS.
- AMENDED PLANTING SOIL MIX:
 8 PARTS SCREENED SANDY LOAM TOPSOIL
 1 PART SHREDDED COMMERCIAL PEAT MOSS
 1 PART WELL ROTTED MANURE
 SOIL MIXTURE SUPPLEMENTED WITH
 -BONE MEAL AT A RATE OF 3kg/m³.
 -APPLICATION OF FERTILIZER (20-20-20).
- PLANTING AREAS TO BE MULCHED WITH 50mm CANADA #1 WESTERN RED CEDAR SHREDDED BARK MULCH