

#### STE ANNE'S NORTHBOUND CONTROL LINE - MH L03 TO 1050 LDS

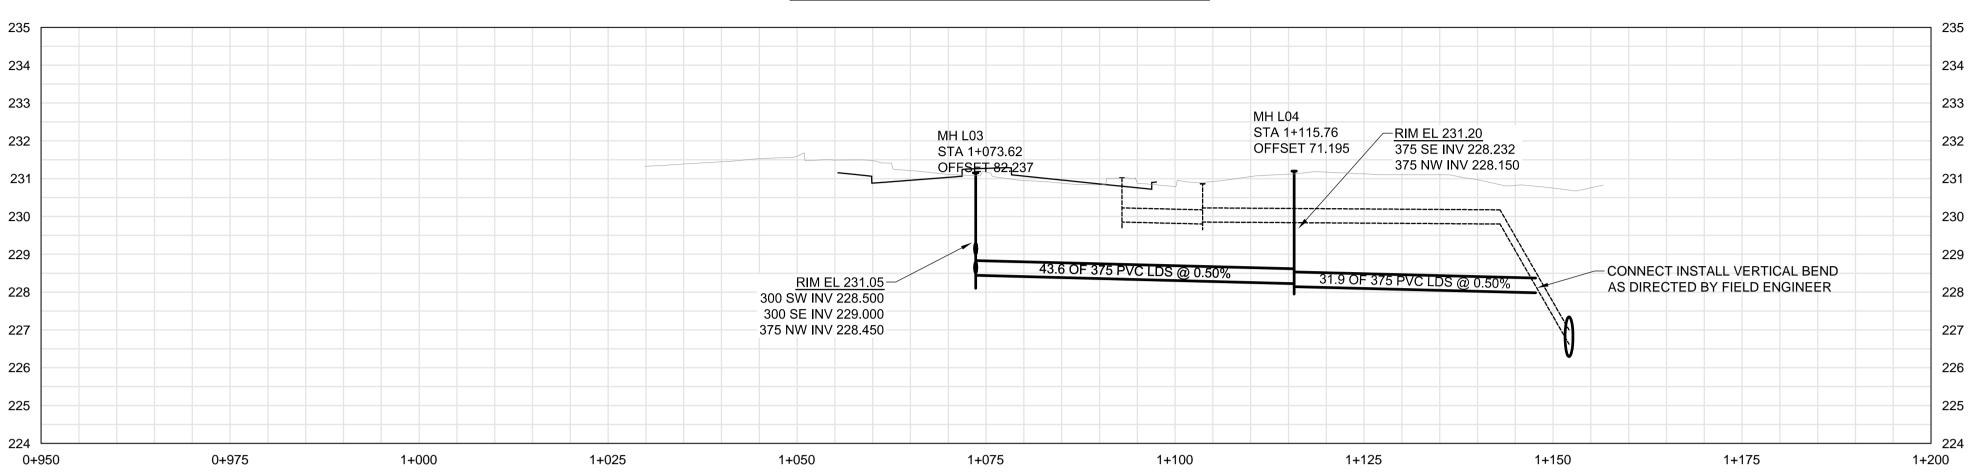

### STE ANNE'S NORTHBOUND CONTROL LINE - MH EX03 TO MH L01

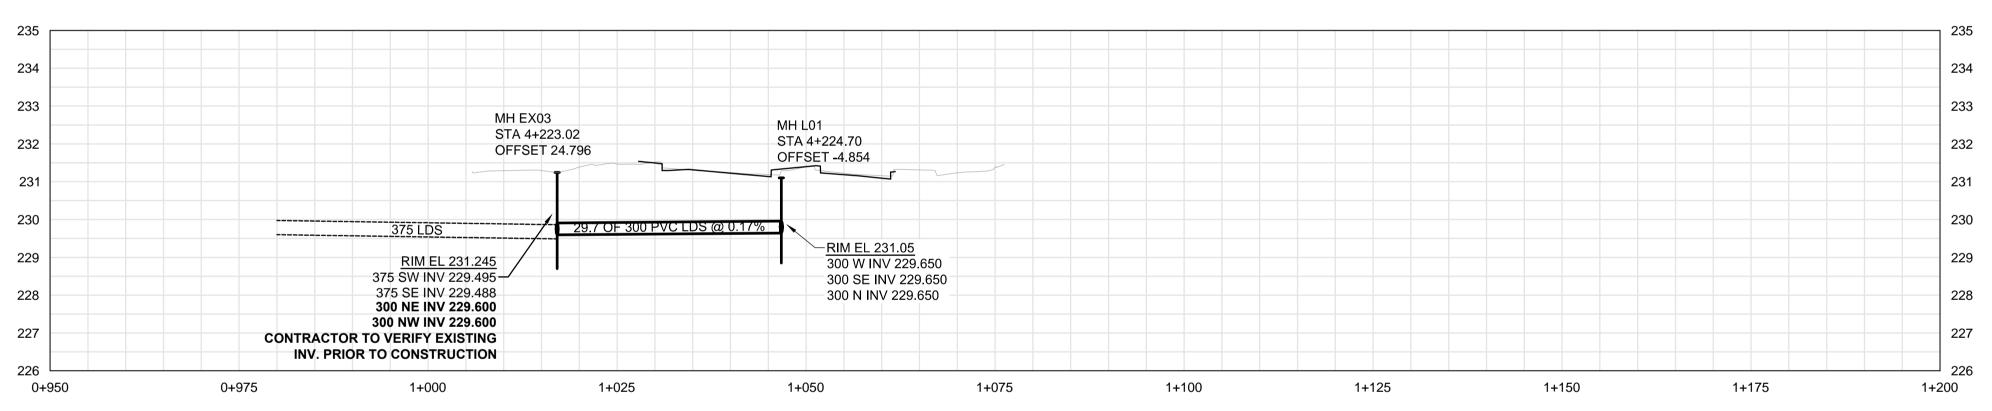

# **METRIC**

CONSTRUCTION NOTES:

CONSTRUCTION.

RESTRICTIONS.

ADJUSTMENT PHASING

1. ALL DIMENSIONS ARE TO BACK OF CURB.

2. ISOLATE MISCELLANEOUS ITEMS IN NEW CONCRETE WORKS AS PER SD-228C.

5. LOCATION OF EXISTING SERVICES TO BE

AND ISOLATE AS PER SD-220A.

GRIND OFF SYMBOL ON COVER.

8. PROTECT EXISTING LEGAL PINS IN NEW

9. CONCRETE PAVEMENT IN MINOR STREET

FROM CITY OF WINNIPEG LBIS.

3. LEGAL PLAN AND UNDERGROUND INFORMATION

4. CONTRACTOR TO TAKE PRECAUTIONARY STEPS TO AVOID DAMAGE FROM CONSTRUCTION ACTIVITIES TO TREES WITHIN THE LIMITS OF

CONFIRMED IN THE FIELD BY THE CONTRACTOR.

OR AS DIRECTED BY CONTRACT ADMINISTRATOR.

6. CB LEADS TO BE INSTALLED AT MIN. 1.0% SLOPE

7. ADJUST EXISTING CATCH BASINS AND MANHOLES

PAVEMENT UTILIZING A WATER VALVE INSERT.

APPROACHES, PRIVATE APPROACHES AND MEDIAN OPENINGS SHALL BE HAND PLACED WITH

INTEGRAL CURB CONSTRUCTION (SD-203A OR

SD-203B AS SPECIFIED). MAIN LINE CONCRETE

OTHERWISE REQUIRED DUE TO TRAFFIC STAGING

PAVEMENT SHALL BE SLIP FORMED UNLESS

10. INSTALL 150 mm SUB DRAIN IN BOTH DIRECTIONS OF CATCH BASINS WHERE INDICATED, ALONG

11. SEE STAGING DRAWINGS FOR REMOVAL AND

PAVEMENT EDGE AS PER SD-245 AND CAP ENDS.

WHOLE NUMBERS INDICATE MILLIMETRES DECIMALIZED NUMBERS INDICATE METRES

## WARNING

IF POWER EQUIPMENT OR EXPLOSIVES ARE TO BE USED FOR EXCAVATION ON THIS PROJECT THE CONTRACTOR MUST:

- 1. NOTIFY THE GAS COMPANY OF THE PROPOSED LOCATION OF EXCAVATION.
- 2. TAKE PRECAUTION TO AVOID DAMAGE TO GAS COMPANY INSTALLATIONS SEE PROVINCIAL REGULATION 210/72 FOR DETAILS.
- 3. OBTAIN EXCAVATION PERMITS PRIOR TO CONSTRUCTION.



ta	150 WM	WATERMAIN	150_WM		CONCRETE	• • • • • • • • • • • • • • • • • • • •	150 WM	WATERMAIN	150 WM		
Con		HYDRANT	-		ASPHALT		300 LDS	LAND DRAINAGE SEWER	300 LDS	l	
es/	$\otimes$	VALVE	$\otimes$		PLANING		250 wws	WASTE WATER SEWER	250 WWS		
ţ	$\circ$	MANHOLE	•		SIDEWALK			HYDRANT	+		
n/s		CATCH BASIN			PAVING STONES			VALVE		su	
ving	$\nabla$	CURB INLET	▼		PARTIAL DEPTH REPAIR	7.7.7.7.7.	—- <del>×</del> -—	€ PROFILE			
)rav	300 LDS	LAND DRAINAGE SEWER	300 LDS		PROPERTY LINE			NORTH/WEST GUTTER			
2/[	250 WWS	WASTE WATER SEWER	250 WWS	<b>─</b>	DRAINAGE ARROW	<b>→</b>	—————	SOUTH/EAST GUTTER		<b></b>   Lo	
593	HYDRO	HYDRO	HYDRO		CURB RAMP (SD-229C)		—— <u>A</u> ——	NORTH/WEST DITCH		SH A	
17	MTS	M.T.S.	MTS		DETECTABLE WARNING		— <del>V</del> —	SOUTH/EAST DITCH		TH.	
SAD,	100 GAS	GAS	100 GAS		SURFACE TILE (SD-229AA)					ĽĆ OE	
0/:5	EXISTING	LEGEND-PLAN	PROPOSED	EXISTING	LEGEND-PLAN	PROPOSED	EXISTING	LEGEND-PROFILE	PROPOSED	BE	

UNDERGROUND STRUCTURES  SUPV. U/G STRUCTURES  DATE		B.M. ELEV.				WPN	11.	ENGINEER'S SEAL	
					DRAWN BY	GLG		W.P. NAIRN NAIRN	
					CHECKED BY	WPN	DILLON		
LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION					APPROVED BY	_	CONSULTING	PROFFSSIONAL PROFF	
AVAILABLE. BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT.					HOR. SCALE	1:500	RELEASED FOR CONSTRUCTION		
LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE. BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCESTING WITH CONSTRUCTION	0	ISSUED FOR TENDER	18/02/09	WPN	VERTICAL	1:50		CONSULTANT PROJECT NUMBER	
BEFORE PROCEEDING WITH CONSTRUCTION.	NO.	REVISIONS	DATE	BY	DATE		DATE	17-5932	





## THE CITY OF WINNIPEG PUBLIC WORKS DEPARTMENT

FERMOR AVENUE BRIDGE OVER SEINE RIVER
BRIDGE REHABILITATION, PEDESTRIAN-CYCLIST UNDERPASS STRUCTURE
AND ROADWORKS FROM ST. ANNE'S ROAD TO ARCHIBALD STREET

CITY DRAWING NUMBER P-3489-2017-CU-007 007 11

ST. ANNE'S - STA. 0+950 TO STA. 1+200 (PROFILE)

CONSULTANT DRAWING NUMBER CU-007