


**NOTES:**

1. PROVIDE NEW TYPE 1 LUMINAIRE, WIRED AND CONNECTED TO EXISTING LIGHTING CIRCUIT. CONFIRM VOLTAGE ON SITE. TYPE 1 LUMINAIRE SHALL BE 2X4 3 LAMP RECESSED IN T-BAR CEILING C/W K12 LENS.
2. DISCONNECT AND RELOCATE EXISTING MOTION SENSOR. WIRE AND CONNECT TO EXISTING SYSTEM.
3. DISCONNECT AND RELOCATE EXISTING FIRE ALARM PULLSTATION. WIRE AND CONNECT TO EXISTING SYSTEM. PROVIDE VERIFICATION REPORT.
4. DISCONNECT AND RELOCATE EXISTING SWITCH. WIRE AND CONNECT TO EXISTING SYSTEM.
5. PROVIDE NEW LED EXIT SIGN. WIRE AND CONNECT TO EXISTING SYSTEM. CONFIRM VOLTAGE ON SITE.
6. WIRE AND CONNECT 3 HP PU-2 WITH 3#12 RW90 IN 1/2" C. TO 15A/3P BREAKER FROM NEAREST 347/600V DISTRIBUTION IN THE AREA. PROVIDE MAGNETIC HOA STARTER. CONFIRM COIL VOLTAGE WITH DIV.15.
7. WIRE AND CONNECT 1/3 HP PU-2A WITH 2#12 RW90 IN 1/2" C. TO 15A/1P BREAKER FROM NEAREST 120/208V PANEL IN THE AREA. PROVIDE MAGNETIC HOA STARTER. CONFIRM COIL VOLTAGE WITH DIV.15.
8. WIRE AND CONNECT 1/3HP SUPPLY FAN WITH 2#12 RW90 IN 1/2"C TO 15A/1P CIRCUIT BREAKER IN NEAREST SUITABLE PANELBOARD. PROVIDE MAGNETIC HOA STARTER. CONFIRM COIL VOLTAGE WITH DIV.15.



REV	DESCRIPTION	DATE	BY
2	RE-ISSUED FOR TENDER	2008/04/04	MCW
1	ISSUED FOR TENDER	2007/02/10	MCW

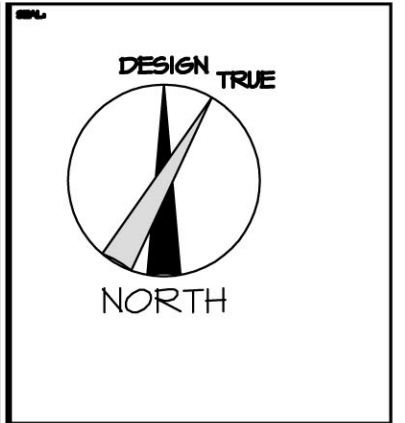

THIS DRAWING MUST BE USED AS SHOWN. THE GENERAL CONTRACTOR SHALL VERIFY ALL DIMENSIONS, SPACING AND INSTALLATION TO CONFORM WITH THIS AND ALL OTHER RELEVANT CODES AND REGULATIONS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS.

**VESTIBULE DETAILS**

**PAN AM POOL VESTIBULES**

25 Poasden Bay - Winnipeg, MB

Neil Cooper Architect Inc.  
10-395 Berry Street, Winnipeg, Manitoba R3J 1N6

**MCW / AGE**  
Consulting Professional Engineers  
215-1821 Wellington Avenue  
Winnipeg, Manitoba R3H 0G4  
Phone - (204) 779-7900 Fax - (204) 779-1119  
E-Mail: mcw\_age@mcw.com

6226	DESIGNED BY DG	CHECKED BY KEI	DATE OCT 8, 2007	SCALE As Noted	<b>E2.1R2</b>
------	-------------------	-------------------	---------------------	-------------------	---------------

**APEGM**  
Certificate of Authorization  
MCW/AGE Consulting  
Professional Engineers  
No. 589 Expiry: April 30, 2009