

PLANT LIST

KEY	QTY.	COMMON NAME/BOTANICAL NAME	SIZE	
DECIDUOUS TREES				
B	4	BUTTERNUT / JUGLANS CINEREA	60mm cal.	SPECIMEN, B&B, MACHINE DUG WITH MIN. 10 BRANCHES IN WELL BRANCHED HEAD, STRAIGHT TRUNK, MIN. HT. 6.0m, BRANCHING HT. 1.8m.
C	1	JAPANESE TREE LILAC / SYRINGA RETICULATA	60mm cal.	SPECIMEN, B&B, MACHINE DUG WITH MIN. 10 BRANCHES IN WELL BRANCHED HEAD, STRAIGHT TRUNK, MIN. HT. 3.0m, BRANCHING HT. 1.5m.
D	3	SPRING SNOW FL. CRAB / MALUS X 'SPRING SNOW'	60mm cal.	SPECIMEN, B&B, MACHINE DUG WITH MIN. 10 BRANCHES IN WELL BRANCHED HEAD, STRAIGHT TRUNK, MIN. HT. 3.0m, BRANCHING HT. 1.5m.
E	3	BUR OAK / QUERCUS MACROCARPA	60mm cal.	SPECIMEN, B&B, MACHINE DUG WITH MIN. 10 BRANCHES IN WELL BRANCHED HEAD, STRAIGHT TRUNK, MIN. HT. 6.0m, BRANCHING HT. 1.8m.
F	1	SHOWY MOUNTAIN ASH / SORBUS DECORA	60mm cal.	SPECIMEN, B&B, MACHINE DUG WITH MIN. 10 BRANCHES IN WELL BRANCHED HEAD, STRAIGHT TRUNK, MIN. HT. 6.0m, BRANCHING HT. 1.8m.
L	1	HARVEST GOLD LINDEN / TILIA MONGOLICA	60mm cal.	SPECIMEN, B&B, MACHINE DUG WITH MIN. 10 BRANCHES IN WELL BRANCHED HEAD, STRAIGHT TRUNK, MIN. HT. 6.0m, BRANCHING HT. 1.8m.
CONIFEROUS TREES				
J	4	BLACK HILLS SPRUCE / PICEA GLAUCA 'DENSATA'	100mm cal.	SPECIMEN, W.B. MACHINE DUG WITH SINGLE UPRIGHT LEADER. STRAIGHT TRUNK, WELL BRANCHED, FULL FORM.


NOTES

- ALL DIMENSIONS SHOWN IN METRIC UNITS. NUMBERS WITH DECIMALS INDICATE METERS. WHOLE NUMBERS INDICATE MILLIMETERS.
- ALL UTILITIES ARE SHOWN AS INFORMATION ONLY. CONTRACTOR TO CONFIRM LOCATION OF ALL UTILITIES ON SITE PRIOR TO CONSTRUCTION.
- CONTRACTOR TO STAKE OUT LOCATION OF ALL WORKS FOR APPROVAL BY CONTRACT ADMINISTRATOR PRIOR TO ANY CONSTRUCTION OR REMOVALS.
- CONTRACTOR TO CONFIRM ALL DIMENSIONS ON SITE AND REPORT ANY DISCREPANCIES TO THE CONTRACT ADMINISTRATOR PRIOR TO CONSTRUCTION.
- SLOPE TOLERANCES:
PATHWAY
-MIN. CROSS SLOPE 1%
-MAX. CROSS SLOPE 2%
-MAX. LOGITUDINAL 5%
SODDED AREA:
-MIN. 2%
-MAX. 25%
- DURING CONSTRUCTION, CONTRACTOR TO PROTECT TO CITY OF WINNIPEG STANDARDS ALL EXISTING TREES, SIDEWALKS, CURBS, SOD, UTILITIES, AND PAVING TO REMAIN. AREAS DAMAGED DURING CONSTRUCTION TO BE REPAIRED TO CITY OF WINNIPEG STANDARDS AT CONTRACTOR'S COST.
- CONSTRUCTION ACCESS TO BE LIMITED TO THE ROUTES SPECIFIED ON SITE BY CONTRACT ADMINISTRATOR.
- CONTRACTOR IS RESPONSIBLE FOR ALL REMOVALS AS REQUIRED TO CONSTRUCT ALL WORKS AS SHOWN ON PLANS AND DETAILS. ALL ITEMS TO BE REMOVED MUST BE DISPOSED OF LEGALLY OFF SITE.
- CONTRACTOR TO REPAIR ALL ON AND OFF SITE SODDED AREAS, SHRUB BEDS, TREES, CONCRETE, ROAD PAVING AND CURBS ETC., DAMAGED DURING CONSTRUCTION TO CONTRACT ADMINISTRATOR'S SATISFACTION AND TO THE CITY OF WINNIPEG STANDARDS AT HIS/HER OWN COST.
- ALL WORK TO BE DONE IN ACCORDANCE WITH CITY OF WINNIPEG STANDARD CONSTRUCTION SPECIFICATIONS UNLESS OTHERWISE NOTED.
- REFER ALSO TO WRITTEN SPECIFICATIONS.
- MAINTAIN EXISTING GRADES UNLESS OTHERWISE NOTED. ENSURE POSITIVE DRAINAGE TO ALL CATCH BASINS.
- ENSURE POSITIVE DRAINAGE ON NEW PATHWAYS AND IN ADJACENT SODDED AREAS. MAINTAIN EXISTING GRADE AND DRAINAGE PATTERNS WHERE POSSIBLE.
- SUITABLE GRANULAR BASE COURSE MATERIAL TO BE SALVAGED AND RE-USED AS INSTRUCTED BY CONTRACT ADMINISTRATOR.
- CONTRACTOR TO ADJUST GRADES OF ALL SERVICES WITHIN LIMIT OR WORK AS REQUIRED INCLUDING ALL MANHOLES, CATCH BASINS, FIRE HYDRANT, CURB STOPS ETC.
- REMOVAL OF EXISTING CLIMBERS, SWINGS, CONCRETE BASES, TIMBER EDGING, SAFETY SURFACING AND REQUIRED REPAIRS TO BE COMPLETED BY THE CITY OF WINNIPEG (N.I.C.).

No.	Revisions	Date	By
1	ADDENDUM #1	05/20/09	AH
	SUBMIT TO CITY FOR 100%	05/16/09	MW
	SUBMIT TO CITY FOR 60%	05/01/09	MW

No.	Scale
30-03-2009	1:300

Designed By: AH, Drawn By: MW, Checked By: AH

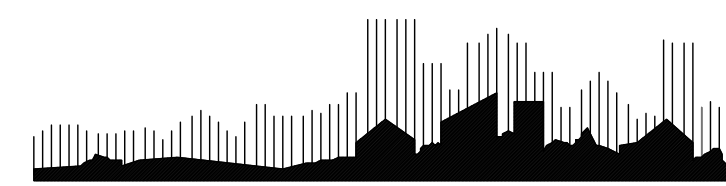

Client: CITY OF WINNIPEG

Project Title: HATCHER ROAD PARK

Sheet Title: LAYOUT/ PLANTING PLAN

Project No. 09-011, Drawing No. L1.2