

GENERAL NOTES

- A. THIS DRAWING IS DIAGRAMMATIC ONLY. DO NOT SCALE.
- B. CONTRACTOR SHALL BE RESPONSIBLE IN COORDINATING EXACT LAYOUTS, ROUTING, ETC.
- C. COORDINATE DIFFUSERS AND GRILLES WITH ELECTRICAL LAYOUT. CONFIRM ON SITE.
- D. PROVIDE NEW DUCT STATIC PRESSURE SENSOR IN SUPPLY DUCT. CONTRACTOR TO COORDINATE WITH AIR BALANCER.

- 5. ENSURE TAKE-OFFS ARE 45° ENTRY FITTINGS (NOT BELL MOUTH).
- 6. NEW ACOUSTICALLY-LINED DUCT.
- 7. REMOVE AND REPLACE EXISTING VAV TO SUIT NEW INSTALLATION.
- 8. REPLACE EXISTING DIFFUSER.


EQUIPMENT:

TYPE A GRILLE - PRICE PDF 400X400 FACE

DRAWING NOTES

- 1. CAP-OFF DUCTWORK OPENING, REMOVE EXISTING VAV 82 AND TURN OVER TO OWNER.
- 2. RELOCATE THERMOSTAT TO THIS LOCATION. INTERLOCK WITH VAV. REFER TO DRAWING.
- 3. EXISTING VAV TO REMAIN.
- 4. DEMOLISH EXISTING DUCTWORK TO WALL. REBUILD TO NEW DIMENSIONS PROVIDE ACOUSTIC LINING. RECONNECT BRANCH DUCT.

1 PART MAIN FLOOR PLAN - MECHANICAL
M-2 SCALE: 1:100

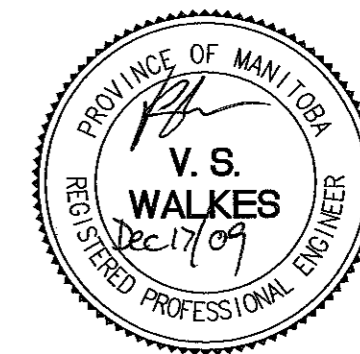

APEGM
 Certificate of Authorization
 SMS Engineering Ltd.
 No. 166 Expiry: April 30, 2010

SMS ENGINEERING
 SMS Engineering Ltd. Consulting Engineers
 770 Bradford Street Winnipeg MB Canada R3H 0N3
 Telephone 204.775.0291 Fax 204.772.2153
 sms@smseng.com

Project Title
RENOVATIONS TO ENGINEERING AND RECORD STORAGE AREAS - WATER AND WASTE OFFICES
 1199 PACIFIC AVE, WINNIPEG MB

Drawing Title
PART MAIN FLOOR MECHANICAL RENOVATION

Drawn By
RNS/OT
 Scale
1:100
 Revision Number
0

Checked By
VSW
 Date
DECEMBER 2009
 Drawing Number
M-2

Approved By
VSW
 Project No.
09-203-01
 Sheet Order
2 OF 6