


- CONSTRUCTION NOTES FOR PATHWAY:**
- STATIONING ALONG EAST EDGE OF PROPOSED GOLF COURSE PATHWAY.
 - STATIONING ALONG NORTH EDGE OF SOUTH CHIEF PEGUIS PATHWAY.
 - STATIONING ALONG SOUTH EDGE OF NORTH CHIEF PEGUIS PATHWAY.
 - STATIONING ALONG EAST EDGE OF NORTH CHIEF PEGUIS PATHWAY TO JOHN BLACK AVENUE.
 - LEGAL PLAN AND UNDERGROUND INFORMATION FROM CITY OF WINNIPEG LBIS.
 - CONTRACTOR TO TAKE PRECAUTIONARY STEPS TO AVOID DAMAGE FROM CONSTRUCTION ACTIVITIES TO TREES WITHIN THE LIMITS OF CONSTRUCTION.
 - LOCATION OF EXISTING SERVICES TO BE CONFIRMED IN THE FIELD BY THE CONTRACTOR.
 - LIMITS OF PATHWAY EARTH WORK TO BE FINALIZED IN THE FIELD BY THE CONTRACT ADMINISTRATOR.
 - PATHWAY TO HAVE MAX CROSS SLOPE OF 2% AND MAX LONGITUDINAL SLOPE OF 5%.
 - ENVIROGRID STRUCTURE TO BE USED WHERE CONSTRUCTION OF FULL DEPTH PATH STRUCTURE WOULD DAMAGE ROOTS OF NEARBY TREES. APPROX. 200 LINEAL METRES OF ENVIROGRID WILL BE USED BETWEEN STA: 0+400 TO STA: 0+805. LIMITS OF ENVIROGRID STRUCTURE TO BE FINALIZED IN THE FIELD BY THE CONTRACT ADMINISTRATOR.
 - LOCATION AND INVERTS OF CULVERTS TO BE FINALIZED IN THE FIELD BY THE CONTRACT ADMINISTRATOR.
 - LOCATION OF ACCESSIBLE BENCH NODES TO BE FINALIZED IN THE FIELD BY THE CONTRACT ADMINISTRATOR.
 - CONTRACTOR TO CLEAR AND GRUB BETWEEN LIMITS OF THE TOP OF CUT SLOPE AND TOE OF FILL SLOPE EXCEPT FOR TREES MARKED BY THE CONTRACT ADMINISTRATOR.

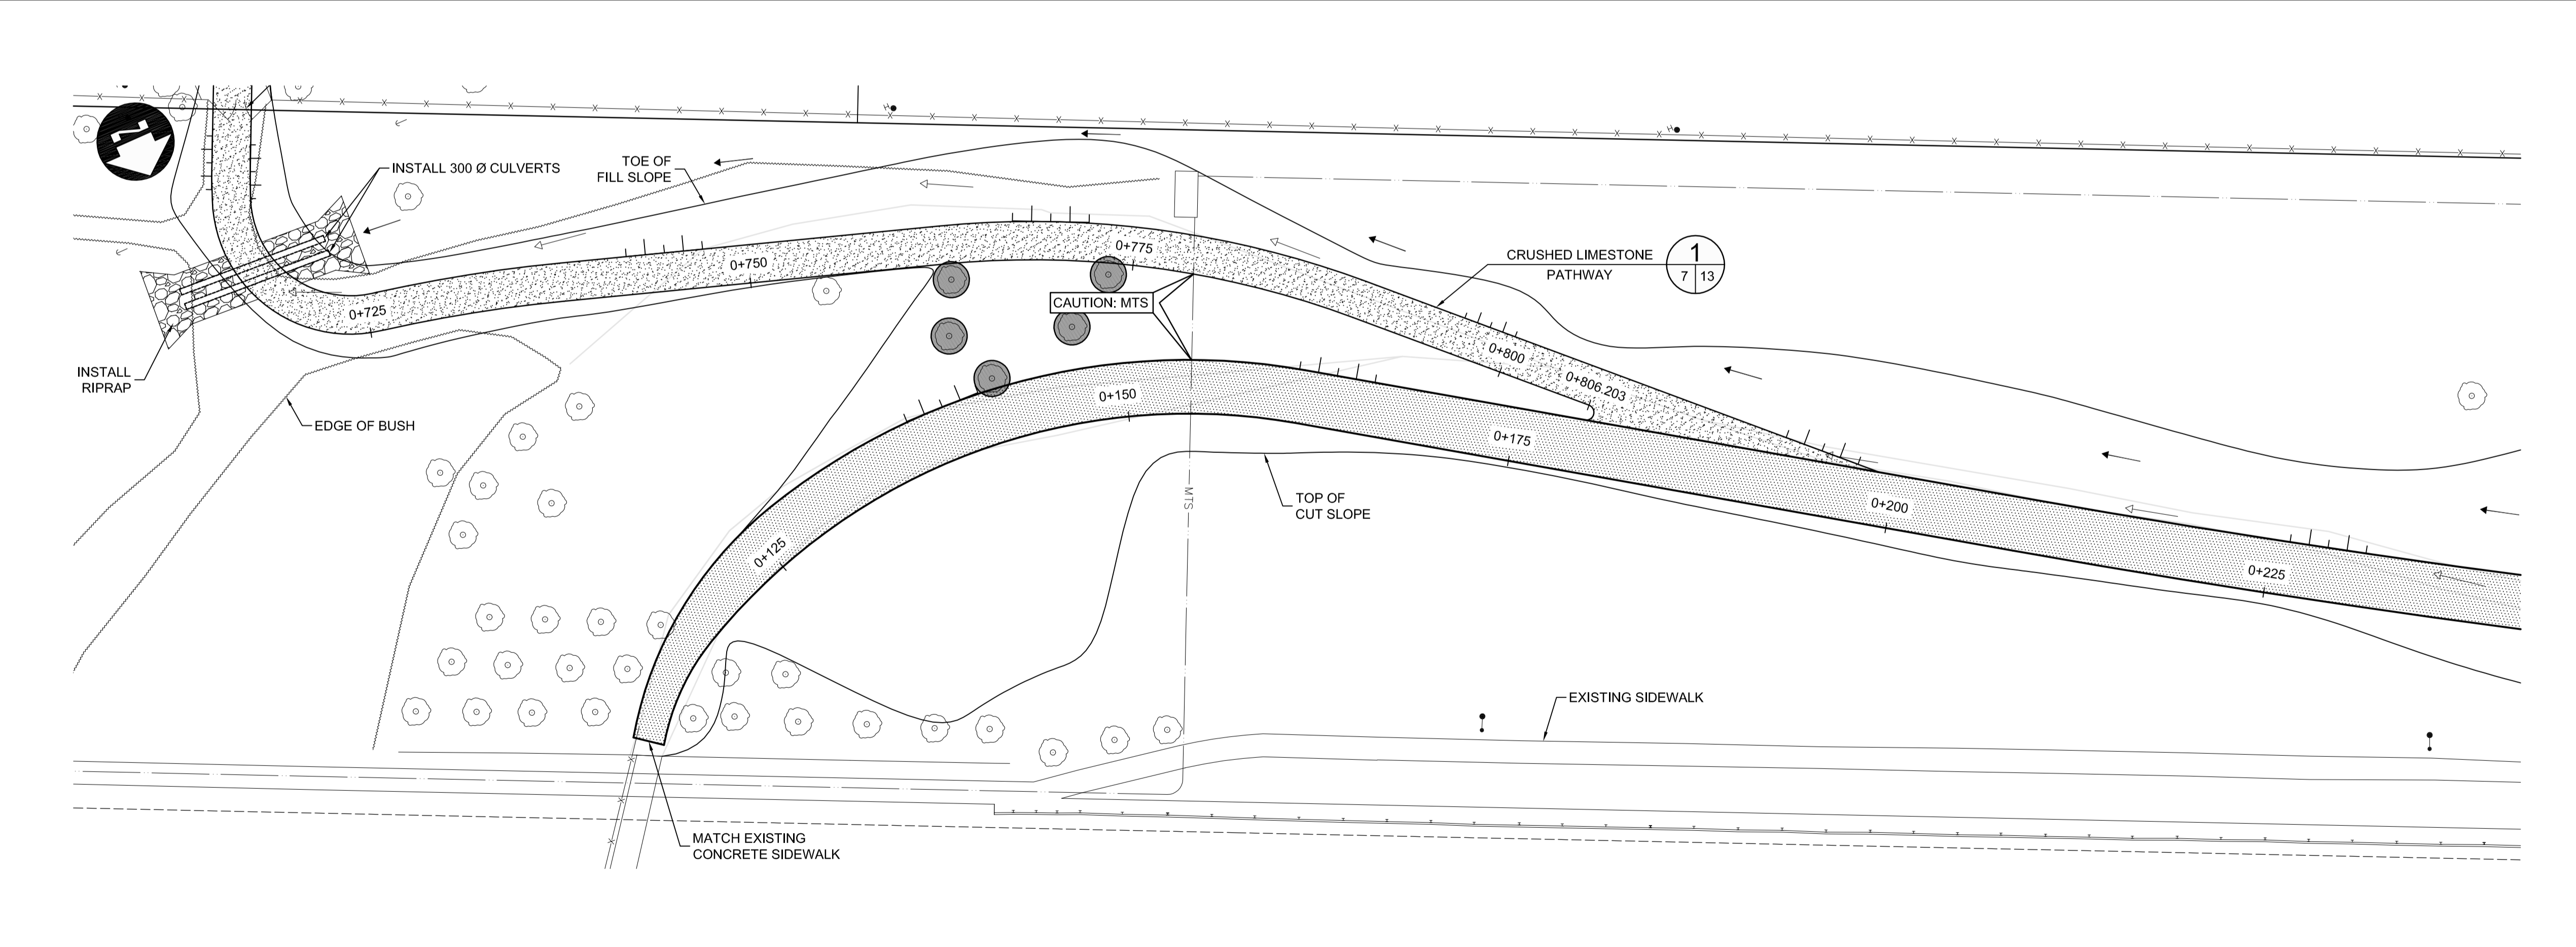

TREE WORKS LEGEND

- TREES TO BE REMOVED
- TREES TO BE PRUNED
- DEADWOOD AND DEBRIS TO BE DISPOSED OF

NOTE:
NEW TREE PLACEMENT, TREE REMOVAL AND PRUNING TO BE FINALIZED IN THE FIELD BY THE CONTRACT ADMINISTRATOR.

METRIC
WHOLE NUMBERS INDICATE MILLIMETRES
DECIMAL NUMBERS INDICATE METRES

WARNING
IF POWER EQUIPMENT OR EXPLOSIVES ARE TO BE USED FOR EXCAVATION ON THIS PROJECT THE CONTRACTOR MUST:

- NOTIFY THE GAS COMPANY OF THE PROPOSED LOCATION OF EXCAVATION.
- TAKE PRECAUTION TO AVOID DAMAGE TO GAS COMPANY INSTALLATIONS SEE PROVINCIAL REGULATION 210/72 FOR DETAILS.

APEGM
Certificate of Authorization
Dillon Consulting Limited (MB)
No. 1789 Date: 08/17/2010

150 WM	WATERMAIN	150 WM	HYDRO	HYDRO	HYDRO	150 mm W.M.	WATERMAIN	150 mm W.M.
⊕	HYDRANT VALVE	⊕	MTS	MTS	MTS	+	HYDRANT VALVE	+
⊗	300 LDS LAND DRAINAGE SEWER	⊗	300 LDS	300 LDS	300 mm L.D.S.	⊗	LAND DRAINAGE SEWER	300 mm L.D.S.
⊖	250 WWS WASTE WATER SEWER	⊖	250 WWS	250 WWS	250 mm W.W.S.	⊖	WASTE WATER SEWER	250 mm W.W.S.
○	MANHOLE	●				○	MANHOLE	
□	CATCH BASIN	■				□	CATCH BASIN	
▽	CURB INLET	▽				▽	CURB INLET	
—	JUNCTIONS	—				—	JUNCTIONS	
—	CULVERT	—				—	CULVERT	
—	100 GAS	—				—	100 GAS	
—	EXISTING	—	LEGEND-PLAN	PROPOSED	EXISTING	—	LEGEND-PROFILE	PROPOSED

UNDERGROUND STRUCTURES

SUPPLY U/G STRUCTURES COMMITTEE DATE

NOTE:
LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.

B.M. ELEV.					
DESIGNED BY	SPC/RTP				
DRAWN BY	TJH				
CHECKED BY	DBW				
APPROVED BY					
HOR. SCALE	1 : 250				
VERTICAL	1 : 25				
NO.	REVISIONS	DATE	BY	DATE	
2	ISSUED FOR TENDER	08/17/10	DBW		
1	ISSUED FOR 90% REVIEW	07/23/10	DBW		

RELEASED FOR CONSTRUCTION	DATE
DATE	

DILLON CONSULTING

ENGINEER'S SEAL
PROVINCE OF MANITOBA
REGISTERED PROFESSIONAL ENGINEER
D.B. WIEBE
08/17/10
Member 22480
CONSULTANT PROJECT NUMBER
09-2692

THE CITY OF WINNIPEG
PUBLIC WORKS DEPARTMENT

2010 ACTIVE TRANSPORTATION INFRASTRUCTURE STIMULUS PROGRAM - KILDONAN PARK GOLF COURSE PATHWAY

KILDONAN PARK GOLF COURSE PATHWAY (5 OF 5)

CITY DRAWING NUMBER: W-382-07
SHEET 07 OF 15
CONSULTANT DRAWING NUMBER

G:\AD\092692\Contract\ATP-GOLF-COURSE.dwg