

NORTH

WEST END ELEVATION -DOWEL LAYOUT

- DOWELS TO BE SHIFTED ± TO AVOID JOINTS IN LIMESTONE

NOTE:


CONFLICTS.


1. P15XX DOWELS MIN 450 EMBEDMENT INTO LIMESTONE, EPOXY GROUT WITH HILTI HIT RE500 V3 EPOXY

DOWELS TO BE SHIFTED ± TO AVOID JOINTS IN LIMESTONE

SHIFT DOWELS AS REQUIRED TO AVOID REINFORCING



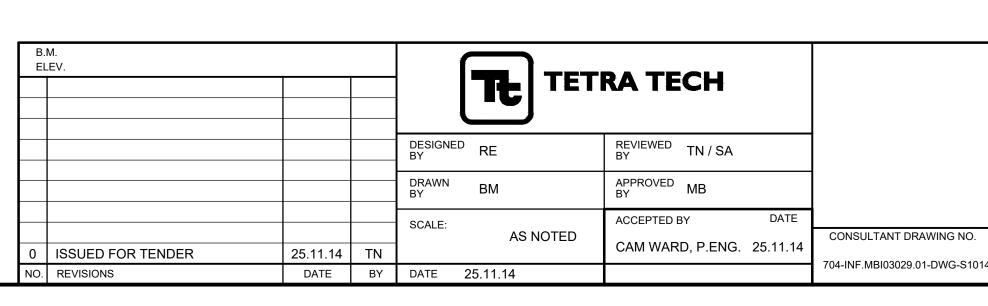

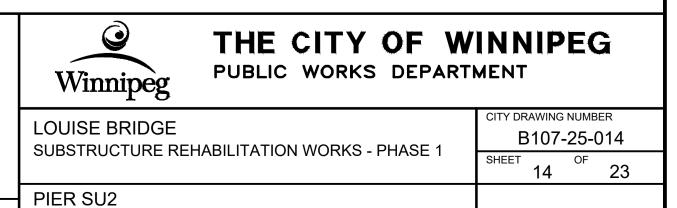

REINFORCING DETAILS SHEET 2 OF 5

14