



- NOTES:**
- REFER TO SPECIFICATION E13. CONSTRUCTION OF VARIOUS CURB TYPES FOR ASPHALT PAVEMENT OF THE TENDER DOCUMENT
  - TRANSVERSE JOINT SAW CUT EVERY 3.0m TO A MAXIMUM DEPTH OF 25mm

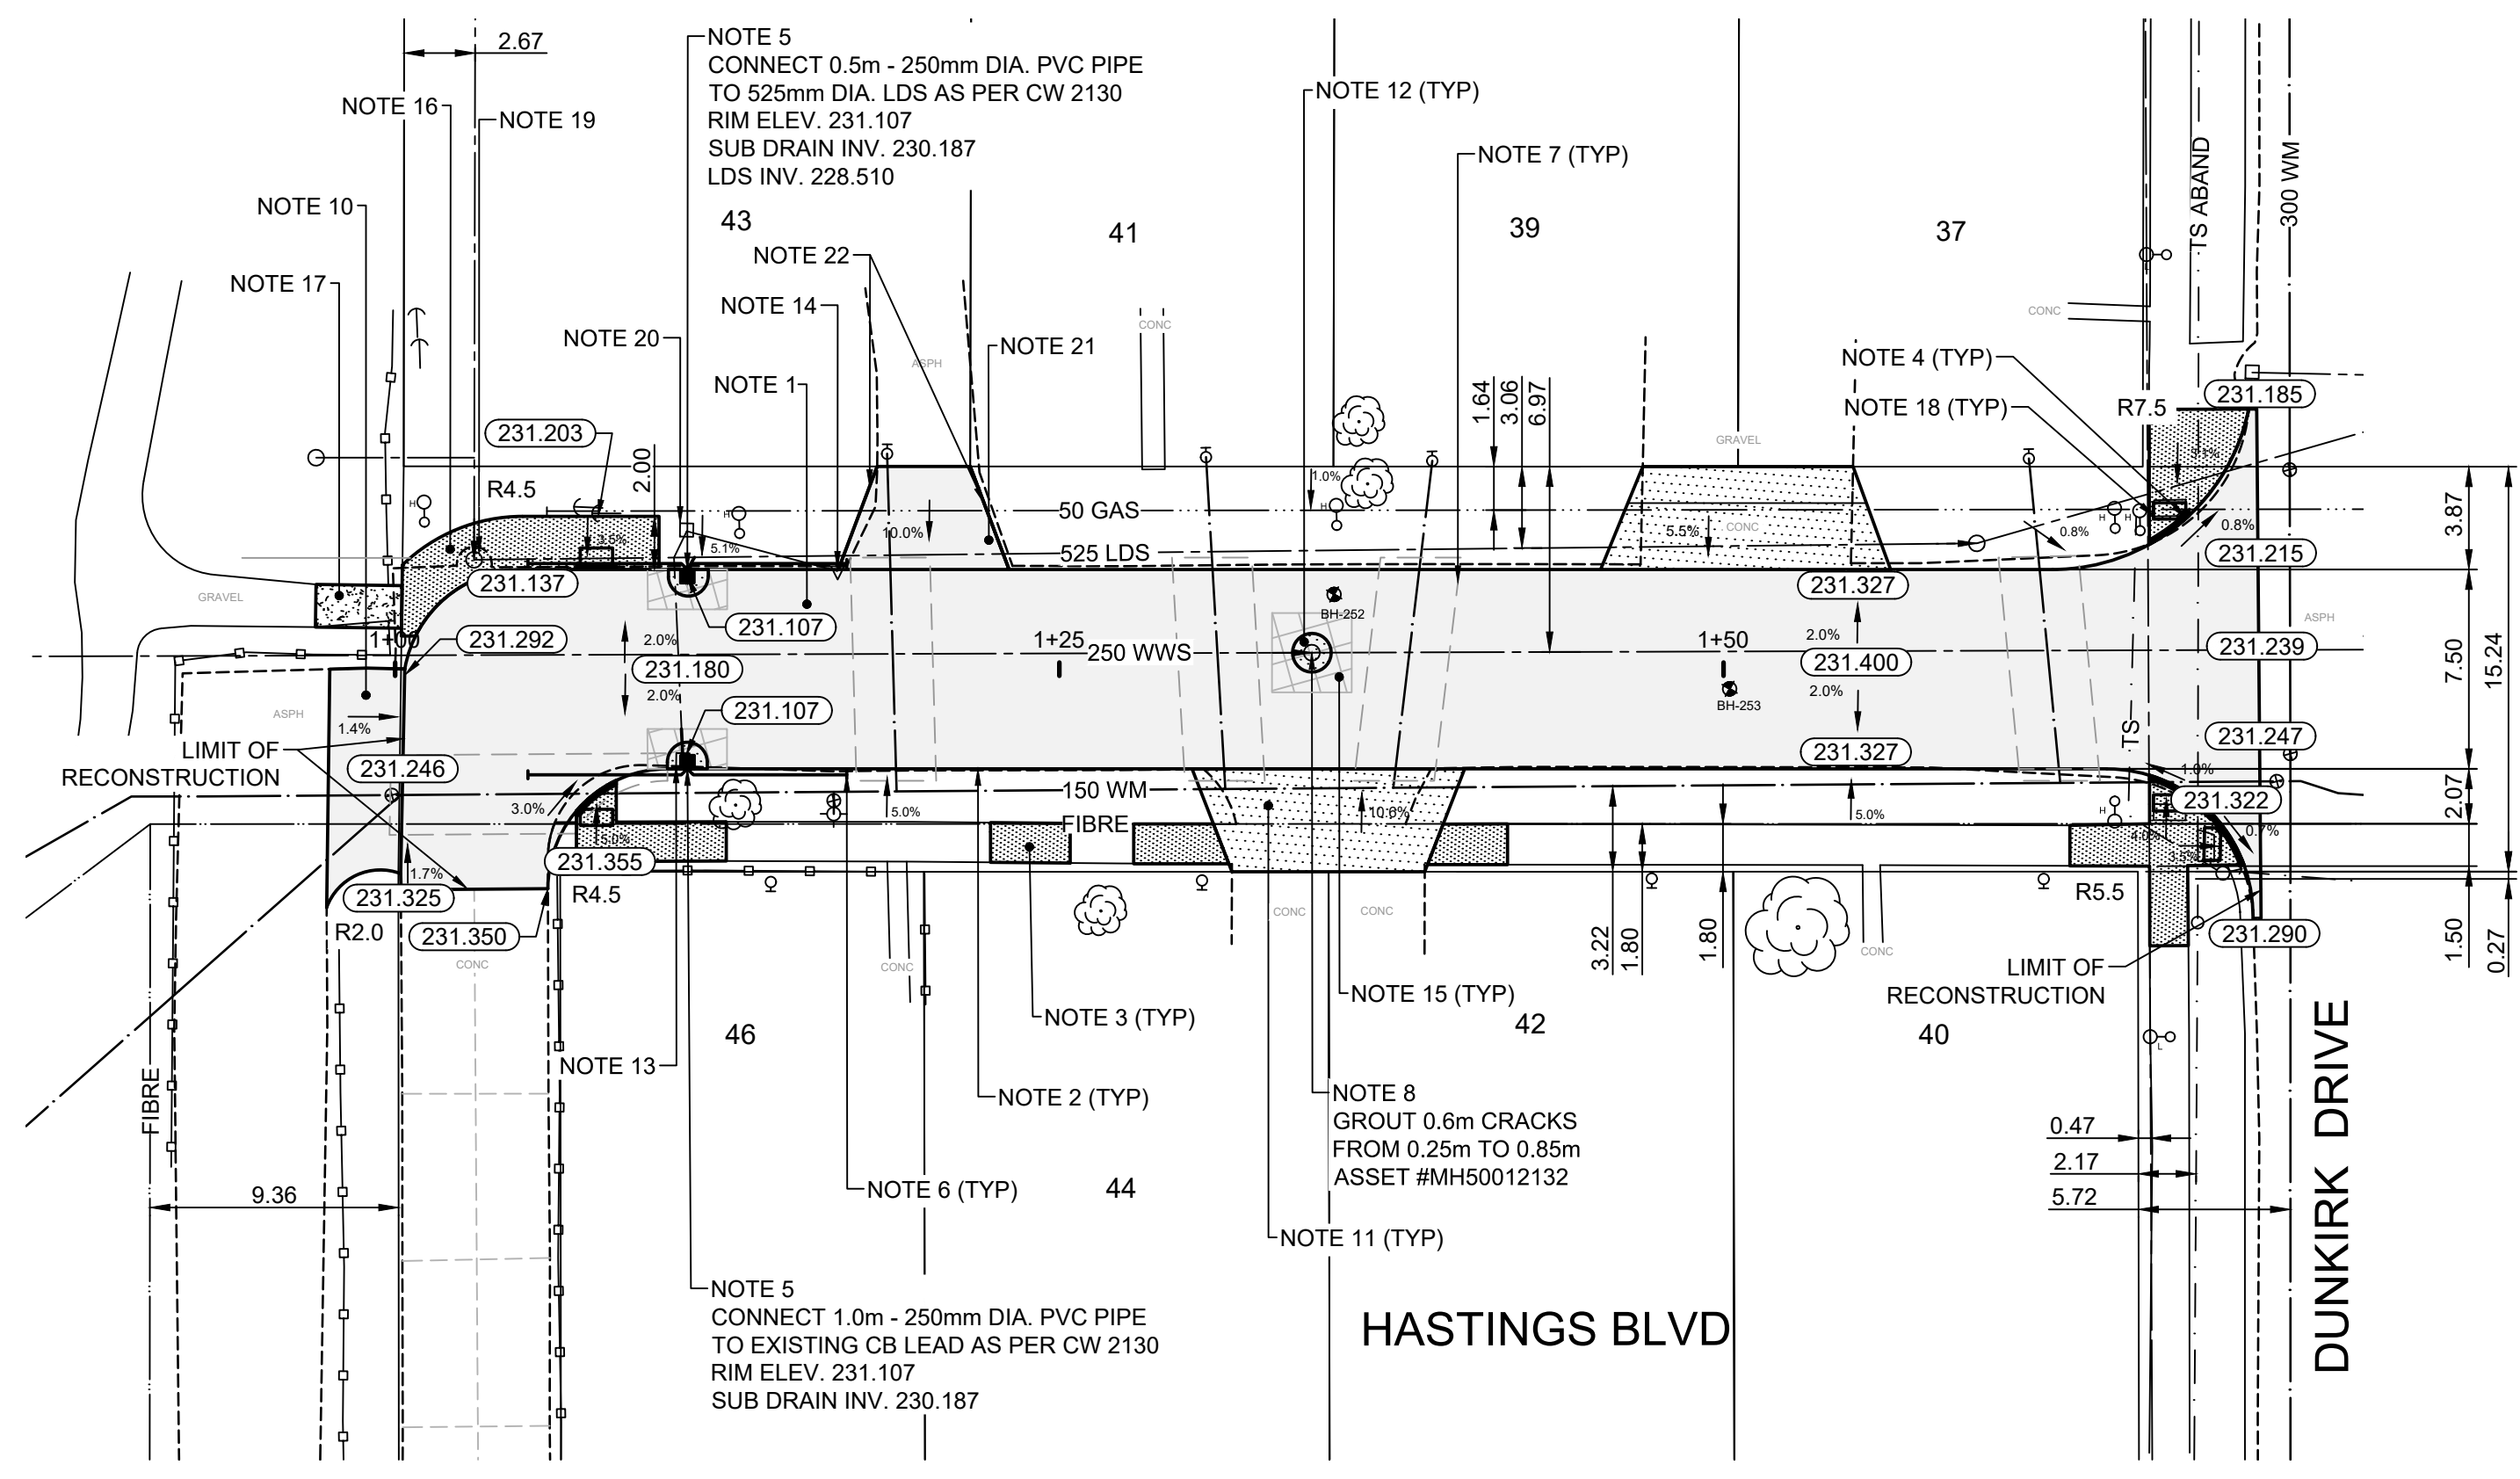

- CONSTRUCTION NOTES**
- REMOVE EXISTING PAVEMENT AND CONSTRUCT NEW 125mm ASPHALT PAVEMENT AS PER CROSS SECTION "A"
  - CONSTRUCT NEW REVERSED CONCRETE CURB AND GUTTER (E13)
  - RENEW EXISTING 100mm CONCRETE SIDEWALK (SD-228A, SD-228AA, E24)
  - CONSTRUCT NEW CURB RAMP AND MODIFIED BARRIER CURB AS PER (E13)
  - INSTALL NEW 1800 CATCH BASIN WITH CURB & GUTTER INLET (SD-024, E26), CONNECT TO EXISTING CATCH BASIN LEAD WITH 250mm Ø PVC PIPE (CW 2130)
  - INSTALL SUB DRAINS (SD-245) AND CONNECT TO CATCH BASIN. CAP ENDS AS PER CW 3120
  - INSULATE WATER SERVICE AS PER (SD-018)
  - INSTALL NEW FRAME AND SOLID COVER (AP-006, AP-007) AND ADJUST TO GRADE
  - RENEW 100mm CONCRETE PRIVATE WALK
  - REMOVE EXISTING ASPHALT AND PLACE NEW ASPHALT (50mm TYP.)
  - REMOVE EXISTING APPROACH AND CONSTRUCT NEW 150mm REINFORCED CONCRETE APPROACH WITH LIP CURB FOR ASPHALT PAVEMENT (SD-202B, SD-235, SD-237, E13)
  - CONSTRUCT 150mm CONCRETE ISOLATION (SD-220D)
  - REMOVE EXISTING CATCH BASIN
  - REMOVE EXISTING CATCH PIT
  - INSTALL PAVEMENT REPAIR FABRIC (TYPE A, CW 3140.2)
  - CONSTRUCT NEW 100mm CONCRETE SIDEWALK (SD-228A, SD-228AA, E24)
  - RE-GRADE GRAVEL PATH
  - INSTALL NEW DETECTABLE WARNING SURFACE TILE (SD-229E)
  - ADJUST FRAME AND COVER TO GRADE (CW 3210)
  - ABANDON CATCH BASIN AS PER (CW2130)
  - REMOVE EXISTING APPROACH AND CONSTRUCT NEW ASPHALT APPROACH WITH LIP CURB FOR ASPHALT PAVEMENT (SD-238B, E13)
  - CONSTRUCT 100mm x 200mm CAST-IN-PLACE CURB WITH TWO 15M DEFORMED BARS AS PER (SD-238B)

- GENERAL NOTES**
- PAVEMENT DIMENSIONS ARE TO BACK OF CURB
  - ALL CURB RADII UNDER 15.0m SHALL BE MODIFIED (SD-203B)
  - PAVEMENT REPAIRS ARE A REPRESENTATIVE SAMPLE OF THE TENDERED QUANTITIES
  - CURB REPLACEMENT AS DIRECTED BY CONTRACT ADMINISTRATOR
  - ASPHALT TIE-IN LIMITS TO BE DETERMINED IN FIELD BY CA
  - ADJUST ALL WATER VALVES AND CURB STOPS TO GRADE
  - CONTRACTOR TO CONFIRM THE LOCATION OF ALL UTILITIES/SERVICES IN THE FIELD PRIOR TO CONSTRUCTION
  - ALL WATER SERVICES WITHIN THE LIMITS OF THE RECONSTRUCTION SHALL BE INSULATED AS PER SD-018
  - REFER TO APPENDIX 'D' MANITOBA HYDRO ALLOWABLE EXCAVATIONS AROUND EXISTING POLES AND ANCHORS OF THE TENDER DOCUMENT

ISSUED FOR TENDER  
NOT TO BE USED FOR  
CONSTRUCTION

**METRIC**  
WHOLE NUMBERS INDICATE MILLIMETERS  
DECIMALIZED NUMBERS INDICATE METERS


TENDER NO. 13-2025

SYMBOL	BOREHOLE LOCATION	SYMBOL	LDS/WWS	SYMBOL	PAVEMENT REPAIR FABRIC	SYMBOL	LOCATION APPROVED UNDERGROUND STRUCTURES
⊕	HYDRANT	◆	---	---	XXXXXX	---	B.M. 18 SOUTH EAST CORNER OF DUNKIRK DR AT HASTINGS BLVD ELEV. 231.317
⊕	VALVE	◆	---	---	---	---	
⊕	CURB STOP	◆	---	---	---	---	
⊕	MANHOLE	●	---	---	---	---	
⊕	CATCH BASIN	□	---	---	---	---	
△	CATCH PIT/CURB INLET	▲	---	---	---	---	
⊕	HYDRO POLE	◆	---	---	---	---	
⊕	LIGHT STANDARD	◆	---	---	---	---	
⊕	TRAFFIC SIGNAL POLE	◆	---	---	---	---	
⊕	SURVEY BAR	◆	---	---	---	---	
⊕	TREE	◆	---	---	---	---	
---	EXISTING	---	---	---	---	---	
---	LEGEND - PLAN	---	---	---	---	---	
---	PROPOSED	---	---	---	---	---	
---	EXISTING	---	---	---	---	---	
---	LEGEND - PLAN	---	---	---	---	---	
---	PROPOSED	---	---	---	---	---	
---	EXISTING	---	---	---	---	---	
---	LEGEND - PROFILE	---	---	---	---	---	
---	PROPOSED	---	---	---	---	---	

NO.	REVISIONS	DATE	BY
3.	ADDENDUM 1	2025/03/24	JW
2.	SUBMIT FOR TENDER	2025/03/13	JW
1.	PLAN APPROVAL	2025/02/07	AK

**ENGINEERING DIVISION  
TECHNOLOGY SERVICES BRANCH  
106 - 1155 PACIFIC AVE**

DESIGNED BY: A.K.      CHECKED BY: E.H., R.W.  
 DRAWN BY: A.K.      APPROVED BY: J.T.S.  
 HOR. SCALE: 1 : 250  
 VERTICAL: 1 : 10  
 DATE: 2025/03/19

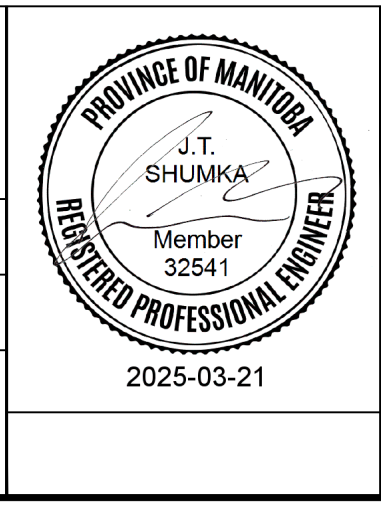

**THE CITY OF WINNIPEG  
PUBLIC WORKS DEPARTMENT**

**HASTINGS BLVD**  
FROM WEST BACK LANE TO DUNKIRK DRIVE  
ASPHALT PAVEMENT RECONSTRUCTION AND ASSOCIATED WORKS  
FROM STA. 1+00 TO STA. 1+70.28

CITY DRAWING NUMBER  
SE-25-509  
SHEET 10 OF 25  
**1**