


APPENDIX 'I'

CONCRETE CURB AND REVERSED GUTTER FOR ASPHALT PAVEMENT DETAILS

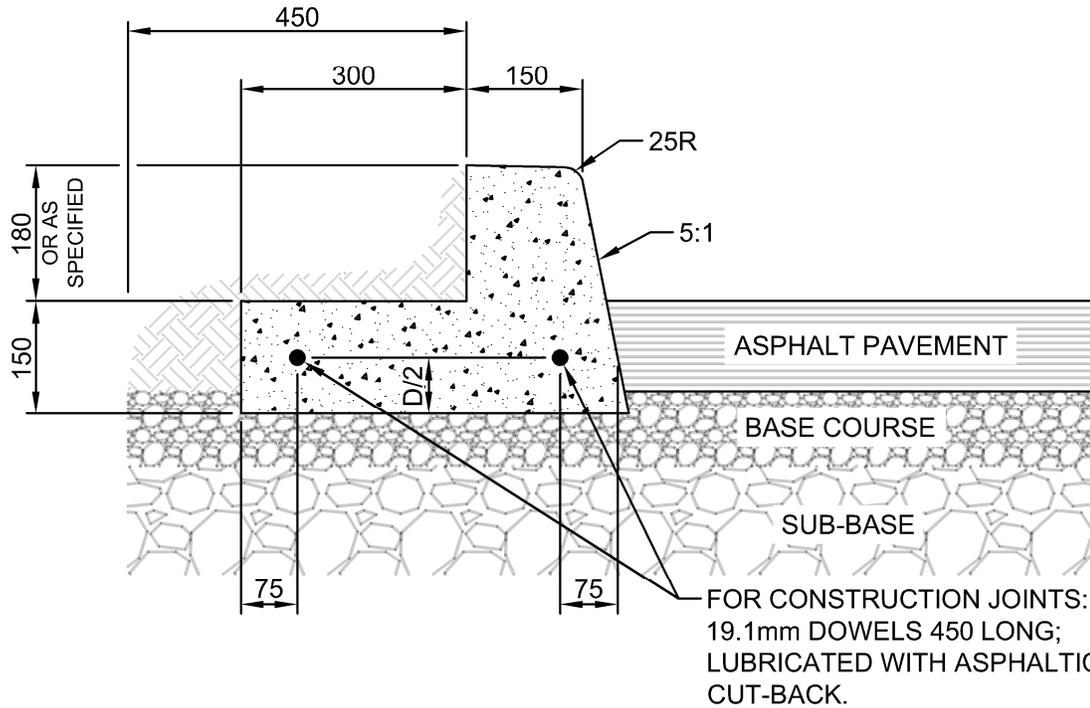

NOTES:

1. TRANSVERSE SAW CUT EVERY 3m OR AT PAVEMENT JOINTS
2. TRANSVERSE SAW CUTS ARE TO BE A MAXIMUM DEPTH OF 25mm

DIMENSIONS IN MILLIMETRES



THE CITY OF WINNIPEG
PUBLIC WORKS DEPARTMENT

Reference Spec. No.
CW 3325

Revisions

No.	Date	Description	By

**BARRIER CURB AND
REVERSED GUTTER FOR
ASPHALT PAVEMENT**

Designed By:
A.G.

Drawn By:
T.K.

Scale :
N.T.S


Checked By:
B.K.

Date:
2025-02-06

Drawing No.

Approved:
PAVEMENT MANAGEMENT BRANCH

SD-200AA

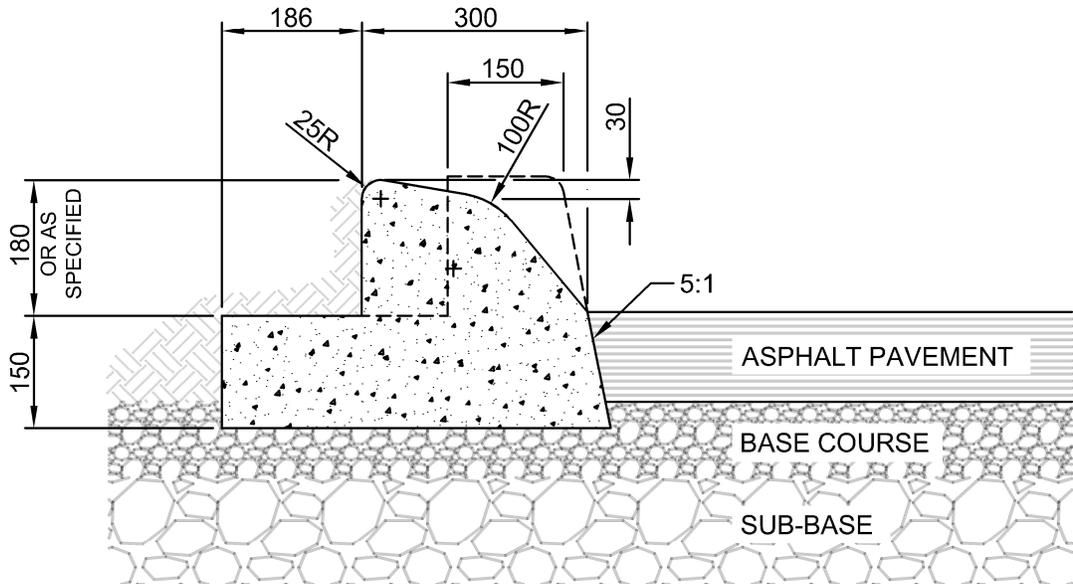

NOTES:

1. TRANSVERSE SAW CUT EVERY 3m OR AT PAVEMENT JOINTS
2. TRANSVERSE SAW CUTS ARE TO BE A MAXIMUM DEPTH OF 25mm
3. FOR CONSTRUCTION JOINTS INSTALL TWO 19.1mm DOWELS 450 LONG; LUBRICATED WITH ASPHALTIC CUT-BACK. REF SD-200AA.

DIMENSIONS IN MILLIMETRES

 THE CITY OF WINNIPEG PUBLIC WORKS DEPARTMENT	Revisions			
Reference Spec. No. CW 3325				
MODIFIED BARRIER CURB WITH REVERSED GUTTER FOR ASPHALT PAVEMENT	No. Date Description By	Designed By: A.G.	Drawn By: T.K.	Scale : N.T.S
		Checked By: B.K.	Date: 2025-01-31	Drawing No.
		Approved: PAVEMENT MANAGEMENT BRANCH		SD-203CA