

GENERAL NOTES:

1. PERFORM WORK IN ACCORDANCE WITH ALL APPLICABLE CODES AND REGULATIONS.
2. REVIEW EQUIPMENT LOCATIONS WITH CONTRACT ADMINISTRATOR PRIOR TO INSTALLATION.
3. PIPE ROUTING INDICATED ON DRAWINGS ARE APPROXIMATE ONLY. CONFIRM IN FIELD. REROUTE PIPING TO ELIMINATE FIELD INTERFERENCES WITH BUILDING STRUCTURES, ELECTRICAL ETC. CONFIRM CHANGES WITH CONTRACT ADMINISTRATOR.
4. FIRE SEAL ALL PIPE PENETRATIONS TO MAINTAIN EXISTING FIRE SEPARATIONS.
5. REFER TO PIPING SCHEMATICS FOR DETAILS.
6. PROVIDE ACCESS DOORS FOR ALL EQUIPMENT AND DAMPERS LOCATED ABOVE DRYWALL CEILINGS.

KEY NOTES:

1. INSTALL NEW GLYCOL SUPPLY (GS) AND GLYCOL RETURN (GR) PIPING AS INDICATED. (TYP)
2. RUN PIPING DOWN TO REHEAT COILS. REFER TO DRAWING M3 FOR REHEAT COIL LOCATIONS (TYP).
3. TIE NEW GLYCOL SUPPLY AND RETURN PIPING INTO GLYCOL SUPPLY AND RETURN PIPING INSTALLED DURING PREVIOUS PHASE.

LEGEND:

- NEW EQUIPMENT OR PIPING
- EXISTING EQUIPMENT/DUCTWORK/PIPING
- RHC RE-HEAT COIL
- GS GLYCOL SUPPLY
- GR GLYCOL RETURN
- CUH CABINET UNIT HEATER
- TP TIE IN POINT


MEZZANINE/SECOND FLOOR PLAN
 2000 0 2000 4000 6000 8000
 SCALE: 1:100mm

KGS FILE NO.: P:\PROJECTS\2011\11-0107-02\DWG\MECH\11-0107-02_M4.dwg



B.M.	
ELEV.	
DESIGNED BY	PSS
CHECKED BY	<i>[Signature]</i>
DRAWN BY	VJH
APPROVED BY	
HOR. SCALE:	AS SHOWN
VERTICAL:	
RELEASED FOR CONSTRUCTION:	
NO.	REVISIONS
DATE	BY
DATE	DATE

KGS GROUP
 CONSULTING ENGINEERS & PROJECT MANAGERS
 WINNIPEG (204) 896-1209
 THUNDER BAY (807) 345-2233

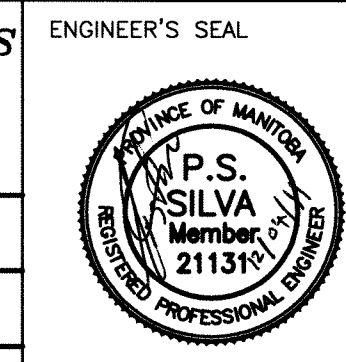

THE CITY OF WINNIPEG
 PUBLIC WORKS DEPARTMENT

PROJECT TITLE: FORT ROUGE LEISURE CENTRE HVAC UPGRADE - PHASE 2

SHEET 001 OF 001

COMPUTER FILE NAME: 11-0107-02-P2-M04

CITY DRAWING NUMBER

CONSULTANT DRAWING NO. P2-M04

SECOND/MEZZANINE FLOOR PLAN
 NEW PIPING