

TYPICAL SECTION



SCALE HOR. 1:150
VER. 1:50

CONSTRUCTION SCOPE OF WORK

- PLANING EXISTING ASPHALT SURFACE
- CONCRETE PAVEMENT RENEWALS (SLAB, JOINT, ISOLATIONS)
- FULL BARRIER CURB RENEWAL
- PLACEMENT OF ASPHALT OVERLAY
- SIDEWALK RENEWAL
- CATCH-PIT INSTALLATION

NOTES:

1. PAVEMENT DIMENSIONS ARE TO BACK OF CURB.
2. PROPERTY LINES OBTAINED FROM CITY OF WINNIPEG. NO SCALE FACTOR WAS APPLIED.
3. ALL SIDEWALK, CURB, AND CONCRETE REPAIRS TO BE MARKED OUT IN FIELD BY CONTRACT ADMINISTRATOR.
4. ALL ADJUSTMENTS FOR CATCHBASINS, MANHOLES, VALVES & INLETS TO BE MARKED IN FIELD BY CONTRACT ADMINISTRATOR.
5. PAVEMENT REPAIRS SHOWN ARE ONLY A REPRESENTATIVE APPROXIMATION OF THE TENDERED QUANTITIES.
6. ASPHALT TIE-INS ON APPROACHES TO BE DETERMINED IN FIELD BY THE CONTRACT ADMINISTRATOR.
7. ASPHALT GRADES TO BE MARKED IN FIELD BY THE CONTRACT ADMINISTRATOR.

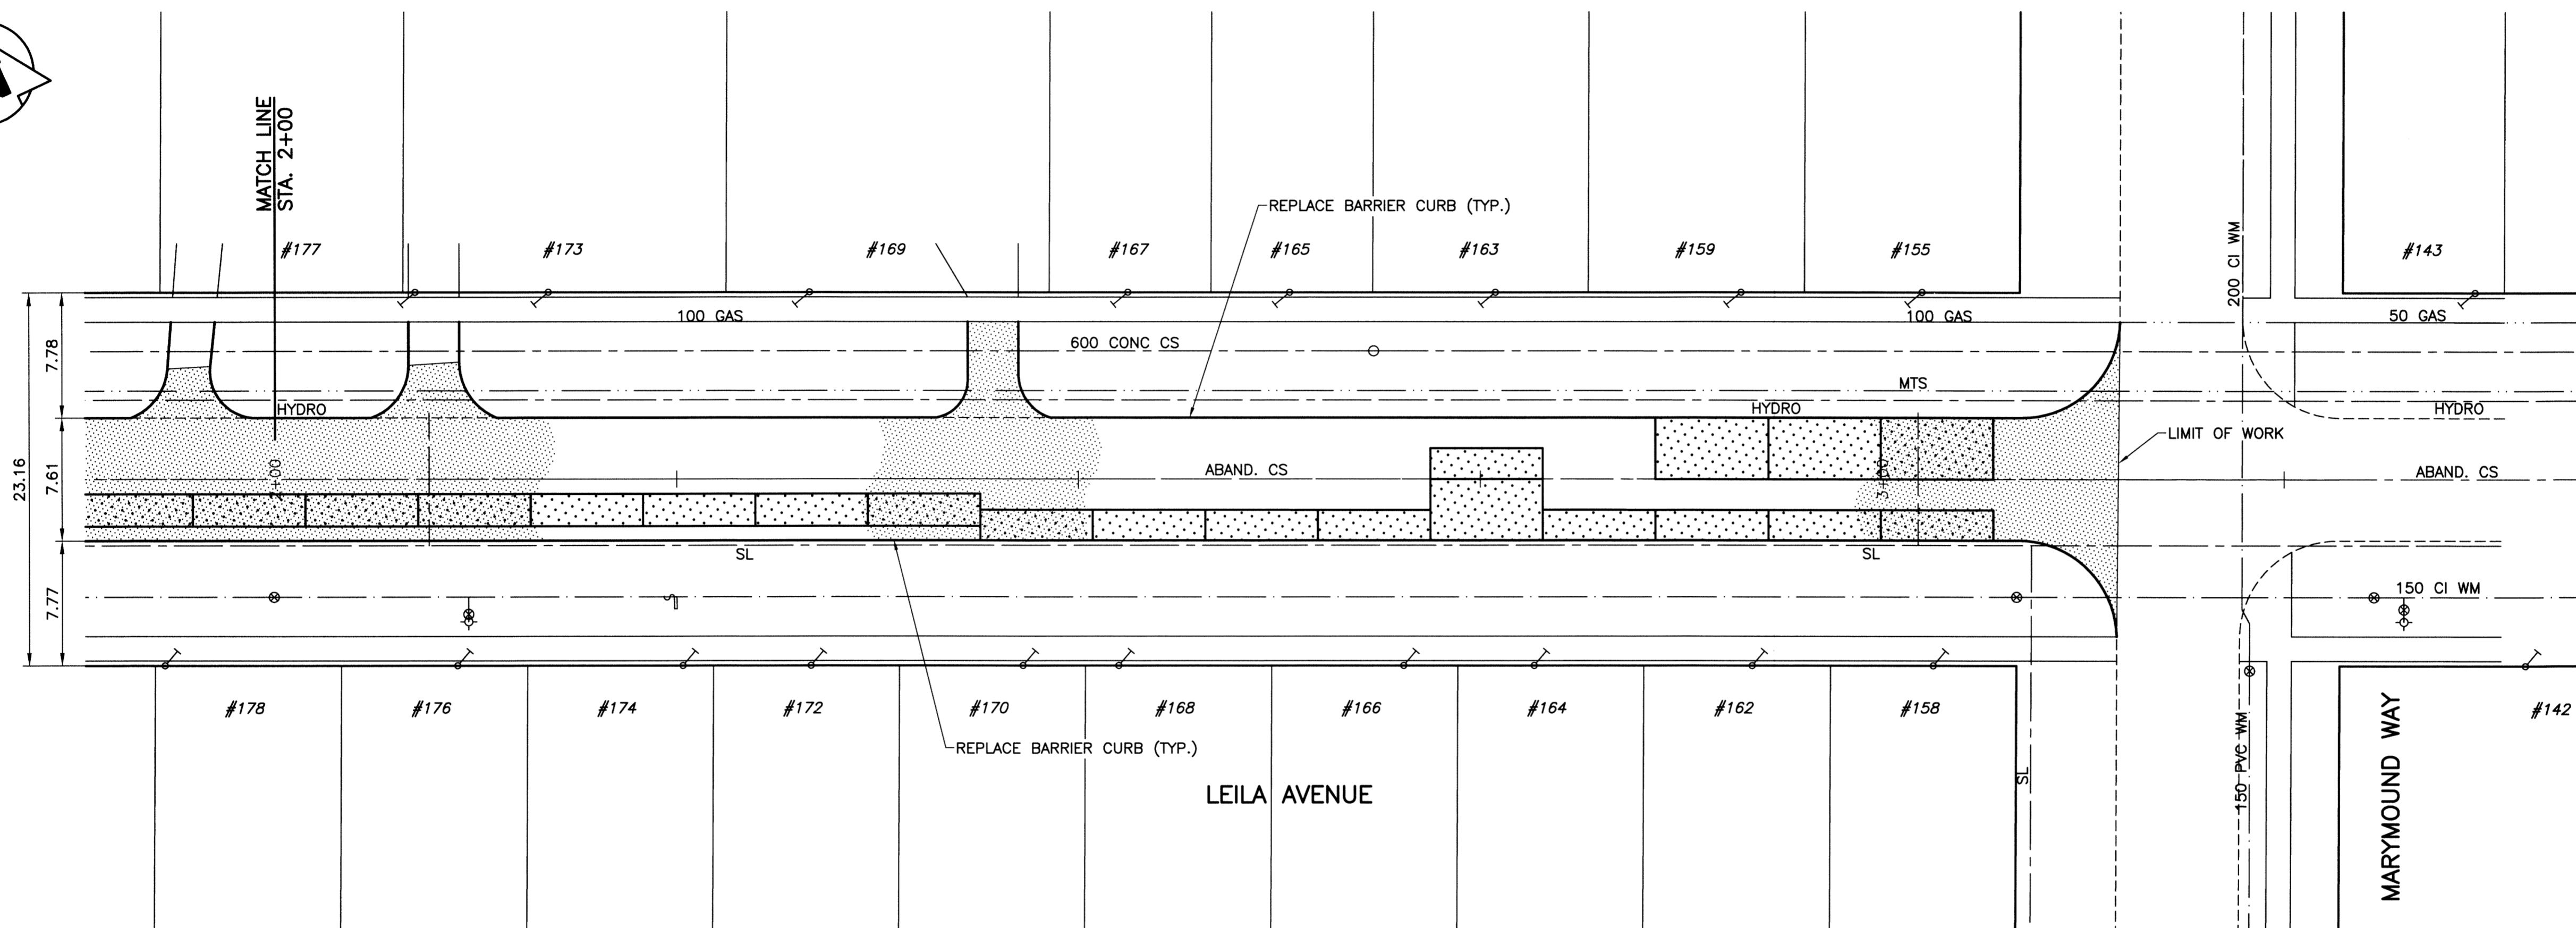

PLAN

SCALE: 1:250

WARNING


NOTIFY THE GAS COMPANY OF THE PROPOSED LOCATION OF EXCAVATION. TAKE PRECAUTION TO AVOID DAMAGE TO GAS COMPANY INSTALLATIONS. SEE PROVINCIAL REGULATION 210/72 FOR DETAILS.

METRIC

WHOLE NUMBERS INDICATE MILLIMETRES
DECIMALIZED NUMBERS INDICATE METRES

PROPERTY LIMITS DELINEATION

DELINEATION OF PROPERTY LIMITS AS SHOWN ON THIS DWG DOES NOT REPRESENT A "LEGAL SURVEY". KGS GROUP MAKES NO REPRESENTATION OR WARRANTY AS TO THE ACCURACY OF PROPERTY LIMITS DELINEATED ON THIS DWG, NOR ON THE DIMENSIONAL ACCURACY OF DWG FEATURES RELATIVE TO THOSE PROPERTY LIMITS.



300 LBS	LAND DRAINAGE SEWER	300 LBS					
250 WWS	WASTE WATER SEWER	250 WWS	+	TEST HOLE			
	GAS		—	GUY WIRE			
	HYDRO		—	LIGHT STANDARD			
	M.T.S.		—	BACK OF CURB			
150 WM	WATERMAIN	150 WM	—	CONCRETE			
	HYDRANT		+	ASPHALT			
	VALVE		+	SIDEWALK			
	MANHOLE		•	PROPERTY LINE			
	CATCH BASIN		+	SURVEY BAR			
	CURB INLET		▼	GEODETIC BENCHMARK			
	POLES		•	ELEVATION	231.334	(32.231)	TTTTT
EXISTING	LEGEND-PLAN	PROPOSED	EXISTING	LEGEND-PLAN	PROPOSED	EXISTING	LEGEND-PROFILE

LOCATION APPROVED UNDERGROUND STRUCTURES

SUPV. U/G STRUCTURES COMMITTEE DATE

NOTE: LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.

B.M.	13-21	S.E. Cor. Main St. & Leila Ave., 10m. in N. Conc. foundation of Bldg. on S.E. Cor. of Main St. & Leila Ave., 1m E. & 0.4m below brick of N.W. Cor. of Bldg.
ELEV.	231.078	
NO.	REVISIONS	DATE
0	ISSUED FOR TENDER	13/06/04

KGS GROUP CONSULTING ENGINEERS	
DESIGNED BY	BJM
CHECKED BY	CR
DRAWN BY	GEL
APPROVED BY	
HOR. SCALE:	1:250
VERTICAL:	—
RELEASED FOR CONSTRUCTION:	
DATE	13/05/13

ENGINEER'S SEAL

CONSULTANT DRAWING NO. 13-0107-004_C05

THE CITY OF WINNIPEG
PUBLIC WORKS DEPARTMENT
TRANSPORTATION ENGINEERING DIVISION

PROJECT TITLE: 2013 LOCAL STREET REHABILITATION PROGRAM
SHEET OF: 05 OF 16
COMPUTER FILE NAME: 13-0107-004_CALL
DRAWING NUMBER: C05

LEILA AVENUE
MAIN ST TO MARYMOUND WY
STA 2+00 TO MARYMOUND WY

P:\Projects\2013\13-0107-004\Doc\Control\Tobiasusue\DWG\13-0107-004_C05-Rev0.dwg - Tab: C05 Plotted By: Dderoch 06/04/2013 [Tue 11:12am] PLOT: 1:1 A-1