

**REFERENCE NOTES**

- A. PAVEMENT DIMENSIONS ARE TO BACK OF CURB
- B. BASELINE IS CENTRE LINE RIGHT-OF-WAY
- C. PROPERTY LINES OBTAINED FROM CITY OF WINNIPEG L.B.I.S., AND NO SCALE FACTOR WAS APPLIED
- D. REFER TO AECOM FIELD BOOK NO. 4793

**CONSTRUCTION NOTES**

1. PLACE NEW ASPHALTIC PAVEMENT TYPE 1A (AVERAGE THICKNESS 85mm)
2. REMOVE EXISTING CONCRETE PAVEMENT AND CONSTRUCT NEW 150mm REINFORCED CONCRETE PAVEMENT c/w 85mm ASPHALT OVERLAY
3. REMOVE EXISTING FRAME AND COVER AND INSTALL NEW FRAME AND COVER (AP-008/AP-009 AND OR AP-004/AP-005)
4. ADJUST EXISTING CATCH BASIN/CATCH PIT TO GRADE
5. CONSTRUCT NEW BARRIER CURB (75mm REVEAL HT. SEPARATE)
6. RENEW EXISTING BARRIER CURB (75mm REVEAL HT. DOWELLED)
7. REMOVE AND REINSTALL EXISTING PAVERS
8. ADJUST EXISTING CURB STOP
9. REMOVE EXISTING ASPHALT PAVEMENT



**METRIC**  
WHOLE NUMBERS INDICATE MILLIMETRES  
DECIMALIZED NUMBERS INDICATE METRES

EXISTING		PROPOSED		EXISTING		PROPOSED	
LEGEND - PLAN		LEGEND - PLAN		LEGEND - PROFILE		LEGEND - PROFILE	
	WATERMAIN		150 mm W.M.		HYDRO		150 mm W.M.
	HYDRANT		150 mm W.M.		NORTH/WEST GUTTER		150 mm W.M.
	VALVE		150 mm W.M.		SOUTH/EAST GUTTER		150 mm W.M.
	LAND DRAINAGE SEWER		300mm L.D.S.		N/W PROPERTY LINE		300mm L.D.S.
	WASTEWATER SEWER		250mm W.W.S.		S/E PROPERTY LINE		250mm W.W.S.
	MANHOLE		235.750		TREE		235.750
	CATCH BASIN		235.750		SIDEWALK RAMP		235.750
	CURB INLET		235.750		CONCRETE SIDEWALK		235.750
	JUNCTIONS		235.750		FENCE		235.750
	CULVERT		235.750				235.750
	GAS		235.750				235.750


**LOCATION APPROVED UNDERGROUND STRUCTURES**

SUPV. U/G STRUCTURES COMMITTEE DATE

**NOTE:**  
LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE. BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.

B.M. 84R689	S.W. Cor. Meadowood Dr. & W. leg of Woodford Bay, Tblt. 7.5m N. of S.L. Meadowood Dr. & 6m E. of W.L. W. leg Woodford Bay	ELEV. 231.858
0	ISSUED FOR TENDER	06/20/2013 BC
A	ISSUED FOR REVIEW	06/10/2013 BC
NO.	REVISIONS	DATE BY

<b>AECOM</b>	
DESIGNED BY	BC
CHECKED BY	KWR
DRAWN BY	SS/RT
APPROVED BY	
HOR. SCALE:	1:250
VERTICAL:	1:10
RELEASED FOR CONSTRUCTION BY:	
DATE	JUNE 14/13

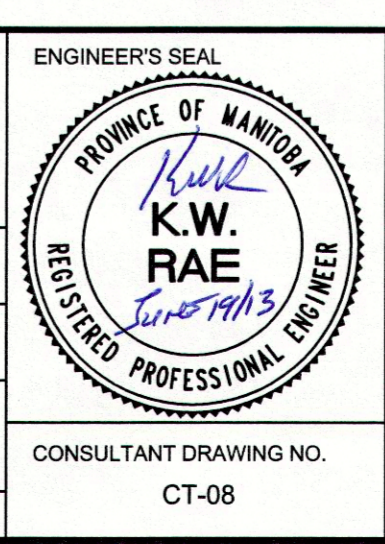

**THE CITY OF WINNIPEG**  
PUBLIC WORKS DEPARTMENT  
ENGINEERING DIVISION

2013 LOCAL STREET RENEWAL PROGRAM

LODGEPINE BAY PAVEMENT REHABILITATION  
MEADOWOOD DRIVE TO MEADOWOOD DRIVE

CITY DRAWING NUMBER  
SHEET 8 OF 17

CONSULTANT DRAWING NO. CT-08