



MOTOR ROOM



PUMP ROOM



PUMP ROOM



COMMINUTOR CHAMBER GATE VALVE

GENERAL NOTES:

1. PHOTOS SHOWN FOR CLARITY. UNLESS OTHERWISE SPECIFIED, REMOVE ALL EXISTING DUCTWORK, FANS, LOUVRES, GRILLES, AND ALL OTHER ASSOCIATED DUCTWORK ACCESSORIES.
2. REMOVE ALL EXISTING DOMESTIC WATER PIPING AND ALL ASSOCIATED VALVES, FITTINGS, AND ACCESSORIES.
3. REMOVE ALL EXISTING PROCESS PIPING AND ALL ASSOCIATED VALVES, PUMPS, MOTORS, FITTINGS, AND ACCESSORIES.

DEMOLITION NOTES:


1. REMOVE DUCTING, HANGERS, AND SUPPORTS.
2. REMOVE SUMP PUMP PIPING. FROM PUMP ROOM SUMP TO DISCHARGE IN COMMUNOTOR CHAMBER.
3. REMOVE EXISTING PROCESS PIPING, VALVES, PUMPS AND CONCRETE SUPPORTS. REMOVE LEVEL SENSOR PIPES INTO WETWELL AND RELATED SIGHT GLASS. CAP HOLES.
4. REMOVE CONCRETE THRUST BLOCK AND IMBEDDED PIPING FLUSH WITH WALL. SEAL PIPE AT WALL AS PER STRUCTURAL DRAWINGS.
5. CORE OUT PIPING TO WET WELL. TYPICAL OF 3.
6. REMOVE 500mm EXISTING GATE VALVE, OPERATOR MECHANISM AND SHAFT. REMOVE INFILL CONCRETE AS REQUIRED.



SCALE: 1:40mm METRIC A1
1:80mm METRIC A3

METRIC

WHOLE NUMBERS INDICATE MILLIMETRES
DECIMALIZED NUMBERS INDICATE METRES

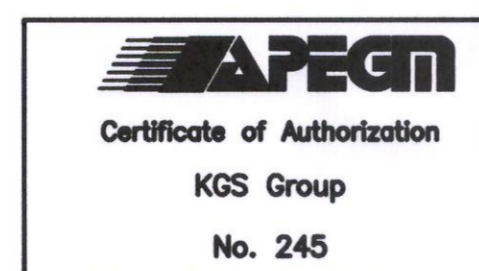

FIELD BOOK #:				ENGINEER'S SEAL	
POSTED TO LBIS					
DESIGNED BY	RED	CHECKED BY	<i>js</i>	RELEASED FOR CONSTRUCTION K. ZURIK	MO2
DRAWN BY	RP	APPROVED BY			
HDR. SCALE	AS NOTED	DATE	2013 07 24		
VERTICAL	AS NOTED	DATE	2014/06/16		
0 ISSUED FOR CONSTRUCTION	14/06/16	BY	<i>js</i>		
NO. REVISIONS	DATE	BY			

THE CITY OF WINNIPEG
 WATER AND WASTE DEPARTMENT
 AUBREY WASTEWATER PUMPING STATION UPGRADE
 1016 PALMERSTON AVE.
MECHANICAL
 DEMOLITION - MOTOR ROOM,
 PUMP ROOM & COMMINUTOR CHAMBER

SHEET 1 OF 1
 CITY DRAWING NUMBER
 1-0116L-M0002-001