

### LEGEND

- PROPERTY LINE
- EXISTING HYDRO LIGHT
- ORNAMENTAL PARK LIGHT
- PROPOSED FLOOD LIGHT
- REINFORCED CONCRETE SIDEWALK
- COLORED CONCRETE SIDEWALK
- REINFORCED CONCRETE PAD
- PLANTING BED
- EXISTING TREES TO REMAIN

- ### GENERAL NOTES
1. ALL DIMENSIONS SHOWN IN METRIC UNITS. NUMBERS WITH DECIMALS INDICATE METERS. WHOLE NUMBERS INDICATE MILLIMETERS.
  2. CONTRACTOR TO CONFIRM ALL DIMENSIONS AND REPORT ANY DISCREPANCIES TO CONTRACT ADMINISTRATOR AND CITY OF WINNIPEG PRIOR TO CONSTRUCTION.
  3. LAYOUT TO BE APPROVED BY CONTRACT ADMINISTRATOR AND CITY OF WINNIPEG PRIOR TO ANY CONSTRUCTION OR REMOVALS.
  4. THE CONTRACTOR IS RESPONSIBLE FOR ALL EXCAVATIONS, REMOVALS, DISPOSALS, AND ROUGH GRADING AS REQUIRED TO CONSTRUCT ALL WORKS AS SHOWN ON ALL PLANS, DETAILS AND SPECIFICATIONS. ALL ITEMS TO BE REMOVED MUST BE DISPOSED OF LEGALLY OFF SITE. ALL REUSABLE PAVING STONE TO BE STOCKPILED FOR REINSTALLATION. DISPOSE OF EXCESS AND UNSUITABLE MATERIAL. SAWCUT EXISTING PAVEMENT TO ENSURE CLEAN EDGE ON PAVEMENT TO REMAIN (NO BROKEN EDGES) REFER TO SURVEY FOR EXTENT OF REMOVALS.
  5. THE CONTRACTOR SHALL PROVIDE A QUALIFIED CREW TO LAYOUT SITE WORKS. THE CREW SHALL BE EQUIPPED WITH ALL THE NECESSARY EQUIPMENT TO PROVIDE HORIZONTAL AND VERTICAL LAYOUT IN ACCORDANCE WITH THE PLANS AND SPECIFICATIONS.
  6. REFER ALSO TO WRITTEN SPECIFICATIONS.
  7. EXISTING BENCHES, GARBAGE RECEPTACLES, NEWSPAPER BOXES, AND MAIL BOXES TO BE TEMPORARILY RELOCATED BY CONTRACTOR. CONTRACTOR TO COORDINATE WITH RESPECTIVE PARTIES AS REQUIRED.
  8. LOCATION OF ALL UTILITIES SHOWN FOR ILLUSTRATION ONLY. CONTRACTOR MUST CONTACT ALL UTILITIES REGARDING RULES FOR WORKING IN THE AREA OF THE UTILITIES PRIOR TO COMMENCEMENT OF ANY WORK. CONTRACTOR MUST CONFIRM LOCATION OF ALL UTILITIES PRIOR TO CONSTRUCTION.
  9. CONTRACTOR TO ADJUST GRADES OF ALL SERVICES AS REQUIRED TO BRING FLUSH TO NEW FINISH GRADE. REFER TO ENGINEER'S DRAWINGS AND SPECIFICATIONS FOR ALL MANHOLE CATCH BASINS, FIRE HYDRANT, CURB STOPS, ETC. REMOVALS, RELOCATIONS AND ADJUSTMENTS.
  10. CONTRACTOR TO SUPPLY AND INSTALL SQUARE CONCRETE COLLARS FOR ALL SURFACE UTILITIES IN SIDEWALK. WHERE COLLAR EXTENDS INTO PAVING BANDS CONTRACTOR TO ENSURE CONCRETE EXTENDS TO NEAREST LINE OF PAVER.
  11. DURING CONSTRUCTION, CONTRACTOR TO PROTECT TO CITY OF WINNIPEG STANDARDS ALL EXISTING TREES, SIDEWALKS, CURBS, SOD, UTILITIES, AND PAVING TO REMAIN. CONTRACTOR TO REPAIR ALL ON AND OFF SITE SODDED AREAS, SHRUB BEDS, TREES, CONCRETE, ROAD PAVING AND CURBS ETC., DAMAGED DURING CONSTRUCTION TO ENGINEER'S SATISFACTION AND TO THE CITY OF WINNIPEG STANDARDS AT THEIR OWN COST.
  12. ALL WORK TO BE DONE IN ACCORDANCE WITH CITY OF WINNIPEG STANDARD CONSTRUCTION SPECIFICATIONS UNLESS OTHERWISE NOTED.
  13. REFER TO ELECTRICAL DRAWINGS FOR LOCATION AND DETAILS FOR ALL SITE LIGHTING, POWER OUTLETS, ETC.

**8** SUPPLY AND INSTALL LIGHT POLE AND LUMINAIRE ON STANDARD CONCRETE BASE AS PER DETAIL. REFER ALSO TO ELECTRICAL PLAN (TYP)

SUPPLY AND INSTALL 1.8m FM138 VICTOR STANLEY FRAMERS MODERN STYLE BENCH C/W IPE WOOD SLATS, BACK WITH ARMRESTS, SURFACE MOUNT

SUPPLY AND INSTALL PLANTING BED

EXISTING BUS STOP  
PROVENCHEUR BLVD

EXISTING TREE TO REMAIN, PROTECT DURING CONSTRUCTION  
REMOVE & DISPOSE OF EXISTING SIGN, CONCRETE BASE AND DISCONNECT ELECTRICAL

REMOVE EXISTING BENCH AND CONCRETE BASE. DELIVER BENCH TO CITY OF WINNIPEG.

SUPPLY AND INSTALL ENTRANCE KIOSK ON CONCRETE BASE AS PER DETAIL **4** L3.2

SUPPLY AND INSTALL REINFORCED CONCRETE SIDEWALK AS PER DETAIL **1** L3.1

SUPPLY AND INSTALL COLORED REINFORCED CONCRETE SIDEWALK AS PER DETAIL **5** L3.1

SUPPLY AND INSTALL UNIT PAVERS ON CONCRETE SIDEWALK BASE (HOLLAND, SAILOR COURSE, DESERT BUFF) AS PER DETAIL **4** L3.1

SUPPLY AND INSTALL CIP CONCRETE BASE AND ORNAMENTAL PILE CAPS FOR FUTURE CANOPY STRUCTURE AS PER DETAIL **2** L3.2

FUTURE CANOPY STRUCTURE BY OTHERS. NOT IN CONTRACT.

REMOVE & DISPOSE OF EXISTING TREE

EXISTING TREE TO REMAIN, PROTECT DURING CONSTRUCTION

SUPPLY & INSTALL PLANTING BED C/W GOUTWEED PLANTING. PROTECT EXISTING ROOT STRUCTURE DURING CONSTRUCTION.

REMOVE EXISTING SIGN AND DELIVER TO CITY OF WINNIPEG

REMOVE & DISPOSE OF EXISTING PLANT MATERIAL WITHIN LIMIT OF PROPOSED PLAZA EXCEPT WHERE NOTED OTHERWISE

SUPPLY AND INSTALL LIGHT POLE AND LUMINAIRE ON STANDARD CONCRETE BASE AS PER DETAIL. REFER ALSO TO ELECTRICAL PLAN (TYP) **8** L3.1



### PLANT LIST

KEY	QTY.	COMMON NAME/BOTANICAL NAME	SIZE	REMARKS
<b>CONIFEROUS TREES</b>				
A	92	EXCALIBUR LUNGWORT / PULMONARIA 'EXCALIBUR'	2.1m ht.	SPECIMEN, W.B. MACHINE DUG WITH SINGLE UPRIGHT LEADER, STRAIGHT TRUNK, WELL BRANCHED, FULL FORM

No.	Revisions	Date	By
24-04-14	1:100		
Design By	Drawn By	Checked By	
AH	MD	SR	

**McGOWAN • RUSSELL**  
Client

**CITY OF WINNIPEG**  
Project Title  
**PROVENCHEUR PARK UPGRADES**

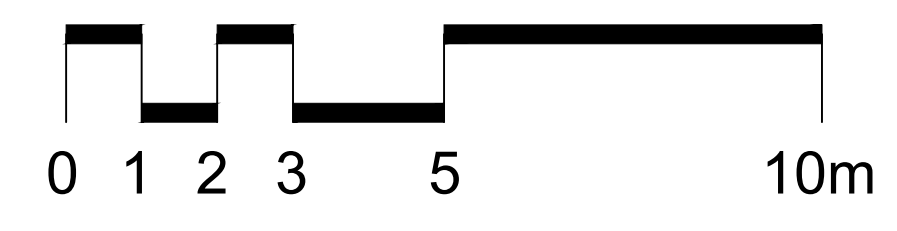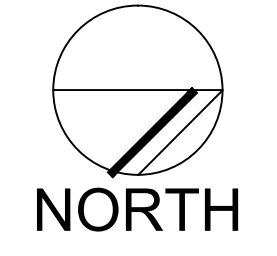

Sheet Title  
**PLAZA LAYOUT**  
Project No. **13-031** Drawing No. **L1.1**