



NESS AVE EASTBOUND

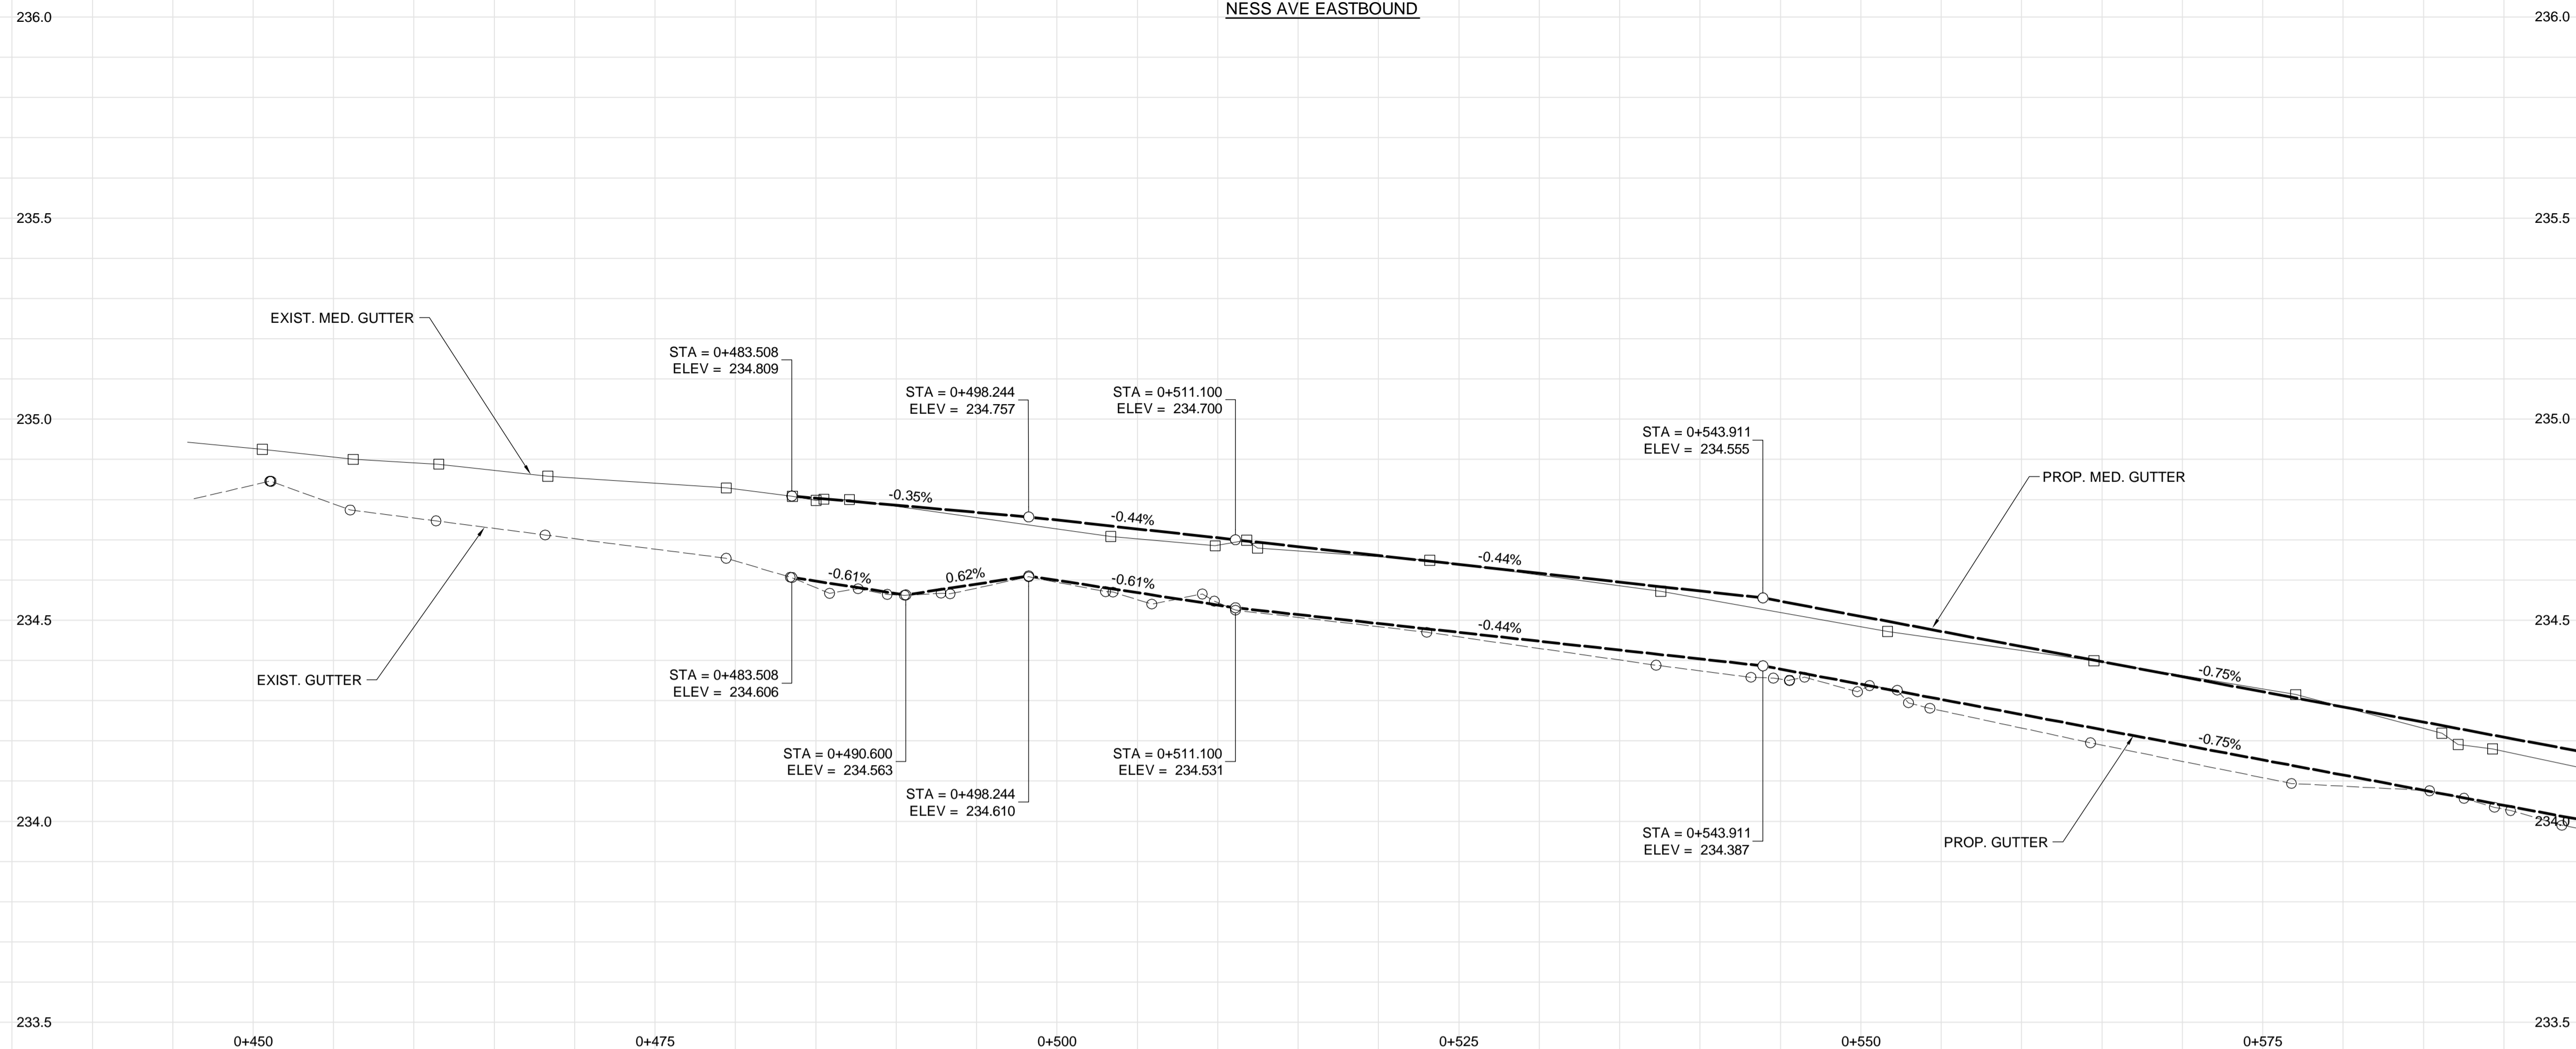

- CONSTRUCTION NOTES:**
1. ALL DIMENSIONS ARE TO BACK OF CURB.
 2. ISOLATE MISCELLANEOUS ITEMS IN NEW CONCRETE WORKS AS PER SD-228C OR DETAIL 2 IF ALIGNED WITH PAVING BAND.
 3. LEGAL PLAN AND UNDERGROUND INFORMATION FROM CITY OF WINNIPEG LBIS. CONTRACTOR TO VERIFY ALL UNDERGROUNDS IN THE FIELD.
 4. CONTRACTOR TO TAKE PRECAUTIONARY STEPS TO AVOID DAMAGE FROM CONSTRUCTION ACTIVITIES TO TREES WITHIN THE LIMITS OF CONSTRUCTION.
 5. LOCATION OF EXISTING SERVICES TO BE CONFIRMED IN THE FIELD BY THE CONTRACTOR.
 6. INSTALL CB LEADS AT MIN. 1.0% SLOPE OR AS DIRECTED BY CONTRACT ADMINISTRATOR.
 7. LIMITS OF SIDEWALK RENEWAL TO BE FINALIZED IN THE FIELD BY THE CONTRACT ADMINISTRATOR.
 8. LIMITS OF BOULEVARD GRADING TO BE FINALIZED IN THE FIELD BY THE CONTRACT ADMINISTRATOR.
 9. MONOLITHIC CURB AND SIDEWALK SP-228B REVEAL HEIGHT IS 150 mm UNLESS OTHERWISE DIRECTED BY THE CONTRACT ADMINISTRATOR.
 10. SEE SHEET 14 FOR TYPICAL CROSS SECTIONS AND DETAILS.
 11. PLANE EXISTING ASPHALT OVERLAY WITHIN LIMITS OF CONSTRUCTION TO DEPTH INDICATED BY THE CONTRACT ADMINISTRATOR.
 12. ADJUST ALL WATER VALVES, MANHOLES, AND DRAINAGE INLETS WITHIN LIMITS OF CONSTRUCTION.

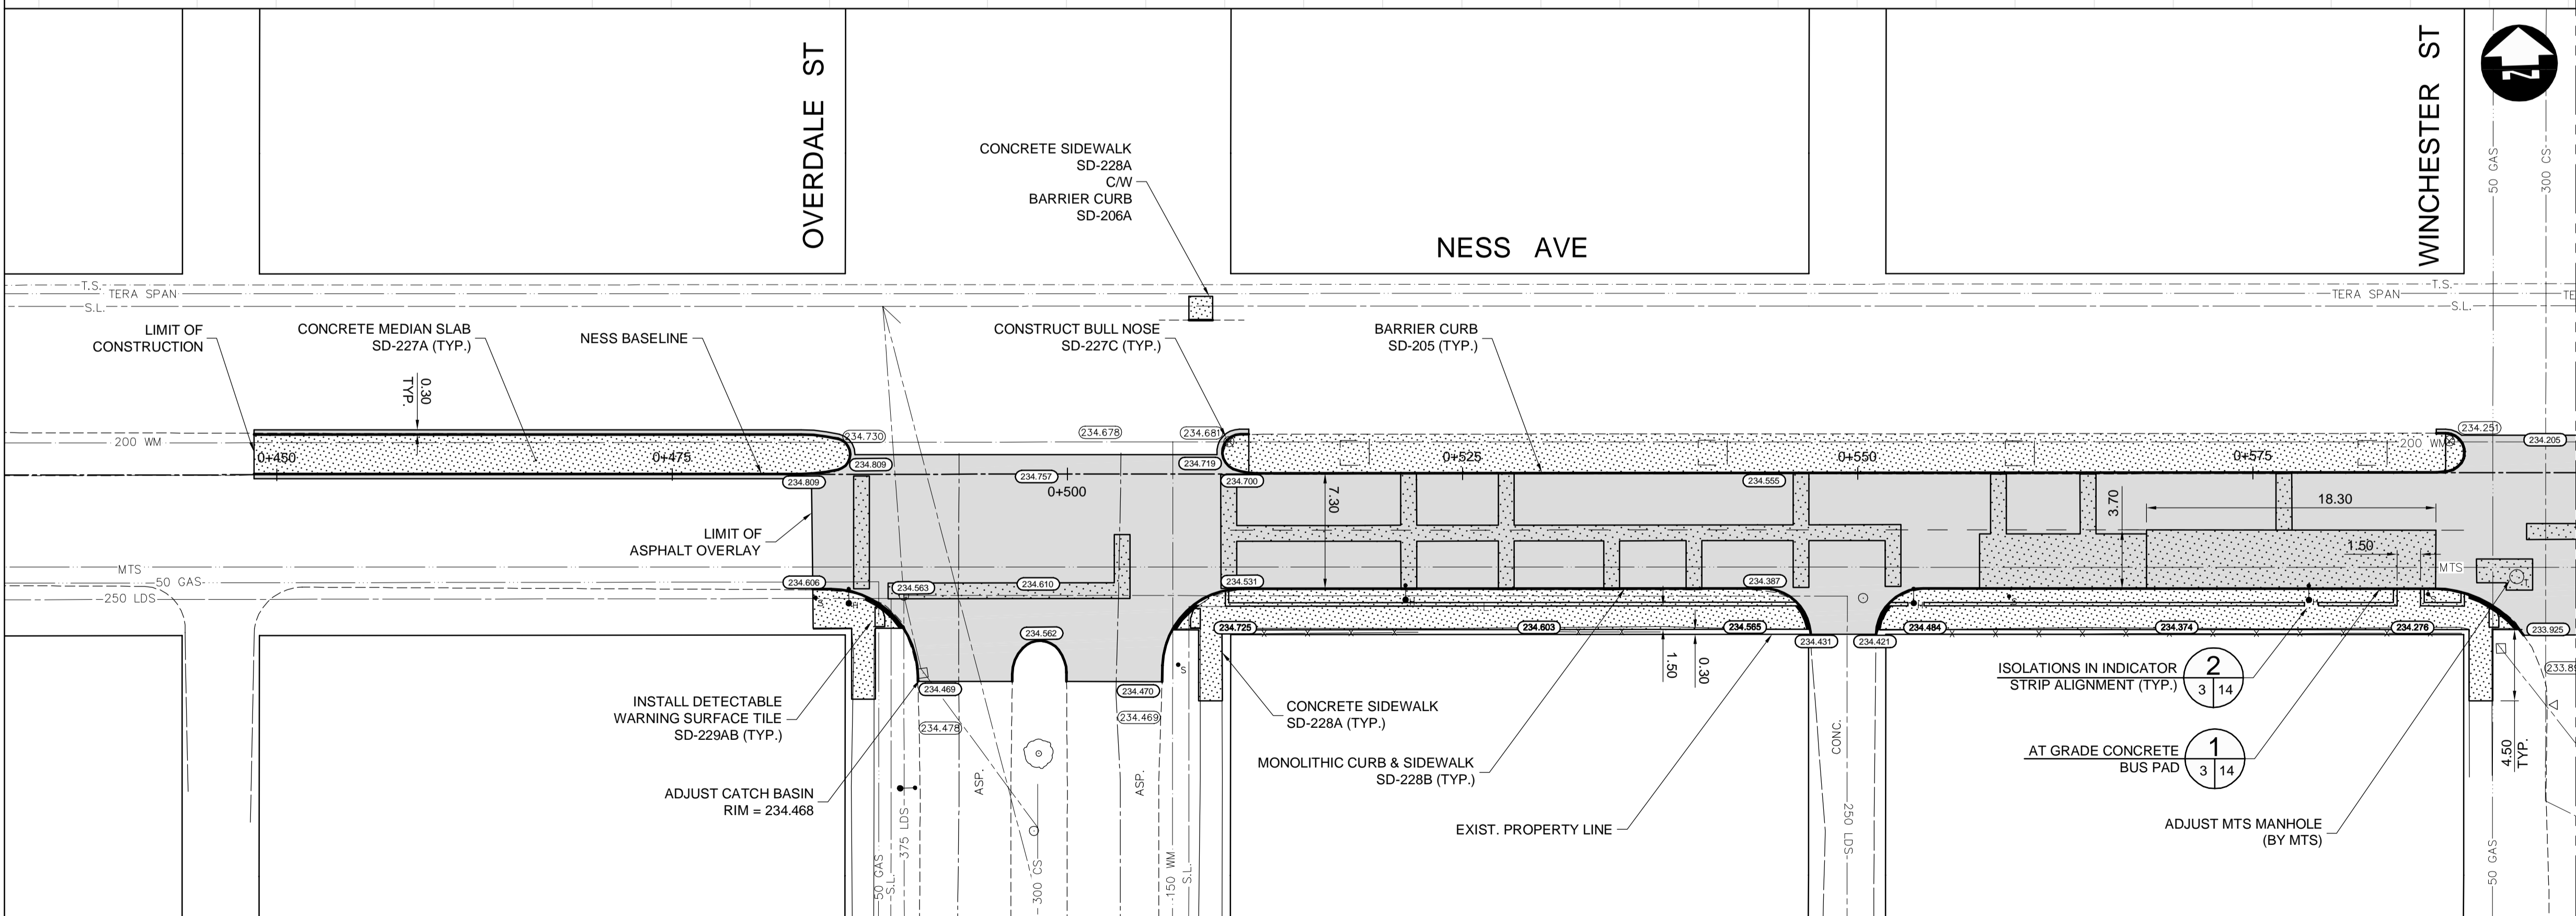

METRIC
WHOLE NUMBERS INDICATE MILLIMETRES
DECIMALIZED NUMBERS INDICATE METRES

- WARNING**
IF POWER EQUIPMENT OR EXPLOSIVES USED FOR EXCAVATION ON THIS PROJECT THE CONTRACTOR:
1. NOTIFY THE GAS COMPANY OF THE PROPOSED LOCATION OF EXCAVATION.
 2. TAKE PRECAUTION TO AVOID DAMAGE TO GAS COMPANY INSTALLATIONS SEE PROVINCIAL REGULATION 210/72 FOR DETAILS.
 3. OBTAIN EXCAVATION PERMITS PRIOR TO CONSTRUCTION.

APEGM
Certificate of Authorization
Dillon Consulting Limited (MB)
No. 1789 Date: 01/12/2015

150 WM	WATERMAIN	150 WM	HYDRO	HYDRO	HYDRO	150 WM	WATERMAIN	150 WM	UNDERGROUND STRUCTURES
300 LDS	HYDRANT VALVE	300 LDS	MTS	MTS	300 LDS	300 LDS	HYDRANT VALVE	300 LDS	CONC.
250 WWS	LAND DRAINAGE SEWER	250 WWS	CONCRETE	CONCRETE	250 WWS	250 WWS	WASTE WATER SEWER	250 WWS	CONC.
100 GAS	WASTE WATER SEWER	100 GAS	ASPHALT	ASPHALT	100 GAS	100 GAS	PLANING	100 GAS	CONC.
	MANHOLE		SIDEWALK	SIDEWALK			PROPERTY LINE		CONC.
	CATCH BASIN		PAVING STONES	PAVING STONES			ADJUST CATCH BASIN		CONC.
	CURB INLET		PARTIAL DEPTH REPAIR	PARTIAL DEPTH REPAIR			RIM = 234.468		CONC.
	JUNCTIONS		PROPERTY LINE	PROPERTY LINE					CONC.
	CULVERT		DRAINAGE ARROW	DRAINAGE ARROW					CONC.
	GAS		CURB RAMP	CURB RAMP					CONC.
	EXISTING		SPOT GRADE	SPOT GRADE					CONC.
	LEGEND-PLAN		LEGEND-PROFILE	LEGEND-PROFILE					CONC.
	PROPOSED		PROPOSED	PROPOSED					CONC.
	EXISTING		EXISTING	EXISTING					CONC.

DESIGNED BY	PMW	DATE	01/12/15	BY	DBW
DRAWN BY	PMW	DATE	01/12/15	BY	DBW
CHECKED BY	TS	DATE	01/12/15	BY	DBW
APPROVED BY	DBW	DATE	01/12/15	BY	DBW
HOR. SCALE	1:250	DATE	01/12/15	BY	DBW
VERTICAL	1:10	DATE	01/12/15	BY	DBW
ISSUED FOR TENDER	01/12/15	DATE	01/12/15	BY	DBW
NO. REVISIONS		DATE		BY	

DILLON CONSULTING

RELEASED FOR CONSTRUCTION CONSTRUCTION

CONSULTANT PROJECT NUMBER
15-1674

THE CITY OF WINNIPEG
PUBLIC WORKS DEPARTMENT

NESS AVE E/B REHABILITATION
OVERDALE ST TO QUEEN ST

PLAN-PROFILE
STA: 0+430 TO 0+595

CITY DRAWING NUMBER
P-3465-3

SHEET **3** OF **17**

CONSULTANT DRAWING NUMBER

G:\CAD\151674\Drawings and Figures\Contract\151674-01-COIN-C-PLAN-PROFILE-NESS.dwg