

# APPENDIX 1



The Delviro Energy series of LED luminaires was designed and built with high performance, efficiency, and cost-effectiveness in mind. Delviro Energy products provide higher efficacy, longer lifetime, and more reliable light than conventional lighting products. Our fixtures have been designed and built to exceed the performance of CFL and HID light sources while using less power. Our proprietary board designs are extremely well-equipped for all types of light-on-demand applications. Unlike traditional CFL and HID luminaires, Delviro Energy products can be instantaneously and smoothly dimmed without affecting the life of the fixture. Delviro Energy fixtures are solid state solutions for the commercial and industrial lighting markets.

ZOOM LIGHT LED  
 FIXTURE SPECIFICATION  
 BID OPP# 865-2015  
 999 SARGENT AVENUE  
 GYM LIGHTING UPGRADE

Project: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 Product: \_\_\_\_\_

**ZOOMLIGHT-120-4K-U-22C-ODW-H-D-DCL**

ZOOM LIGHT LED

## ZOOM LIGHT LED



### SPECIFICATIONS/FEATURES

- Retail Lighting fixture.
- Up to 17,760 lumens.
- Up to 130 lm per watt efficiency.
- Color Temp: 3000K, 3500K, 4000K, 5000K
- 120/277 or 347/480 VAC
- 0-10V dimming included
- Optional 93 CRI.
- 150,000+ life hours (L70).
- Proprietary LED Board Design for uniform power and full lifespan.

**10 Year Warranty**

**MADE IN CANADA**

#### AVAILABLE SIZES:


- 16" clear, 16" aluminum
- 22" clear, 22" aluminum



MODEL	LPW	ACTUAL INPUT WATTS	LUMENS	VOLTS
ZoomLight 70	129.4	65.9	8,527	120/277 347/480
ZoomLight 90	123.8	85.9	10,634	120/277 347/480
ZoomLight 120	125	115	14,375	120/277 347/480
ZoomLight 150	120	148	17,760	120/277 347/480

DLC Qualified: ZoomLight 70 and ZoomLight 90

### PHYSICAL DIMENSIONS

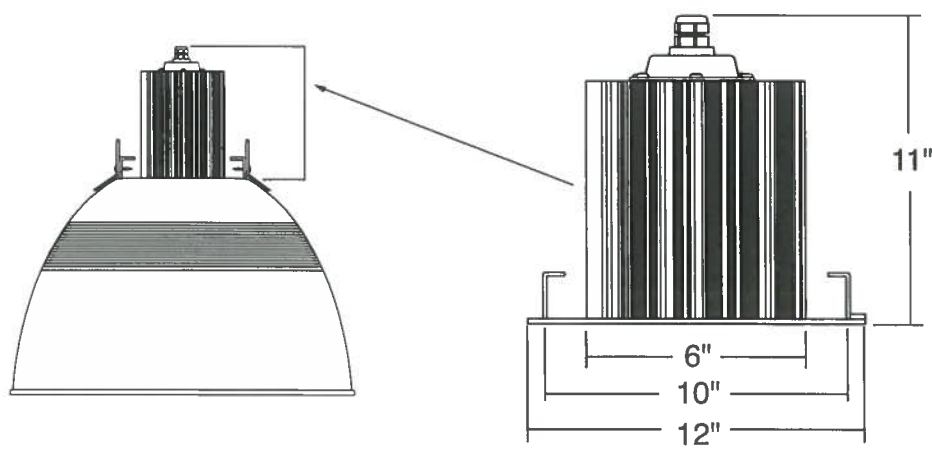


**delviro energy inc.**

# ZOOM LIGHT LED


## PHOTOMETRICS

ZoomLight 70W



ACROSS ———  
45 - - - - -  
ALONG - - - - -

ZoomLight 90W

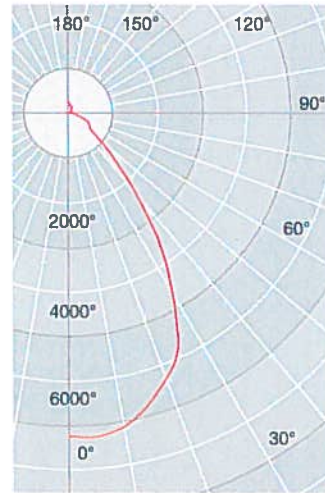

ACROSS ———  
45 - - - - -  
ALONG - - - - -

## ORDERING INFORMATION

Product	Watts	ColorTemp	Voltage	DomeType	Finish	Mounting	Accessories	Lens
ZoomLight	70	27K(2700)	U-120/277V	16C-16" clear	ODW-Base White	FM-Flush Mount	N-None	NL-No lens
	90	3K(3000)	347-347V	16A-16" Aluminum	NLW-SC White	H-Hooks	PS-PIR Sensor	DCL-Clear Diffused
	120	35K(3500)	H-347V/480V	22C-22" clear	CU-Custom	AC-Aircraft Cable	D-Dimming	
	150	4K(4000)		22A-22" Aluminum			WC-wireless Controls**	
		5K(5000)					BFC*	
		CK(Custom)					WFC*	

Sample Part Number: ZoomLight-70-5K-U-22C-ODW-H-N-DCL

\*\* must consult factory for settings

BFC\* - Black Flexible Cord - Variable lengths available

WFC\* - White Flexible Cord - Variable lengths available



delviro energy inc.