



- TIMING ROOM FRONT END EQUIPMENT:**
- COMMERCIAL RACK STYLE COMPUTER:**
- 3.4GHZ QUAD-CORE PROCESSOR
 - 16GB RAM
 - 3GB VIDEO CARD TO SUPPORT 6 DISPLAYS
 - CD/DVD DRIVE
 - 1 TB HARD DRIVE
 - QUAD - INPUT SERIAL CARD TO INTERFACE WITH TIMING SYSTEMS
 - 2 - 22" MONITORS
 - KEYBOARD AND MOUSE
 - FIBRE PATCH CONNECTORS
 - INTERNET ACCESS
- INPUT RACK:** 2 - SDI, 1 - DVI, 1 - HDMI
- OUTPUT RACK:** 2 - SDI, 1 - DVI, 1 - HDMI, 1 - RCA CONNECTION (TO BE CONNECTED TO EXISTING FACILITY PA SYSTEM)
- UPS UNIT**
- SOFTWARE:**
- SCHEDULER - DAILY, WEEKLY, MONTHLY LOOPS MADE UP OF PRE-RECORDED VIDEO, STILL SHOTS, TEXT, ETC.
 - EVENT FILE DISPLAY - TO ALLOW AN EVENT GROUP TO INSTALL SPONSOR ADS, PRE-RECORDED VIDEO, STILL SHOTS, TEXT, ETC FOR THEIR EVENT
 - INTERFACE WITH THE QUANTUM AND ARES 21 TIMING CONTROLLERS FOR SWIMMING AND WATER POLO
 - INTERFACE WITH DIVING AND SYNCHRO SWIMMING SPORTS
 - WARM UP COUNTDOWN CLOCK
 - INSTALL A SCALER TO ALLOW INTERFACE WITH BUILDING LCD SCREENS

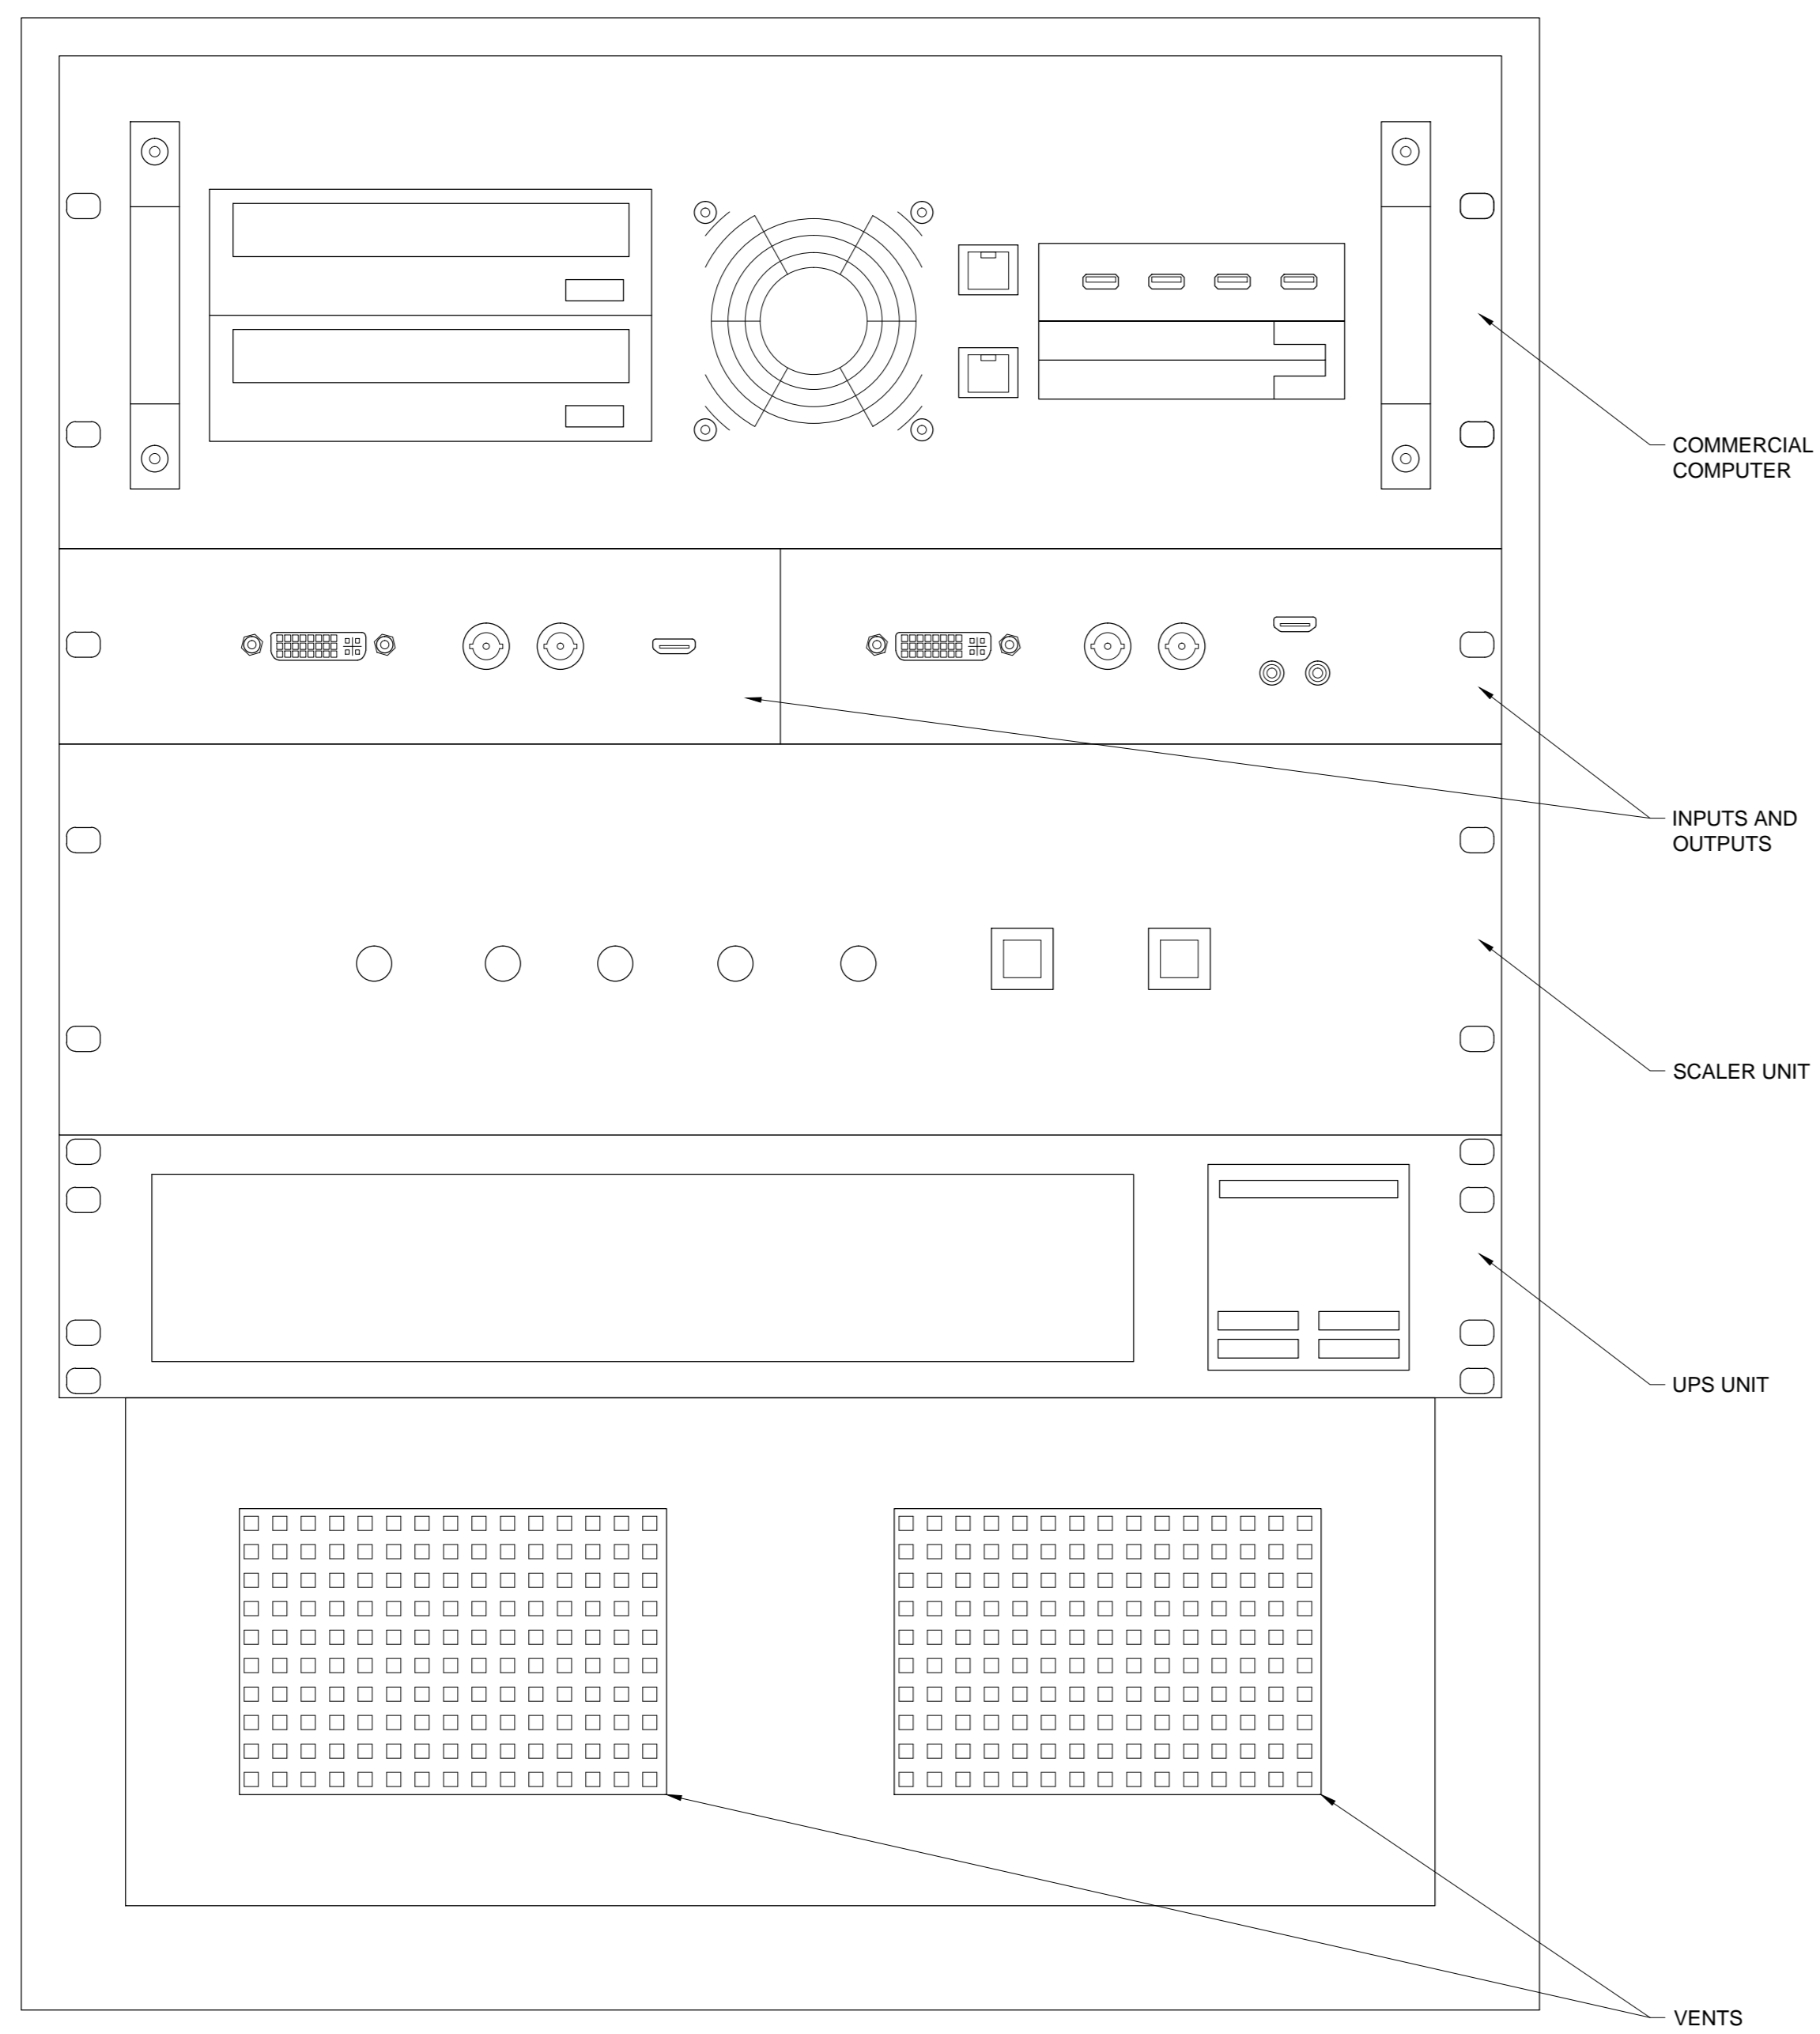


TYPICAL VIDEO RACK DETAIL 2 NOT TO SCALE AQ104

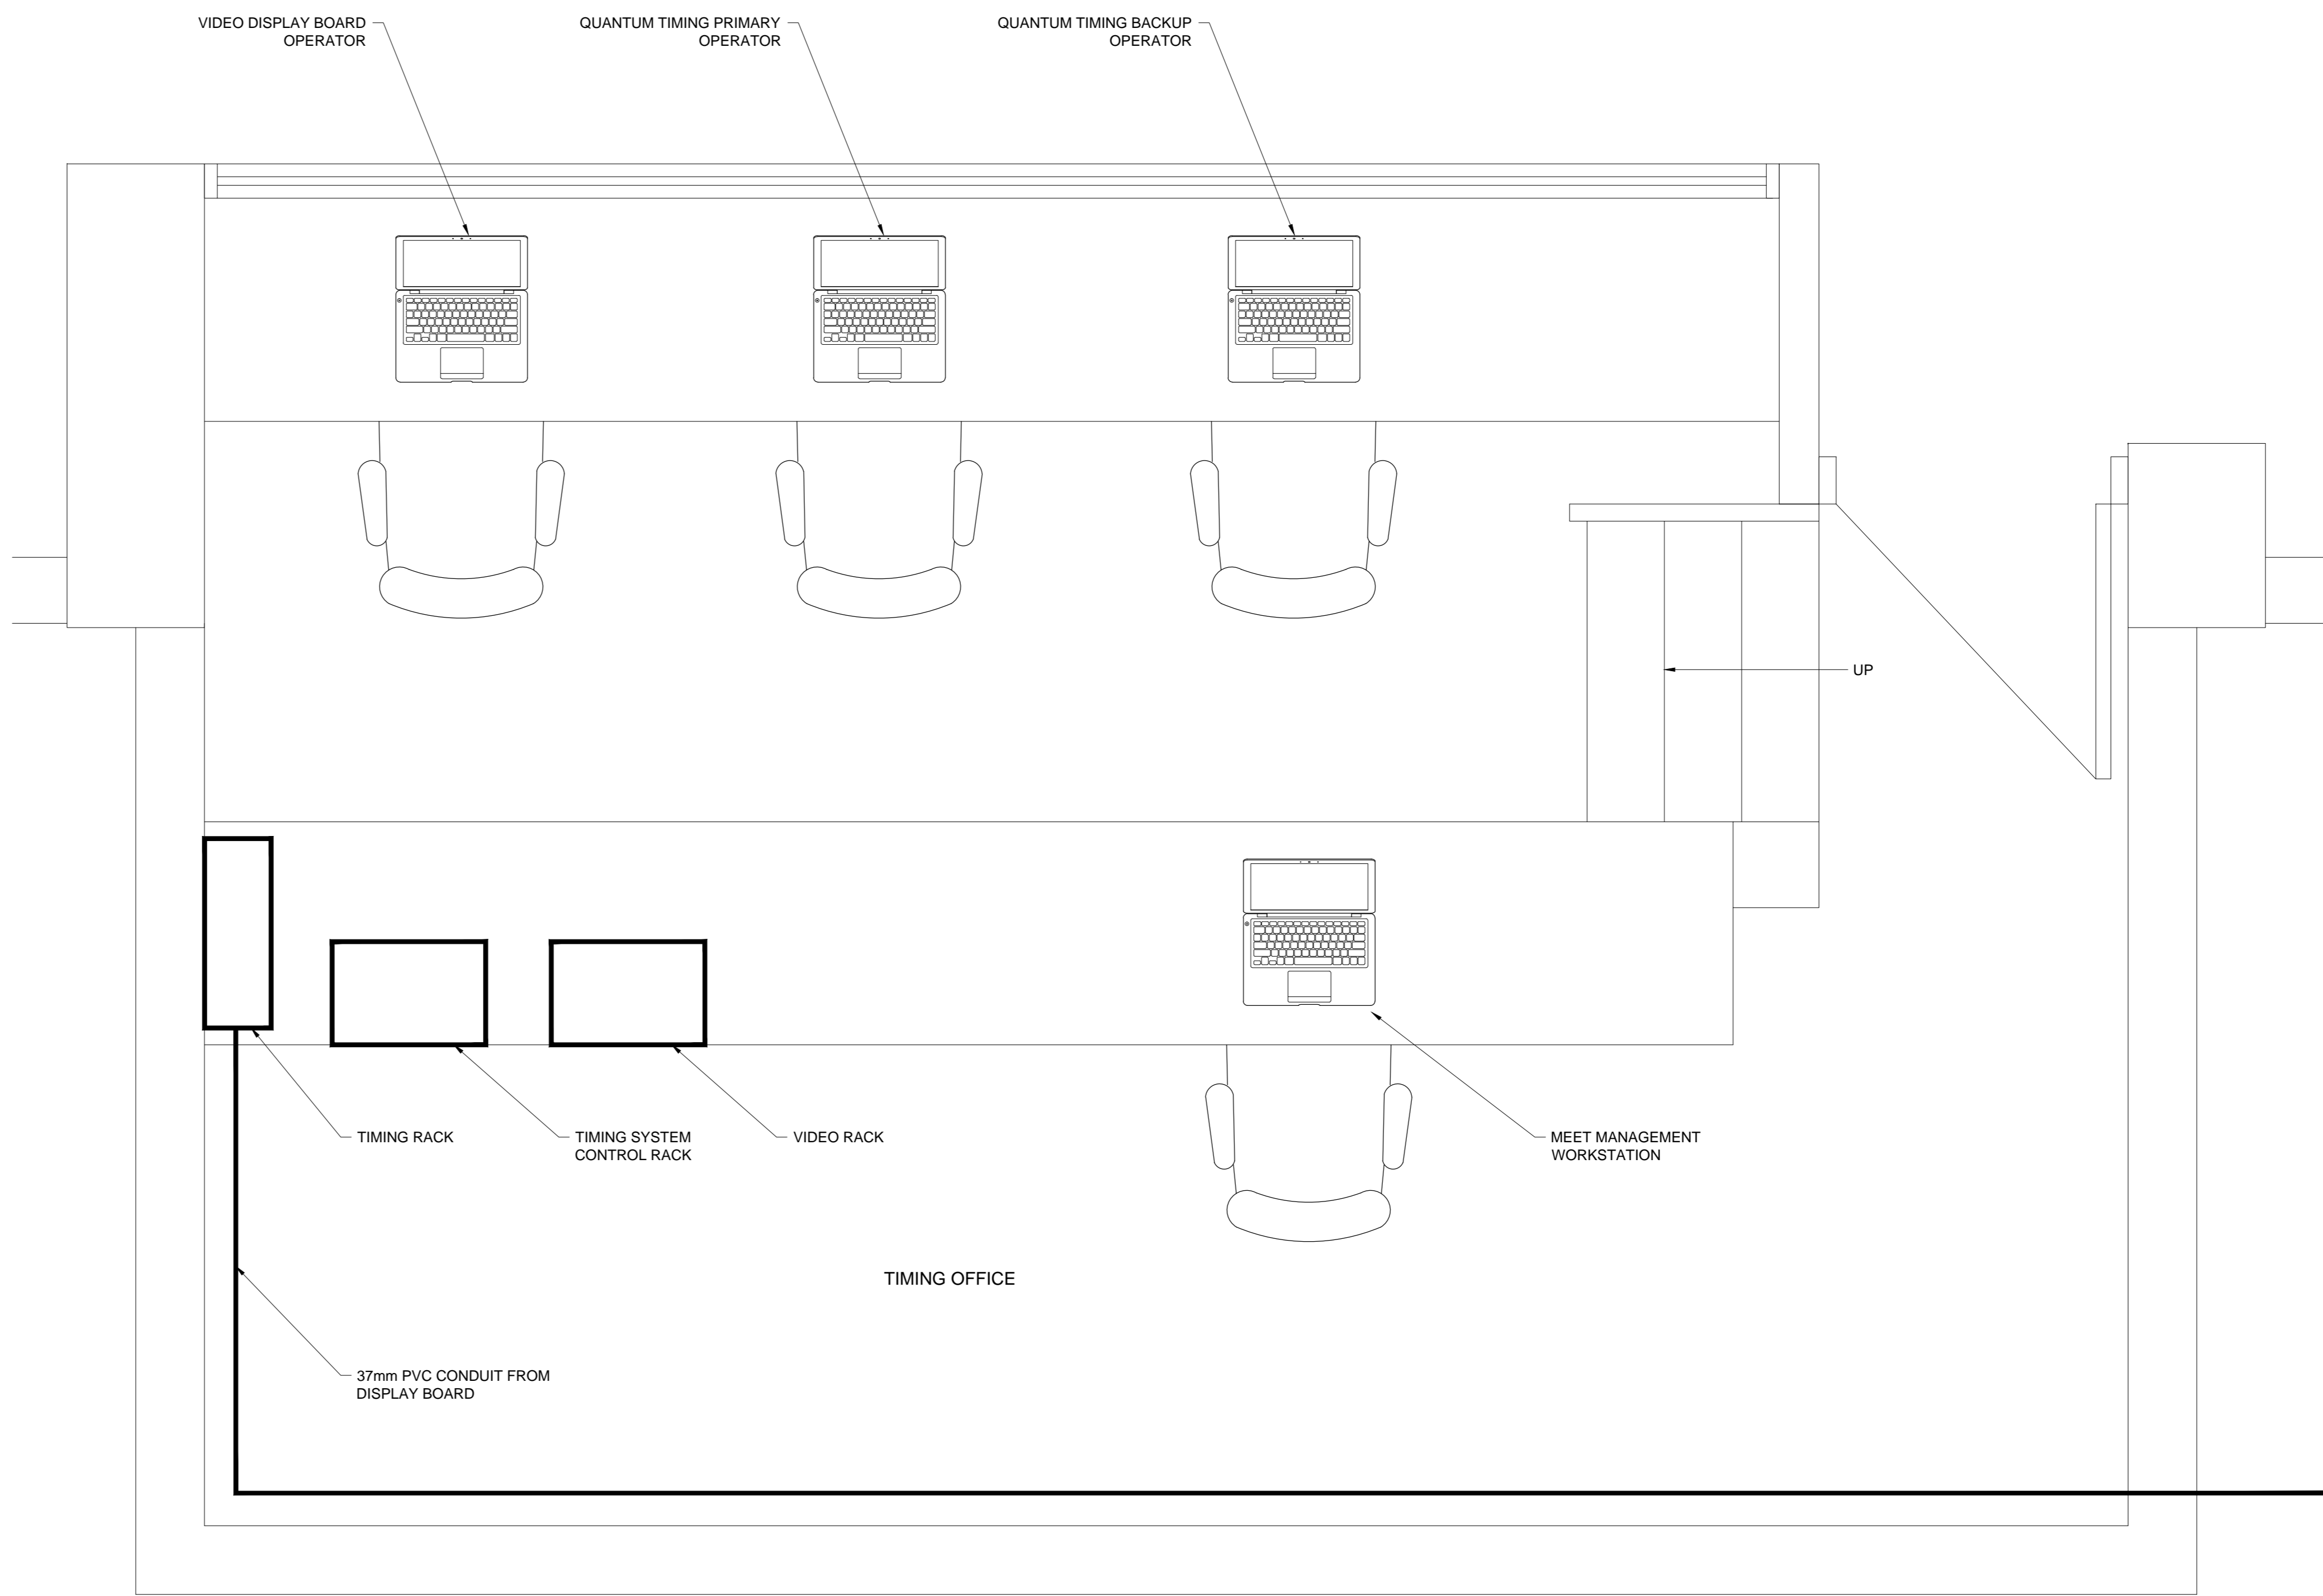


TIMING ROOM LAYOUT 1 1:125 AQ104



THIS DRAWING IS NOT TO BE SCALED.
REFER TO APPROPRIATE SAFETY, STRUCTURAL, MECHANICAL, ELECTRICAL, AND HVAC CODES AND REGULATIONS FOR CONSTRUCTION. CONSTRUCTION MUST CONFORM TO ALL APPLICABLE CODES AND REQUIREMENTS OF ALL APPLICABLE JURISDICTIONS.
THE CONTRACTOR SHALL VERIFY AND ACCEPT RESPONSIBILITY FOR ALL DIMENSIONS AND CONDITIONS ON SITE AND SHALL NOTIFY THE APPROPRIATE CONTRACT ADMINISTRATOR OF ANY VARIATIONS FROM THE SUPPLIED INFORMATION.

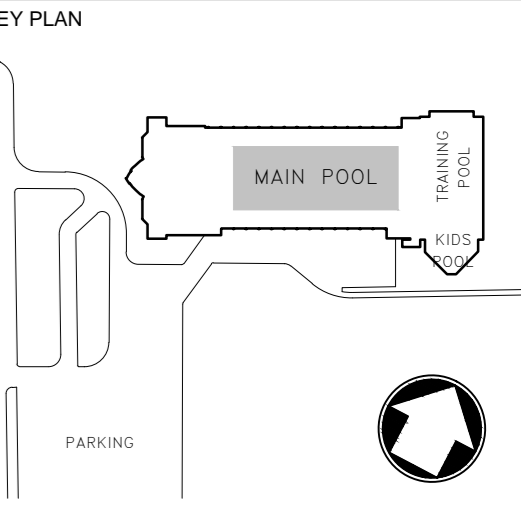

SEAL

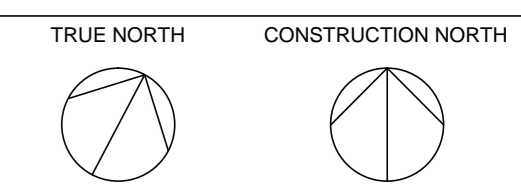

REVISIONS		
No.	DATE	DESCRIPTION

0 NOV. 18/16 ISSUED FOR BID
No. DATE DESCRIPTION
PROJECT: PAN AM POOL - WINNIPEG
VIDEO DISPLAY BOARD REPLACEMENT
ISSUED:
DRAWN BY: DJ REVIEWED BY: TH
DATE: OCT 2016 SCALE: AS NOTED
PROJECT NO: PAN-W-011-14
SHEET TITLE:

TIMING ROOM LAYOUT