


1 OUTDOOR HOCKEY RINK LAYOUT PLAN

1 : 200

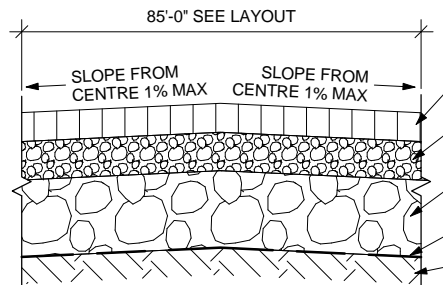

- 76mm (3") TYPE II ASPHALT PAVEMENT TO CW 3410 (NOT INSTALLED UNDER PLAYERS BOXES)
- 102mm (4") COMPACTED CRUSHED 3/4" DOWN LIMESTONE BASE COURSE TO CW 3110
- 203mm (8") COMPACTED CRUSHED 2" DOWN LIMESTONE SUB BASE TO CW 3110
- GEO-TEXTILE FABRIC UNDER PLAYERS BOX ONLY
- COMPACTED SUB-GRADE TO CW 3110

2 HOCKEY RINK PAVING SECTION

1 : 20

