
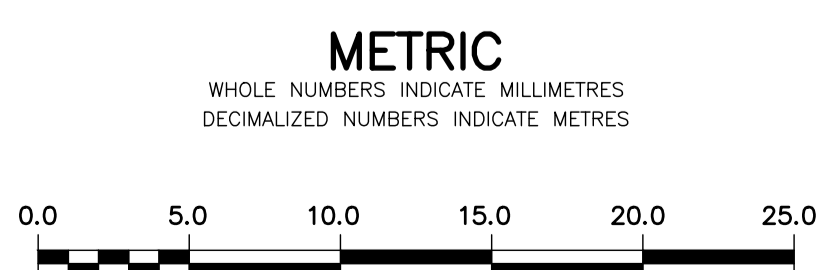


NOTE: CHAINAGES SHOWN ARE ALONG S R OF JAMES AVENUE

WATER SERVICE INFORMATION

| ADDRESS | SIZE (mm) MATERIAL (STREET) | SIZE (mm) MATERIAL (PROP.) | SHORT & LONG MEASUREMENT | CORP. LOCATION | REMARKS |
|--------------------------|-----------------------------|----------------------------|--------------------------|----------------|--|
| 185 KING ST COMMERCIAL | - | - | - | - | RECONNECT SERVICE(S) SERVICED FROM JAMES AVE |
| 223 JAMES AVE COMMERCIAL | 50 | 50 | PE CU 6.9 EEL KING | OPP. S.C. | REPLACE 50 PE SERVICE WITH 50 CU TO PL |
| 510 MAIN ST COMMERCIAL | - | - | - | - | RENEW SERVICE TO PL |
| 540 MAIN ST COMMERCIAL | - | - | - | - | SERVICED OFF JAMES AVE |
| | | | | | OUTSIDE RENEVAL LIMITS |
| | | | | | SERVICED OFF JAMES AVE |

* SERVICES TO BE RENEWED TO R. ALL OTHERS TO BE RECONNECTED

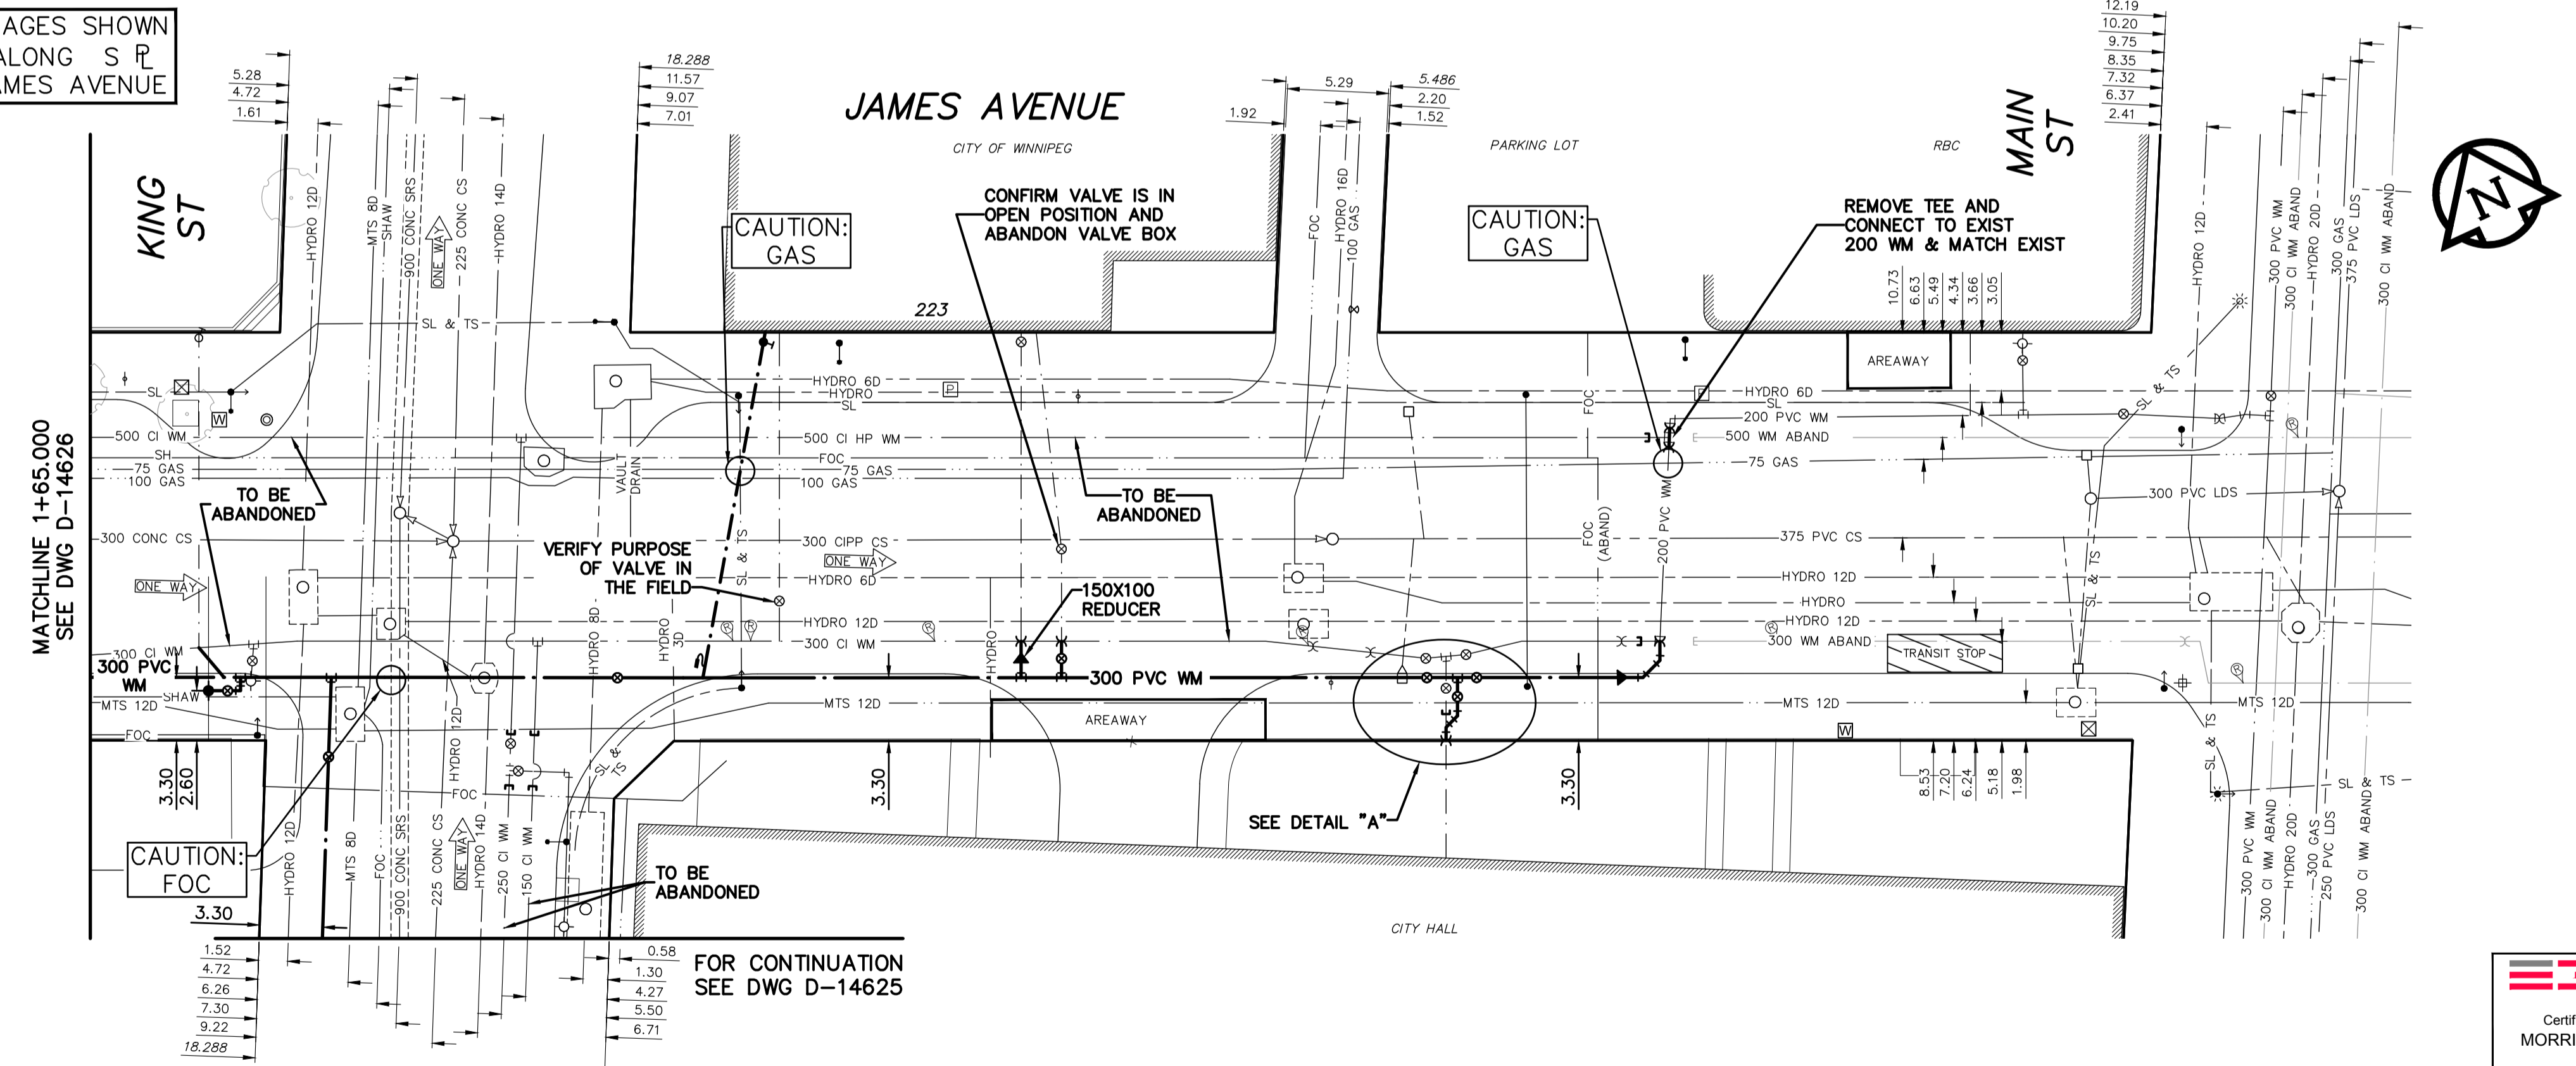

WARNING
IF POWER EQUIPMENT OR EXPLOSIVES ARE TO BE USED FOR EXCAVATION ON THIS PROJECT THE CONTRACTOR MUST:
1) NOTIFY THE GAS COMPANY OF THE PROPOSED LOCATION OF EXCAVATION.
2) TAKE PRECAUTION TO AVOID DAMAGE TO GAS COMPANY INSTALLATIONS.
SEE PROVINCIAL REGULATION 210/72 FOR DETAILS

LOCATION APPROVED UNDERGROUND STRUCTURES
SUPV. U/G STRUCTURES COMMITTEE DATE
NOTE:
LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.

| | | |
|------------|-------------------|---|
| B.M. ELEV. | 35-004 232.156 | Tbit. in N. wall of City Administration Bldg., 0.6 m E. of W. entrance on James St. |
| NO. | REVISIONS | DATE BY |
| | | |

| | | | |
|-------------------|-------|---------------------------|------------|
| DESIGNED BY | JKH | CHECKED BY | HAK |
| DRAWN BY | DML | APPROVED BY | BWB |
| SCALE: HORIZONTAL | 1:250 | RELEASED FOR CONSTRUCTION | KAS ZUREK |
| SCALE: VERTICAL | 1:50 | DATE | 2017 03 09 |
| | | DATE | 2017 04 20 |



FOR INDEX SEE D-14618

NOTE: ALL VALVES TO BE INSTALLED COUNTERCLOCKWISE TO CLOSE

ENGINEER'S SEAL
ORIGINAL SIGNED BY H.A. KATZ
2017 04 20

THE CITY OF WINNIPEG
WATER AND WASTE DEPARTMENT
ENGINEERING DIVISION

2017 WATER MAIN RENEWALS
CONTRACT 7
JAMES AVENUE
9 m W OF KING STREET TO MAIN STREET

SHEET 11 OF 14
CITY DRAWING NUMBER
D-14627