



NOTE: CHAINAGES SHOWN ARE ALONG Q OF TACHE AVENUE

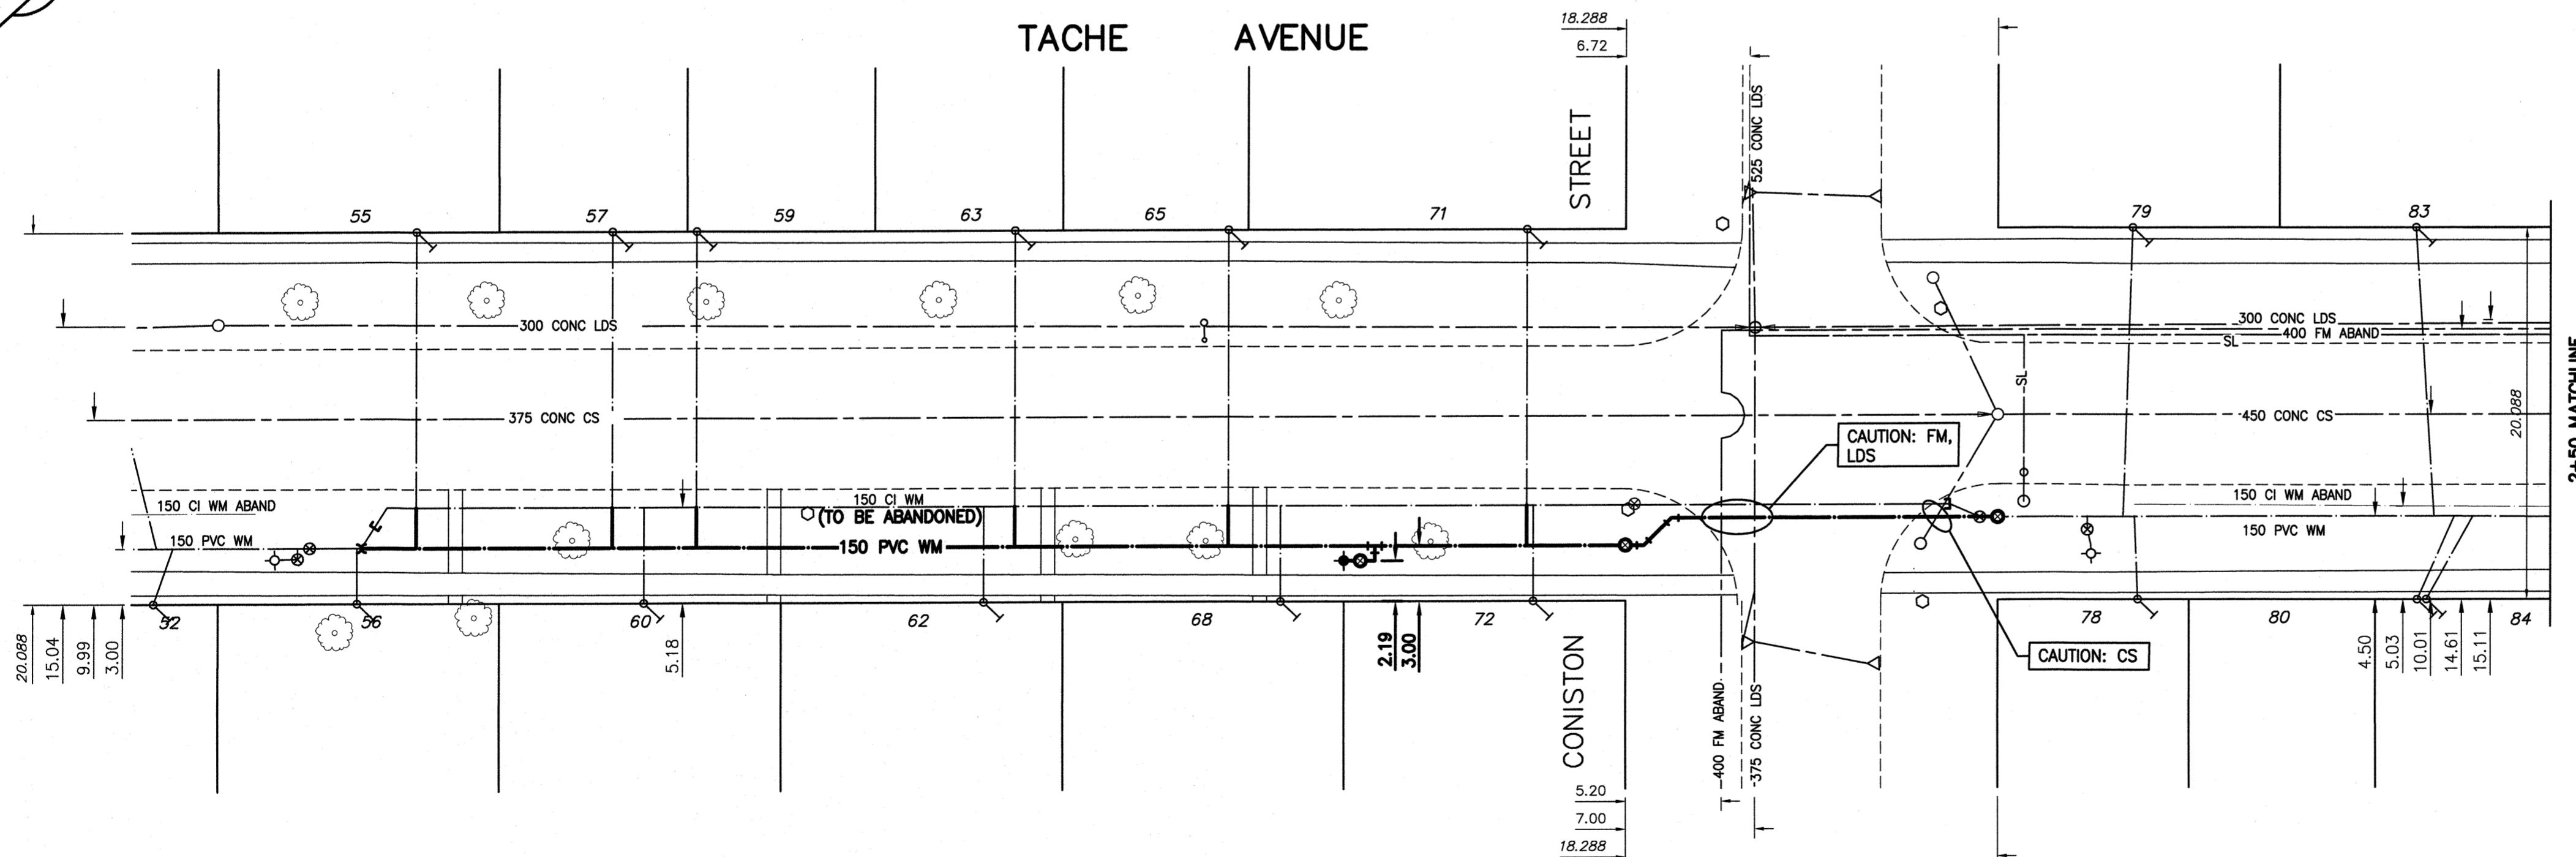

WATER SERVICE INFORMATION

ADDRESS	PIPE SIZE & MATERIAL (STREET)	PIPE SIZE & MATERIAL (PROP.)	SHORT & LONG MEASUREMENT	CORP. LOCATION	REMARKS
55 TACHE AVE	20 COPPER	20	1.71 LR CR OF HSE	OPP S/C	RECONNECT SERVICE
56 TACHE AVE	20 COPPER	20	99.7 FROM HYD	3.69 N/HYDT	RECONNECT SERVICE
57 TACHE AVE	20 COPPER	20	0.15 RRHL		RECONNECT SERVICE
58 TACHE AVE	20 COPPER	20	74.7 FROM HYD		RECONNECT SERVICE
59 TACHE AVE	20 COPPER	20	1.74 L R COR HSE		RECONNECT SERVICE
60 TACHE AVE	20 COPPER	20	114.02 FROM HYD		RECONNECT SERVICE
61 TACHE AVE	20 COPPER	20	0.3 LHHL		RECONNECT SERVICE
62 TACHE AVE	20 COPPER	20	115.85 FROM HYD		RECONNECT SERVICE
63 TACHE AVE	20 COPPER	20	4.57 R L COR HSE		RECONNECT SERVICE
64 TACHE AVE	20 COPPER	20	89.94 FROM HYD		RECONNECT SERVICE
65 TACHE AVE	20 COPPER	20	2.59 R L COR HSE		RECONNECT SERVICE
66 TACHE AVE	20 COPPER	20	108.23 FROM HYD		RECONNECT SERVICE
67 TACHE AVE	20 COPPER	20	3.66 L R COR HSE		RECONNECT SERVICE
68 TACHE AVE	20 COPPER	20	129.57 FROM HYD		RECONNECT SERVICE
69 TACHE AVE	20 COPPER	20	0 RHL		RECONNECT SERVICE
70 TACHE AVE	20 COPPER	20	143.29 FROM HYD		RECONNECT SERVICE
71 TACHE AVE	20 COPPER	20	1.22 R L COR HSE		RECONNECT SERVICE
72 TACHE AVE	20 COPPER	20	42.07 FROM HYD		RECONNECT SERVICE
73 TACHE AVE	20 COPPER	20	3.05 L R COR HSE		RECONNECT SERVICE
74 TACHE AVE	20 COPPER	20	11.13 FROM CONISTON CURB		RECONNECT SERVICE
75 TACHE AVE	20 COPPER	20	1.68 RLHL		RECONNECT SERVICE
76 TACHE AVE	20 COPPER	20	27.13 FROM HYD		RECONNECT SERVICE
77 TACHE AVE	20 COPPER	12	0.67 R L COR HSE	2.41 N/HYDT	OUTSIDE LIMITS
78 TACHE AVE	20 COPPER	12	4.73 FROM HYD		OUTSIDE LIMITS
79 TACHE AVE	20 COPPER	20	5.64 L R COR HSE	1.8 N/HYDT	OUTSIDE LIMITS
80 TACHE AVE	20 COPPER	20	17.99 FROM HYD		OUTSIDE LIMITS
81 TACHE AVE	20 COPPER	12	4.12 LHHL	19.7 N/HYDT	OUTSIDE LIMITS
82 TACHE AVE	20 COPPER	12	19.51 FROM HYD		OUTSIDE LIMITS
83 TACHE AVE	20 COPPER	12	4.57 L R COR HSE	19.7 N/HYDT	OUTSIDE LIMITS
84 TACHE AVE	20 COPPER	12	25.91 FROM HYD	20.7 N/HYDT	OUTSIDE LIMITS
85 TACHE AVE	20 COPPER	12	2.04 L R COR HSE		OUTSIDE LIMITS
86 TACHE AVE	20 COPPER	12	19.51 FROM HYD		OUTSIDE LIMITS

NOTE: VALVES TO BE INSTALLED CLOCKWISE TO CLOSE

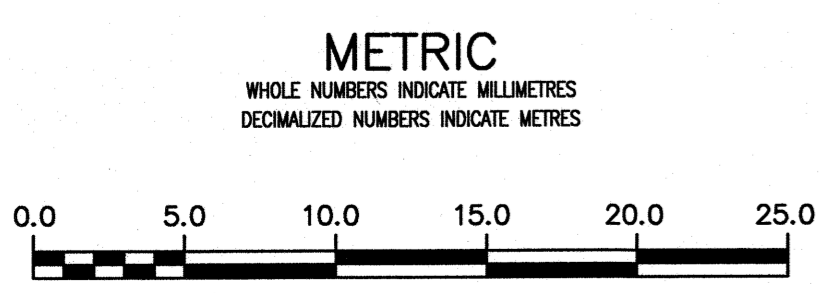

ENGINEERS
GEOSCIENTISTS
MANITOBA
Certificate of Authorization
Stantec Consulting Ltd.
No. 1301

LOCATION APPROVED
UNDERGROUND STRUCTURES

SUPV. U/G STRUCTURES COMMITTEE DATE


NOTE:
LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.

B.M. 34-4 372 (654372) - Tbt. in 7.6 m Conc. pile, 2.1 m N. of ELEV. 229.873m line of N. wall of No. 146 Tache Ave. S. of St.

NO.	ISSUED FOR TENDER	DATE	BY
01	ISSUED FOR TENDER	2018.04.06	RS
	REVISIONS	DATE	BY



DESIGNED BY RS
CHECKED BY WB
DRAWN BY SG
APPROVED BY RS
SCALE: HORIZONTAL 1:250
VERTICAL 1:50
DATE 2018 02 26
PLOT DATE: 2018 04 06

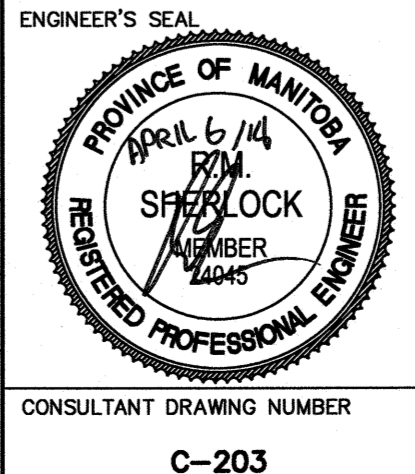

THE CITY OF WINNIPEG
Winnipeg
WATER AND WASTE DEPARTMENT
ENGINEERING DIVISION

2018 WATERMAIN RENEWALS
CONTRACT 7
TACHE AVENUE
68.4 SSL CONISTON STREET TO
50 NSL CONISTON STREET

SHEET 5 OF 17
CITY DRAWING NUMBER
D-15052