


NOTE: CHAINAGES SHOWN ARE ALONG ϕ OF BERESFORD AVENUE


WATER SERVICE INFORMATION

ADDRESS	PIPE SIZE & MATERIAL (STREET)	PIPE SIZE & MATERIAL (PROP.)	SHORT & LONG MEASUREMENT	CORP. LOCATION	REMARKS
* 573 BERESFORD AVE	-	-	-	-	RENEW TO PL W/ 20 CU WYED W/ 575 (SEPARATE SERVICES)
* 575 BERESFORD AVE	-	-	-	-	RENEW TO PL W/ 20 CU WYED W/ 573 (SEPARATE SERVICES)
577 BERESFORD AVE	20 COPPER	12 COPPER	1.68 E/EHL	0.61 W OF S/C	RECONNECT SERVICE
578 BERESFORD AVE	20 COPPER	20 COPPER	125.00 W/L NASSAU	0.3 W OF S/C	RECONNECT SERVICE
579 BERESFORD AVE	20 COPPER	20 COPPER	115.85 W/L NASSAU	OPPOSITE	RECONNECT SERVICE
* 580 BERESFORD AVE	12 COPPER	20 COPPER	1.07 W OF E/L HSE	89.33 EEL DALY	RENEW TO PL W/ 20 CU
581 BERESFORD AVE	20 COPPER	20 COPPER	90.24 EEL DALY	OPP S/C	RECONNECT SERVICE
* 582 BERESFORD AVE	12 COPPER	12 COPPER	1.77 WEL HSE	0.3 W S/C	RENEW TO PL W/ 20 CU
583 BERESFORD AVE	20 COPPER	20 COPPER	81.10 EEL DALY	0.91 W S/C	RENEW TO PL W/ 20 CU WYED W/ 585 (SEPARATE SERVICES)
* 584 BERESFORD AVE	12 COPPER	12 COPPER	2.44 EWL HSE	0.91 W S/C	RENEW TO PL W/ 20 CU
* 585 BERESFORD AVE	12 COPPER	12 COPPER	53.35 W 1ST HYD E DALY	0.91 W S/C	RENEW TO PL W/ 20 CU WYED W/ 583 (SEPARATE SERVICES)
587 BERESFORD AVE	20 COPPER	12 COPPER	1.16 WEL HSE	0.3 E S/C	RECONNECT SERVICE
589 BERESFORD AVE	20 COPPER	20 COPPER	71.07 EEL DALY	0.46 E S/C	RECONNECT SERVICE
* 591 BERESFORD AVE	12 COPPER	12 COPPER	2.74 EWL OF 583	SAME AS S/C	RENEW TO PL W/ 20 CU
* 593 BERESFORD AVE	16 COPPER	12 COPPER	53.66 W 1ST HYD E DALY	11.28 EEL DALY	RENEW TO PL W/ 20 CU WYED W/ 595 (SEPARATE SERVICES)
595 BERESFORD AVE	20 COPPER	20 COPPER	10.98 EEL DALY	-	RENEW TO PL W/ 20 CU WYED W/ 593 (SEPARATE SERVICES)
596 BERESFORD AVE	20 COPPER	12 COPPER	3.35 WEL HSE	0.61 W S/C	RECONNECT SERVICE
598 BERESFORD AVE	20 COPPER	20 COPPER	1.52 EWL HSE	0.15 W S/C	RECONNECT SERVICE
* 600 BERESFORD AVE	16 COPPER	12 COPPER	51.83 W 1ST HYD E DALY	41.16 EEL DALY	RENEW TO PL W/ 20 CU
604 BERESFORD AVE	20 COPPER	20 COPPER	3.05 WEL HSE	26.52 EEL DALY	RECONNECT SERVICE
608 BERESFORD AVE	20 COPPER	20 COPPER	49.70 EEL DALY	0.3 W S/C	RECONNECT SERVICE
RESIDENTIAL	20 COPPER	20 COPPER	1.22 EWL BASEMENT	11.59 EEL DALY	RECONNECT SERVICE
RESIDENTIAL	20 COPPER	20 COPPER	39.33 EEL DALY	-	RECONNECT SERVICE
RESIDENTIAL	20 COPPER	20 COPPER	27.44 EEL DALY	-	RECONNECT SERVICE
RESIDENTIAL	20 COPPER	20 COPPER	1.07 WEL HSE	-	RECONNECT SERVICE
RESIDENTIAL	20 COPPER	20 COPPER	11.59 EEL DALY	-	RECONNECT SERVICE

* SERVICES TO BE RENEWED TO R

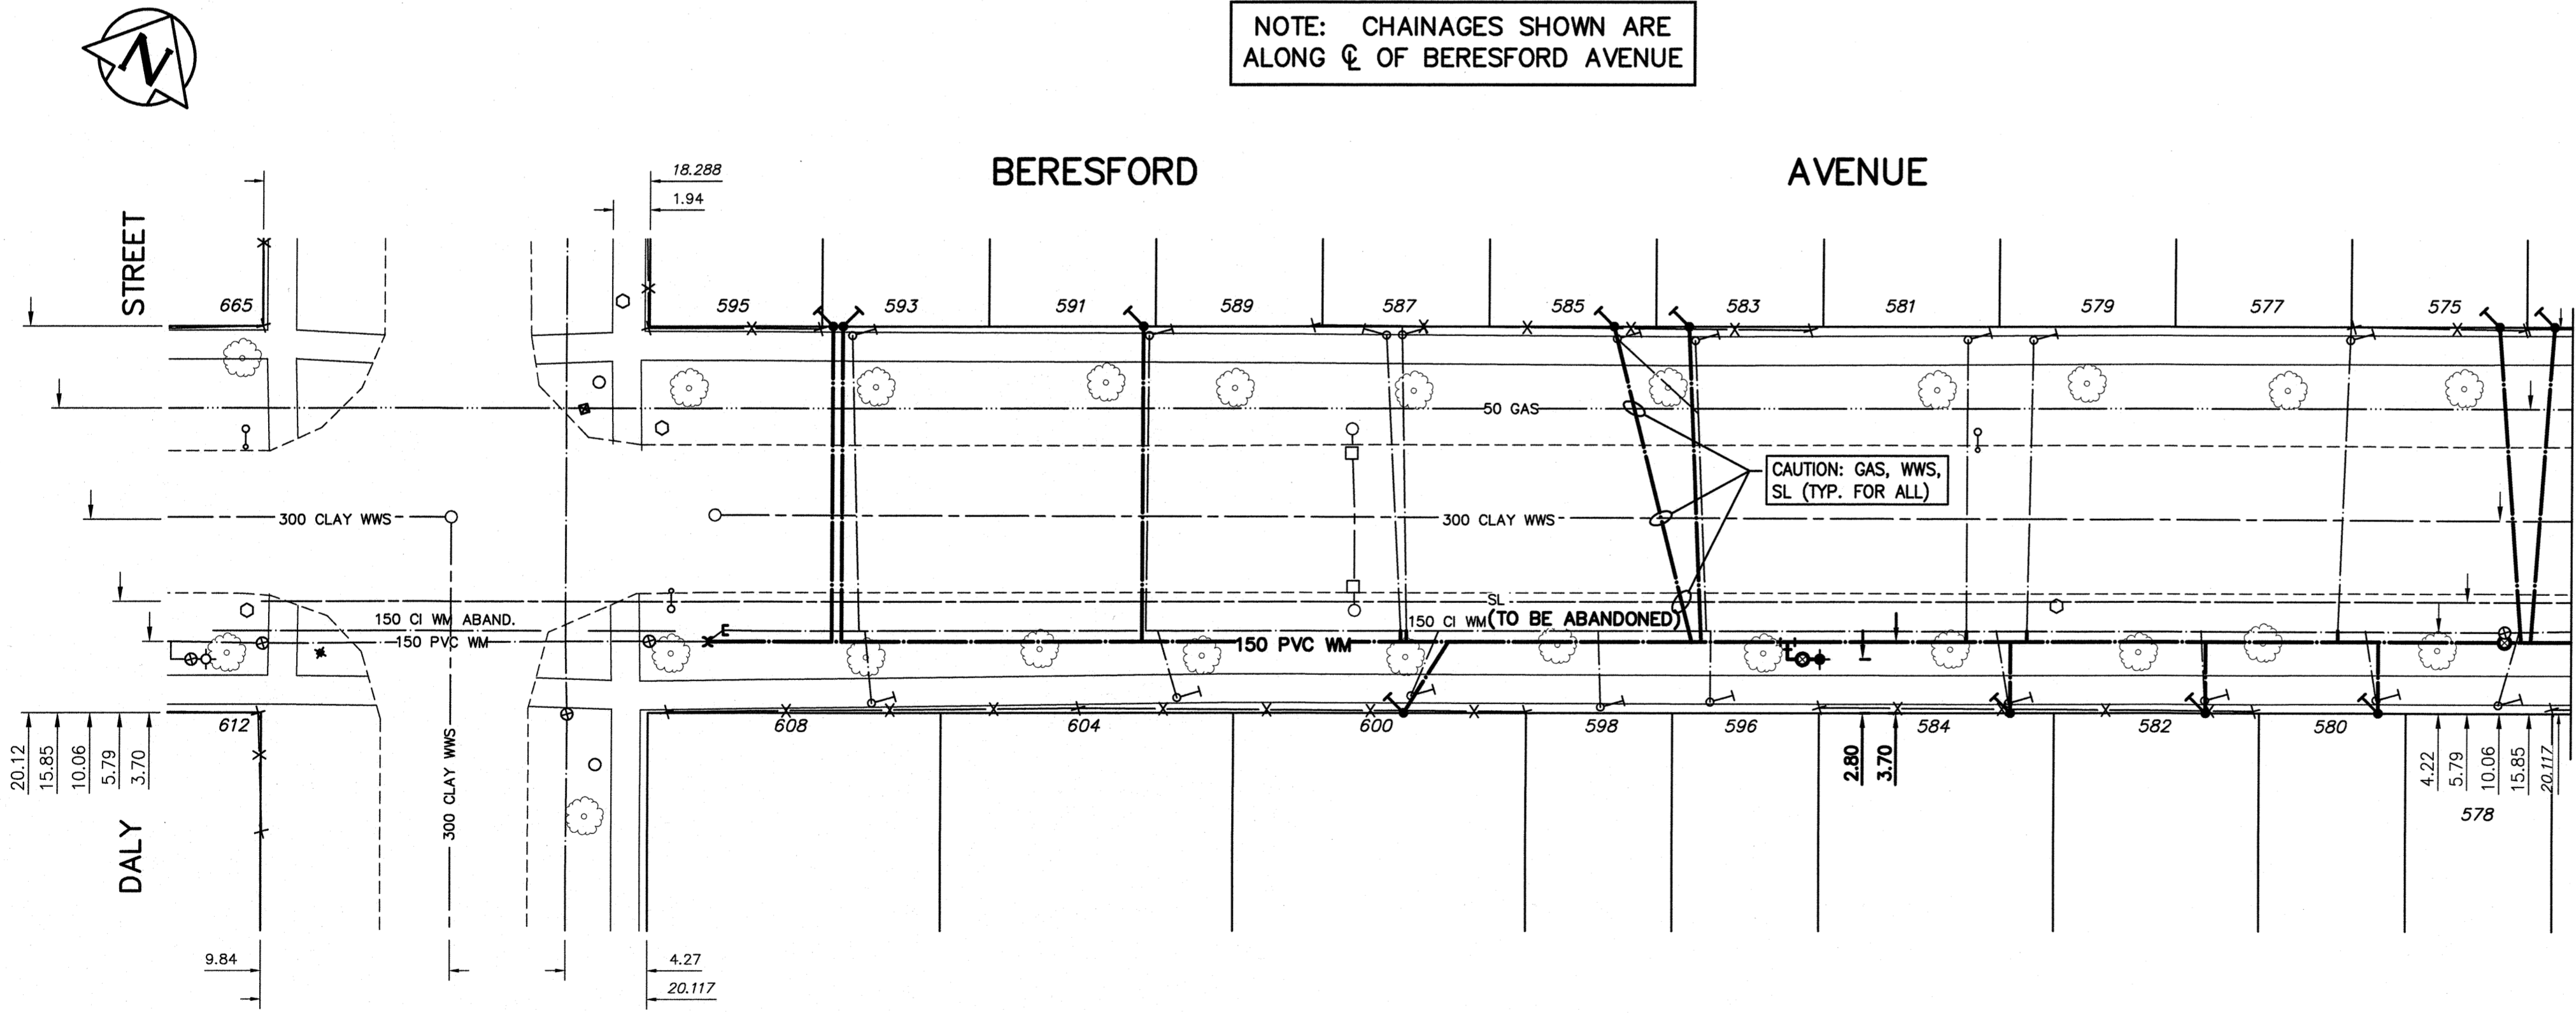

NOTE: VALVES TO BE INSTALLED COUNTERCLOCKWISE TO CLOSE

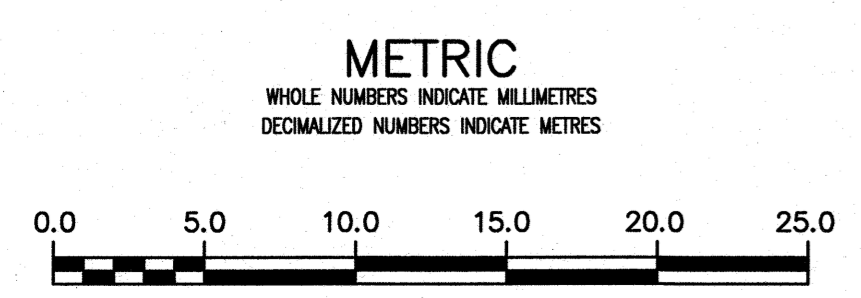

ENGINEERS GEOSCIENTISTS MANITOBA
 Certificate of Authorization
 Stantec Consulting Ltd.
 No. 1301

LOCATION APPROVED UNDERGROUND STRUCTURES
 SUPV. U/G STRUCTURES COMMITTEE DATE
 NOTE: LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL UTILITIES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.

B.M. 53-21 N.E. Cor. Beresford Ave. & Nassau St. S., Tbt. in S. Conc. foundation of No. 525 Beresford Ave., 1.2 m E. & 0.2 m below ELEV. 232.577m brick from the most S. Wy. Cor. of Bldg. (Roseale United Church)

NO.	ISSUED FOR TENDER	DATE	BY
01	ISSUED FOR TENDER	2018.04.06	RS

Stantec

DESIGNED BY: RS
 CHECKED BY: WB
 DRAWN BY: SC
 APPROVED BY: RS
 SCALE: HORIZONTAL 1:250, VERTICAL 1:50
 RELEASED FOR CONSTRUCTION
 DATE: 2018 02 26
 PLOT DATE: 2018 04 06

ENGINEER'S SEAL

 CONSULTANT DRAWING NUMBER: C-207

THE CITY OF WINNIPEG
 WATER AND WASTE DEPARTMENT
 ENGINEERING DIVISION

2018 WATERMAIN RENEWALS
 CONTRACT 7
 BERESFORD AVENUE
 DALY STREET TO
 100 EEL DALY STREET

SHEET 9 OF 17
 CITY DRAWING NUMBER: D-15056