

GENERAL NOTES


- ALL UTILITIES ARE SHOWN AS INFORMATION ONLY. CONTRACTOR TO CONFIRM LOCATION OF ALL UTILITIES ON SITE PRIOR TO CONSTRUCTION.
- CONTRACTOR SHALL PROVIDE QUALIFIED CREW TO LAY OUT LANDSCAPING ELEMENTS. THE CREW SHALL BE EQUIPPED WITH ALL THE NECESSARY EQUIPMENT TO PROVIDE HORIZONTAL AND VERTICAL LAYOUT IN ACCORDANCE WITH THE DRAWINGS AND SPECIFICATIONS.
- CONTRACTOR TO STAKE OUT LOCATION OF ALL WORKS FOR REVIEW BY CONTRACT ADMINISTRATOR PRIOR TO ANY REMOVALS OR CONSTRUCTION.
- DURING CONSTRUCTION CONTRACTOR TO PROTECT TO CITY OF WINNIPEG STANDARDS ALL EXISTING BUILDINGS & FEATURES, ABOVE & BELOW GROUND UTILITIES, PAVING, CURBS, SIDEWALKS, FENCING, BOLLARDS, HYDRANTS, CATCH BASINS, WATER VALVES AND PLANTING MATERIAL TO REMAIN. AREAS DAMAGED DURING CONSTRUCTION TO BE REPAIRED IN ACCORDANCE WITH CITY OF WINNIPEG STANDARD CONSTRUCTION SPECIFICATIONS AT NO COST TO THE CITY.
- RESTORE DAMAGED AND DISTURBED SURFACES WITHIN AND ADJACENT TO SITE PER CW1130.
- ALL WORK TO BE DONE IN ACCORDANCE WITH CITY OF WINNIPEG STANDARD CONSTRUCTION SPECIFICATIONS UNLESS OTHERWISE INDICATED.

PROTECTION AND PRUNING OF EXISTING TREES:

- CONTRACTOR TO MARK OUT WORKING LIMITS FOR APPROVAL INCLUDING VERTICAL WORKING ROOM.
- NO TREES MAY BE REMOVED OR PRUNED WITHOUT APPROVAL FROM THE CONTRACT ADMINISTRATOR.
- ERECT 1.22m HT. SNOW FENCE FENCE TREE PROTECTION BARRIER BETWEEN TREE STANDS AND INDIVIDUAL TREES ADJACENT TO NEW CONSTRUCTION. FIELD VERIFY LOCATION OF FENCE WITH CONTRACT ADMINISTRATOR PRIOR TO COMMENCEMENT OF CONSTRUCTION ACTIVITIES.
- STRAP ALL INDIVIDUAL TREES TO CW1140.
- ROOT CUTTING, WITH APPROVAL.
- PRUNING BY PROFESSIONAL ARBORIST, AS SPECIFIED.


MATERIALS LEGEND:

- EXISTING STREET LIGHT
- LIGHT STANDARD BY OTHERS
- PROTECT EXISTING TREES & SHRUBS
- ASPHALT PATH SEE CIVIL
- CIP CONC. SEE CIVIL
- SODDING

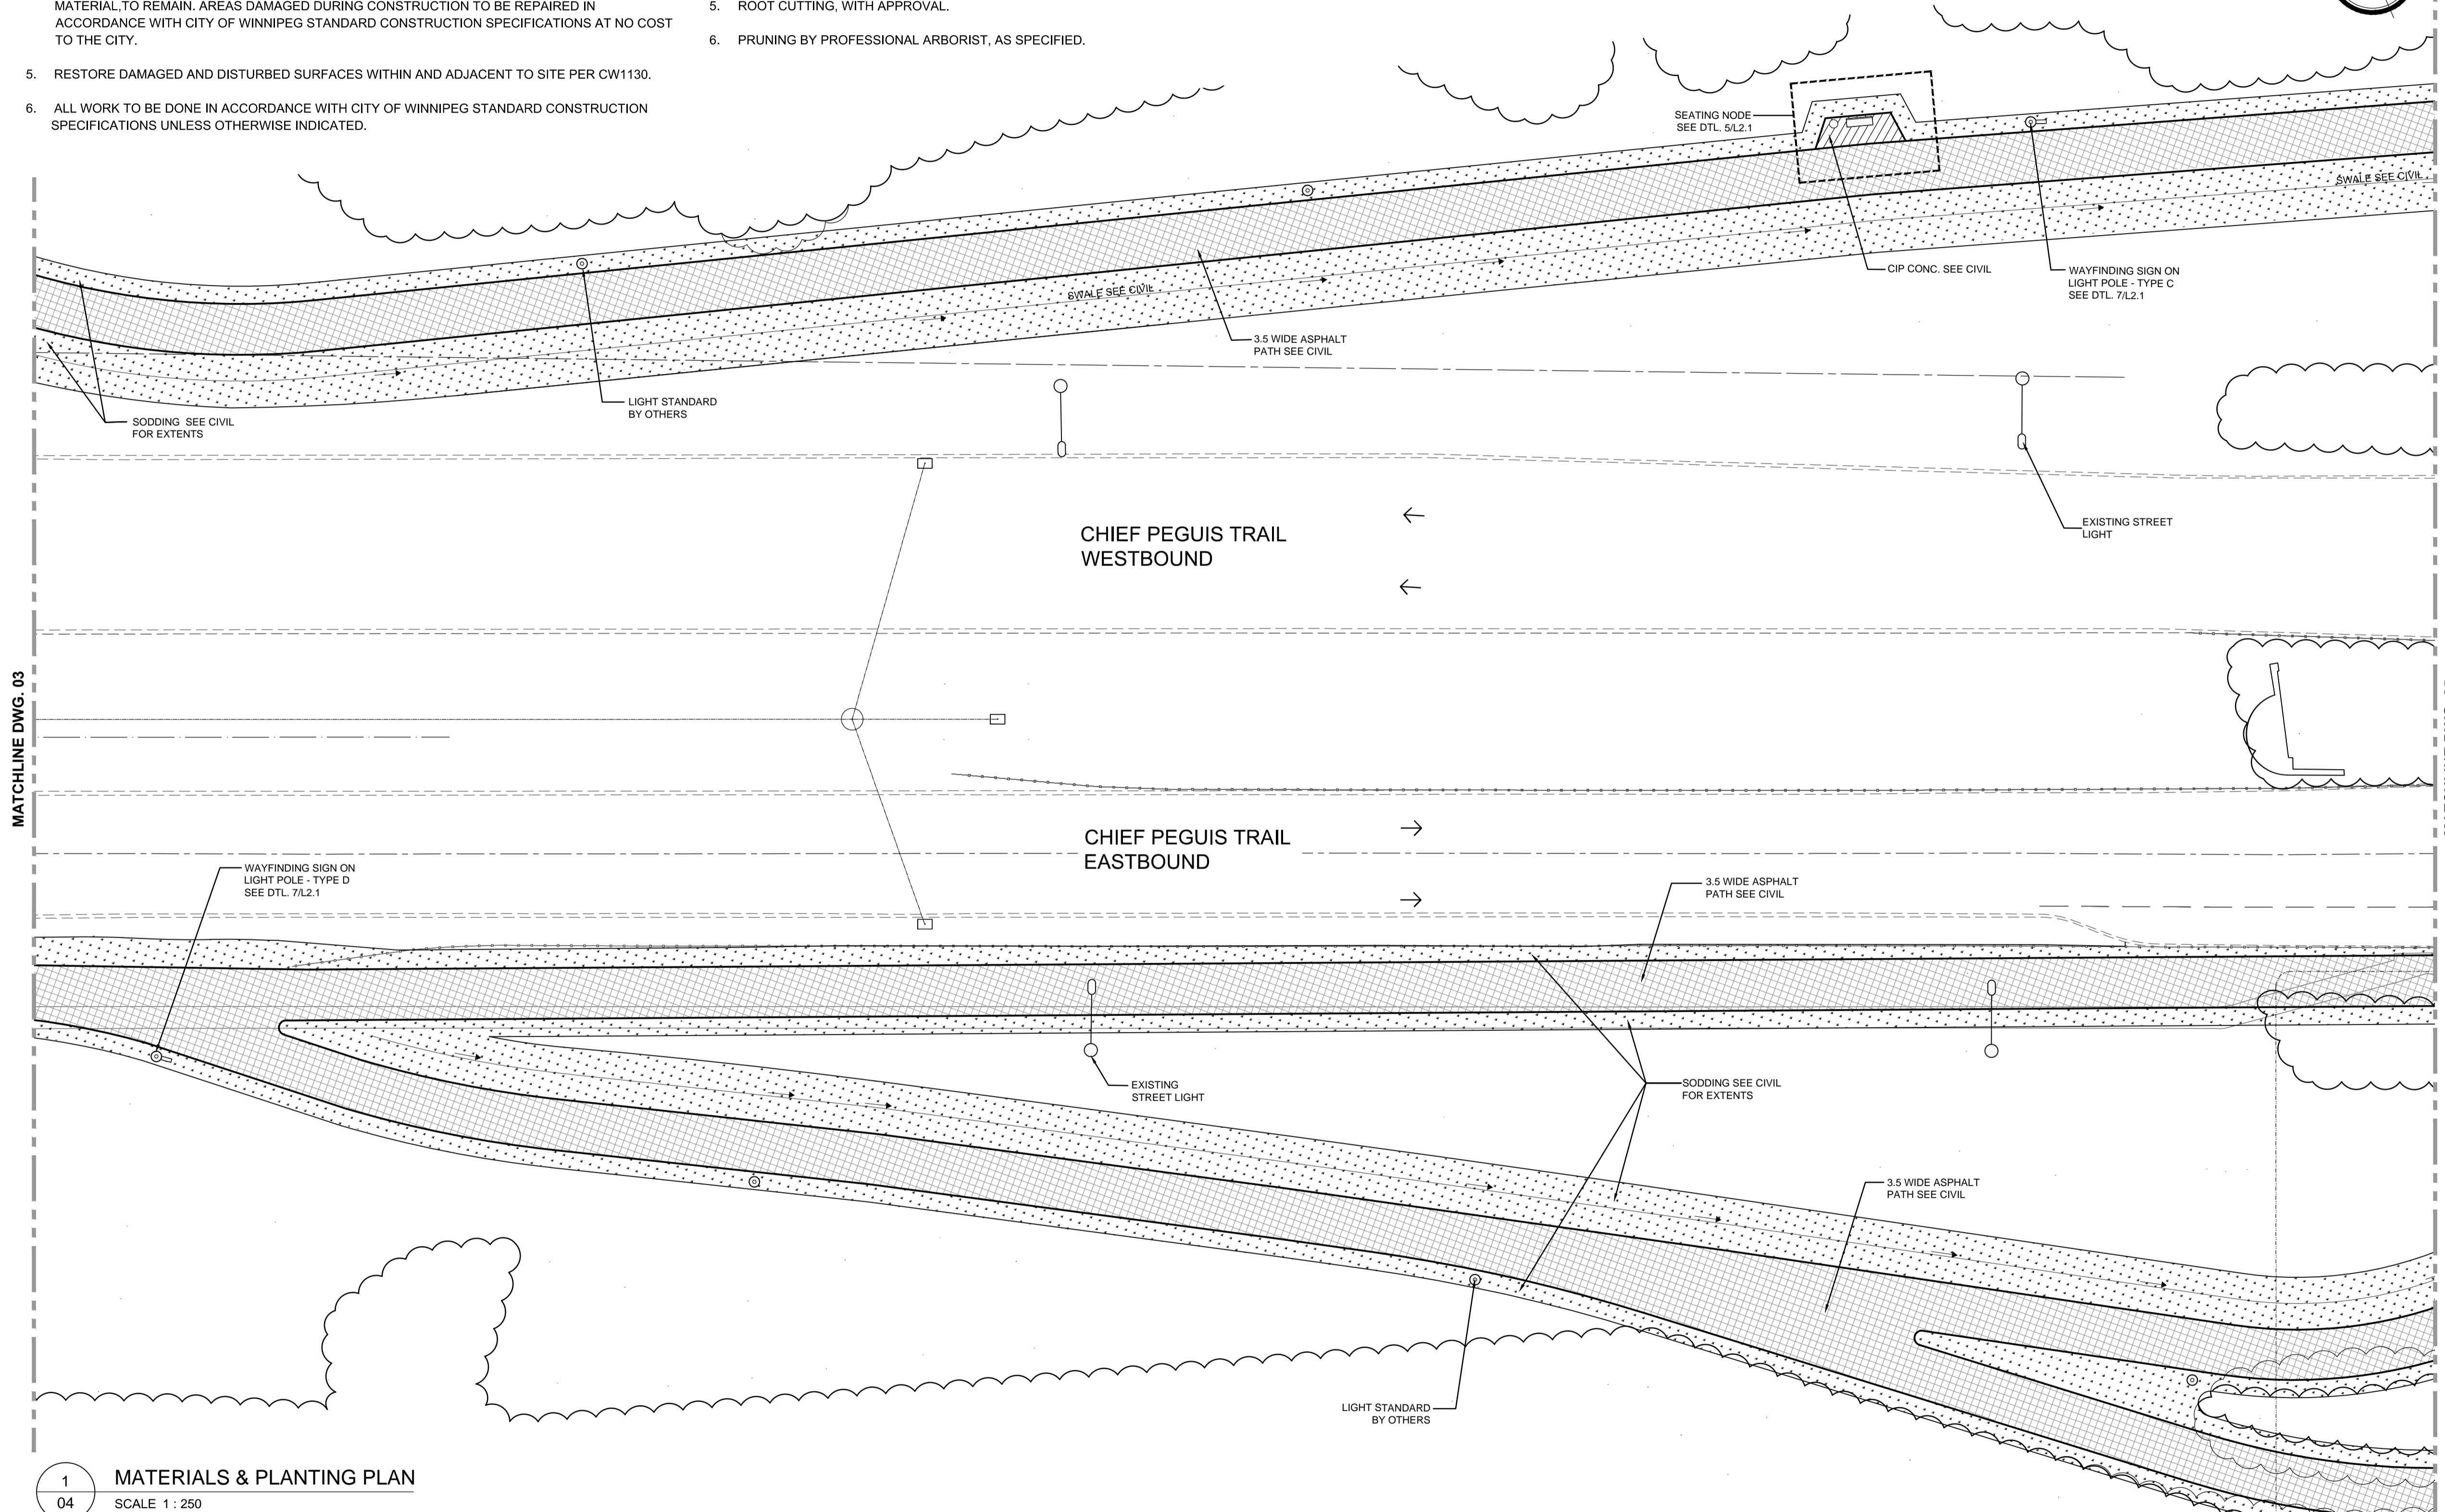

1
04 MATERIALS & PLANTING PLAN
SCALE 1 : 250

KEY PLAN : NTS

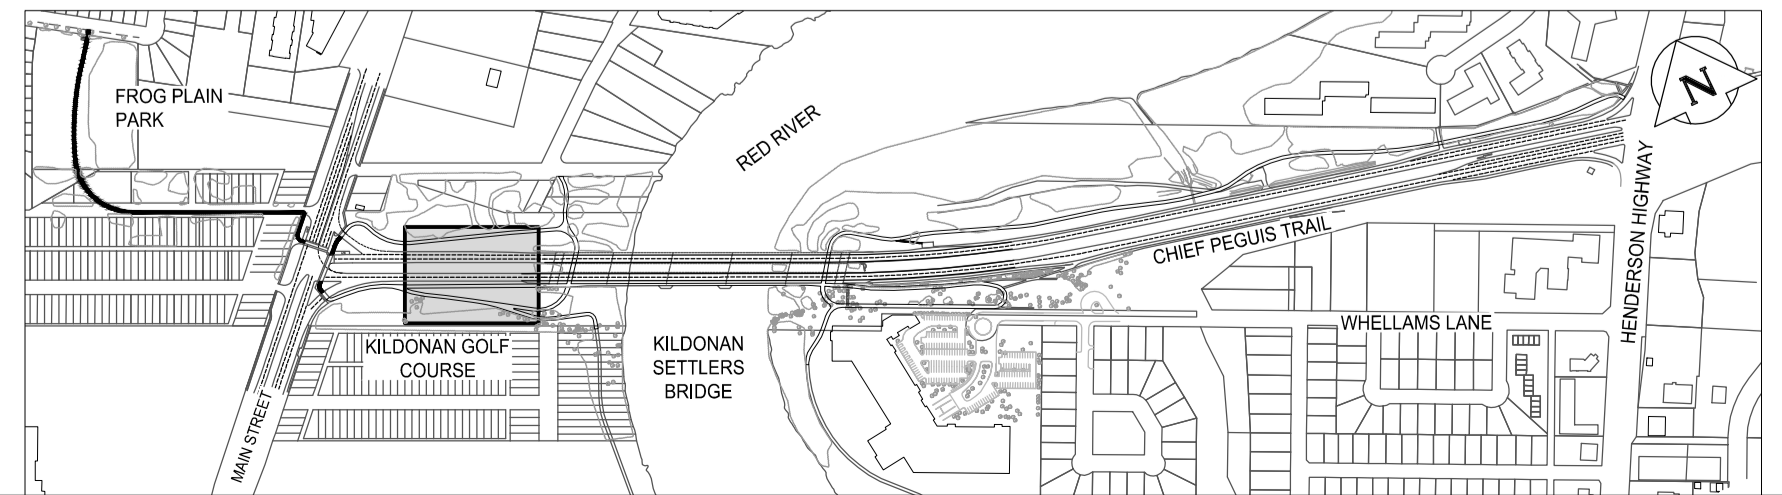

LOCATIONS APPROVED UNDERGROUND STRUCTURES			
SIGNED BY:	NO.	DATE	BY
SUPV U/G STRUCTURES	7		
	6		
	5		
	4		
	3		
	2	ISSUED FOR TENDER	21-FEB-18 JH
	1	ISSUED FOR REVIEW	09-FEB-18 JH
	0	ISSUED FOR 90% REVIEW	09-JAN-17 JH
NO. REVISIONS		DATE	BY

LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT CONFIRMATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING

HTFC
PLANNING & DESIGN
200-225 St. James Avenue East Winnipeg, MB R2B 0P2
PH: (204) 944-1907

DESIGNED BY: JH	CHECKED BY: GM
DRAWN BY: JH	APPROVED BY: GM

WORK SCALE: VERTICAL
RELEASED FOR CONSTRUCTION
DATE: 21 FEB 2018

ENGINEER'S SEAL
[Signature]
Member No. 81
Feb 21, 2018

CONSULTANT ACAD DWG. NO.
L1.4

THE CITY OF WINNIPEG
PUBLIC WORKS DEPARTMENT
ENGINEERING DIVISION

CHIEF PEGUIS TRAIL - GREENWAY EXTENSION
FROG PLAIN WAY TO HENDERSON HIGHWAY

MATERIALS & PLANTING PLAN

SHEET **04** OF **13**
BID NO. 04-2018

Feb 06 2018 - 10:34am
 \\ps01\htfc\FILE_SERVER\2017\17-094 Chief Peguis Trail Greenway Extension_ACAD\17-094 Layout.dwg - tab:1.4