

MATCHLINE DTL. 2 THIS SHEET

GENERAL NOTES

1. ALL UTILITIES ARE SHOWN AS INFORMATION ONLY. CONTRACTOR TO CONFIRM LOCATION OF ALL UTILITIES ON SITE PRIOR TO CONSTRUCTION.
2. CONTRACTOR SHALL PROVIDE QUALIFIED CREW TO LAY OUT LANDSCAPING ELEMENTS. THE CREW SHALL BE EQUIPPED WITH ALL THE NECESSARY EQUIPMENT TO PROVIDE HORIZONTAL AND VERTICAL LAYOUT IN ACCORDANCE WITH THE DRAWINGS AND SPECIFICATIONS.
3. CONTRACTOR TO STAKE OUT LOCATION OF ALL WORKS FOR REVIEW BY CONTRACT ADMINISTRATOR PRIOR TO ANY REMOVALS OR CONSTRUCTION.
4. DURING CONSTRUCTION CONTRACTOR TO PROTECT TO CITY OF WINNIPEG STANDARDS ALL EXISTING BUILDINGS & FEATURES, ABOVE & BELOW GROUND UTILITIES, PAVING, CURBS, SIDEWALKS, FENCING, BOLLARDS, HYDRANTS, CATCH BASINS, WATER VALVES AND PLANTING MATERIAL TO REMAIN. AREAS DAMAGED DURING CONSTRUCTION TO BE REPAIRED IN ACCORDANCE WITH CITY OF WINNIPEG STANDARD CONSTRUCTION SPECIFICATIONS AT NO COST TO THE CITY.
5. RESTORE DAMAGED AND DISTURBED SURFACES WITHIN AND ADJACENT TO SITE PER CW1130.
6. ALL WORK TO BE DONE IN ACCORDANCE WITH CITY OF WINNIPEG STANDARD CONSTRUCTION SPECIFICATIONS UNLESS OTHERWISE INDICATED.

PROTECTION AND PRUNING OF EXISTING TREES:



1. CONTRACTOR TO MARK OUT WORKING LIMITS FOR APPROVAL INCLUDING VERTICAL WORKING ROOM.
2. NO TREES MAY BE REMOVED OR PRUNED WITHOUT APPROVAL FROM THE CONTRACT ADMINISTRATOR.
3. ERECT 1.22m HT. SNOW FENCE BETWEEN TREE STANDS AND INDIVIDUAL TREES ADJACENT TO NEW CONSTRUCTION. FIELD VERIFY LOCATION OF FENCE WITH CONTRACT ADMINISTRATOR PRIOR TO COMMENCEMENT OF CONSTRUCTION ACTIVITIES.
4. STRAP ALL INDIVIDUAL TREES TO CW1140.
5. ROOT CUTTING, WITH APPROVAL.
6. PRUNING BY PROFESSIONAL ARBORIST, AS SPECIFIED.

PLANT SPECIFICATION LIST

QTY	BOTANICAL / COMMON NAME	SIZE / REMARKS
Deciduous Trees		
21	<i>Acer negundo</i> / Manitoba Maple	Single-stem 65mm cal. 12 major branches in well formed head 1.5m above grade B & B, wire basket. Double stake.
13	<i>Alnus A. hirsula</i> 'Harlan' / Prairie Horizon Alder	Single-stem 65mm cal. 12 major branches in well formed head 1.5m above grade B & B, wire basket. Double stake.

MATERIALS LEGEND:


- EXISTING STREET LIGHT
- LIGHT STANDARD BY OTHERS
- PROTECT EXISTING TREES & SHRUBS
- ASPHALT PATH SEE CIVIL
- CIP CONC. SEE CIVIL
- SODDING

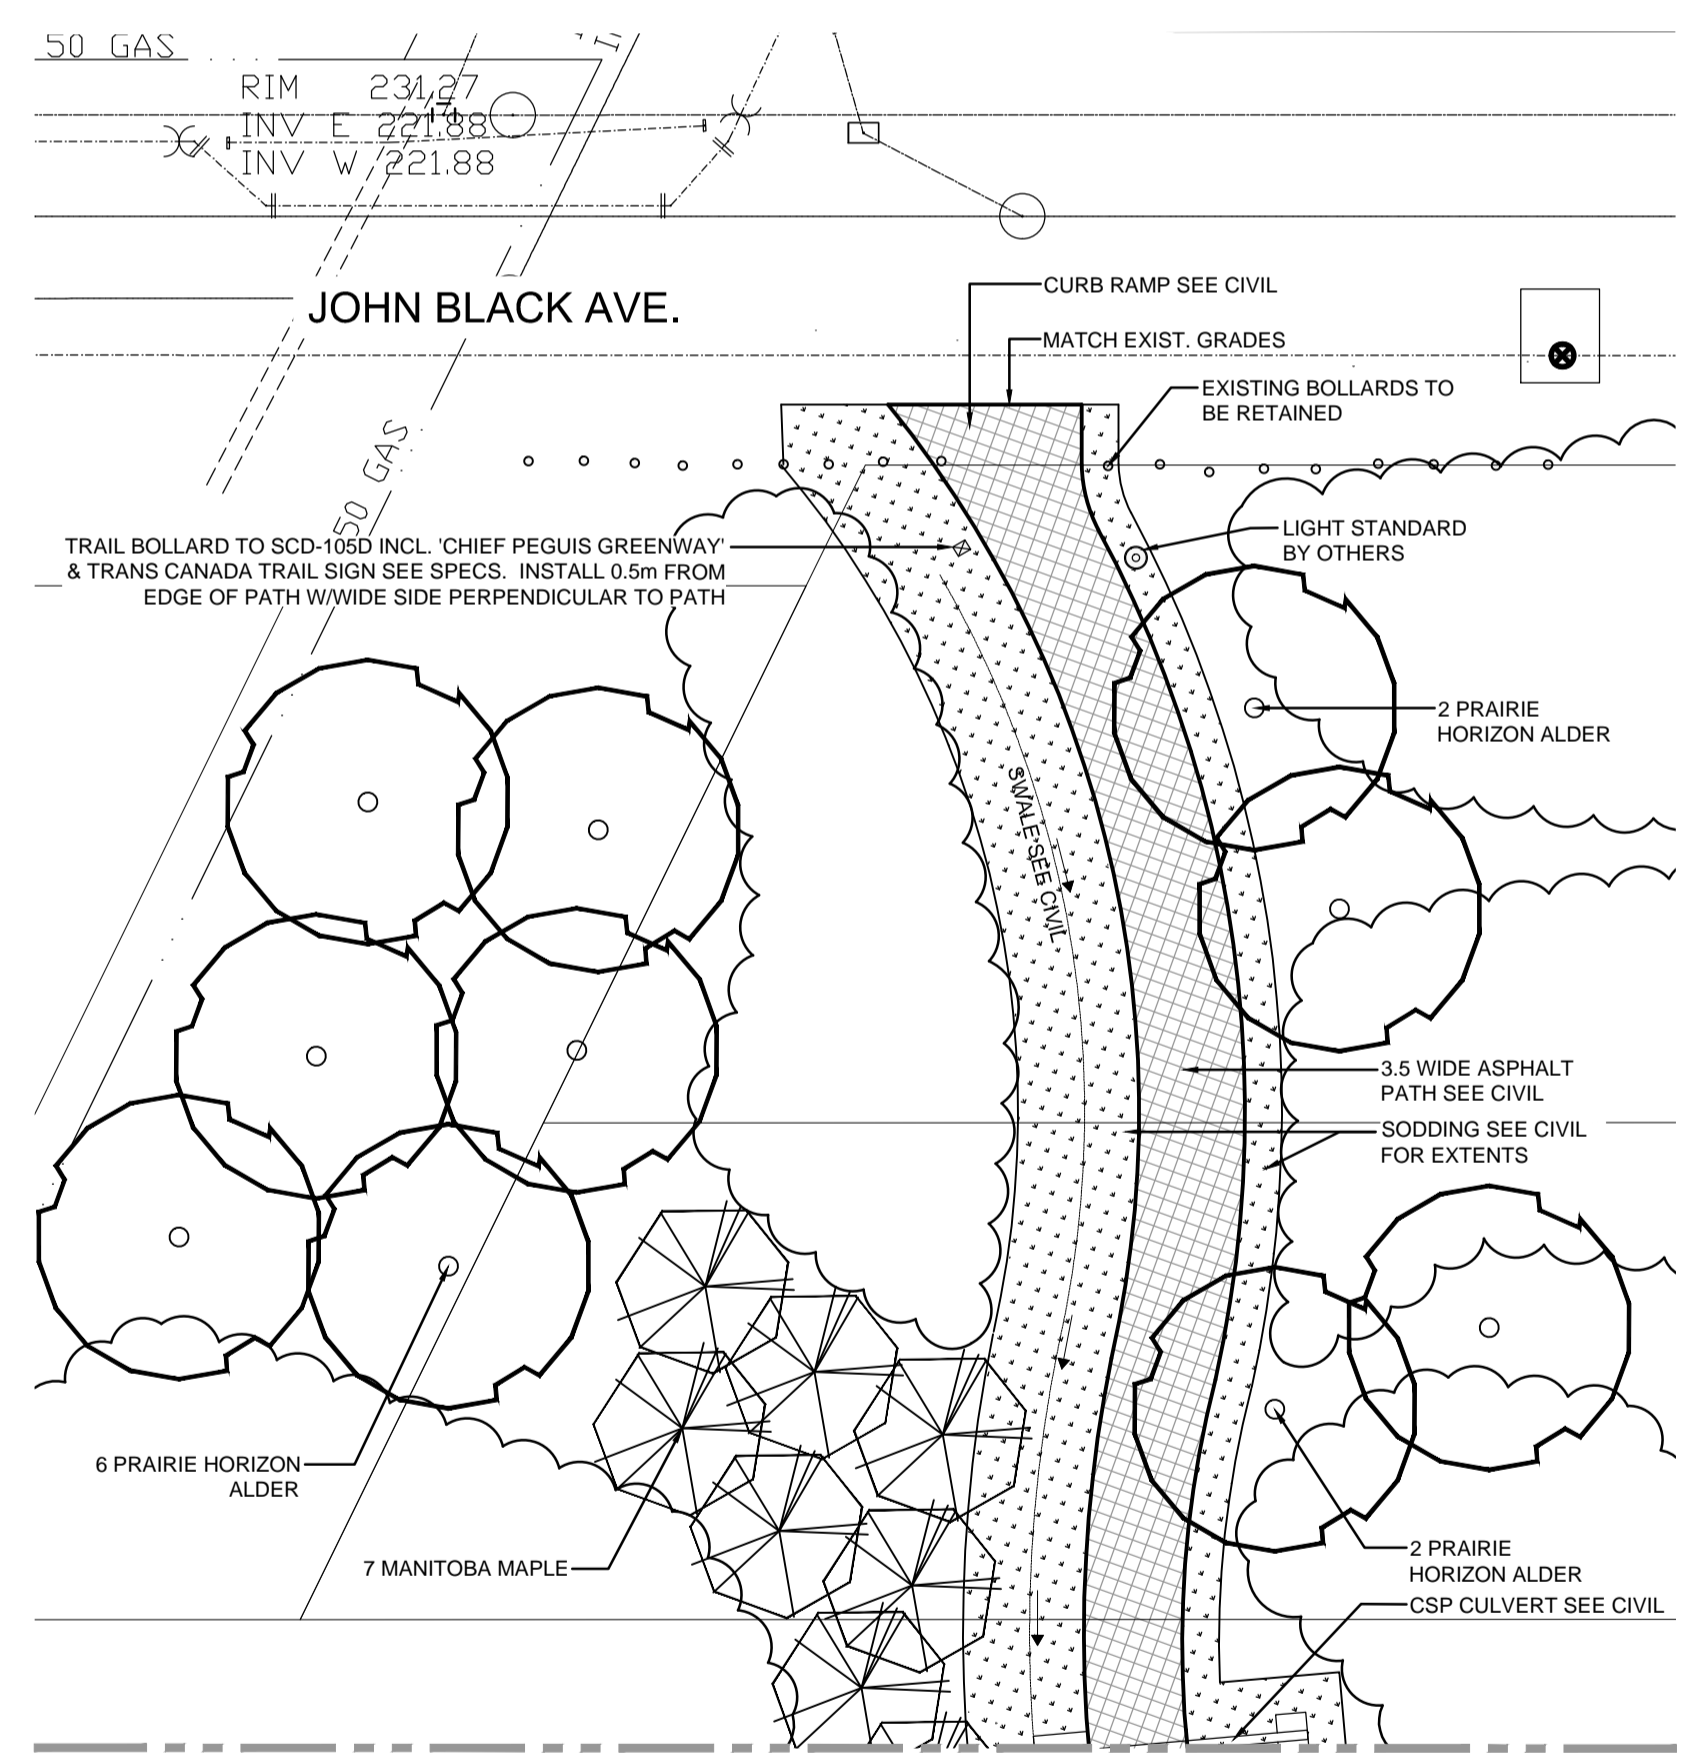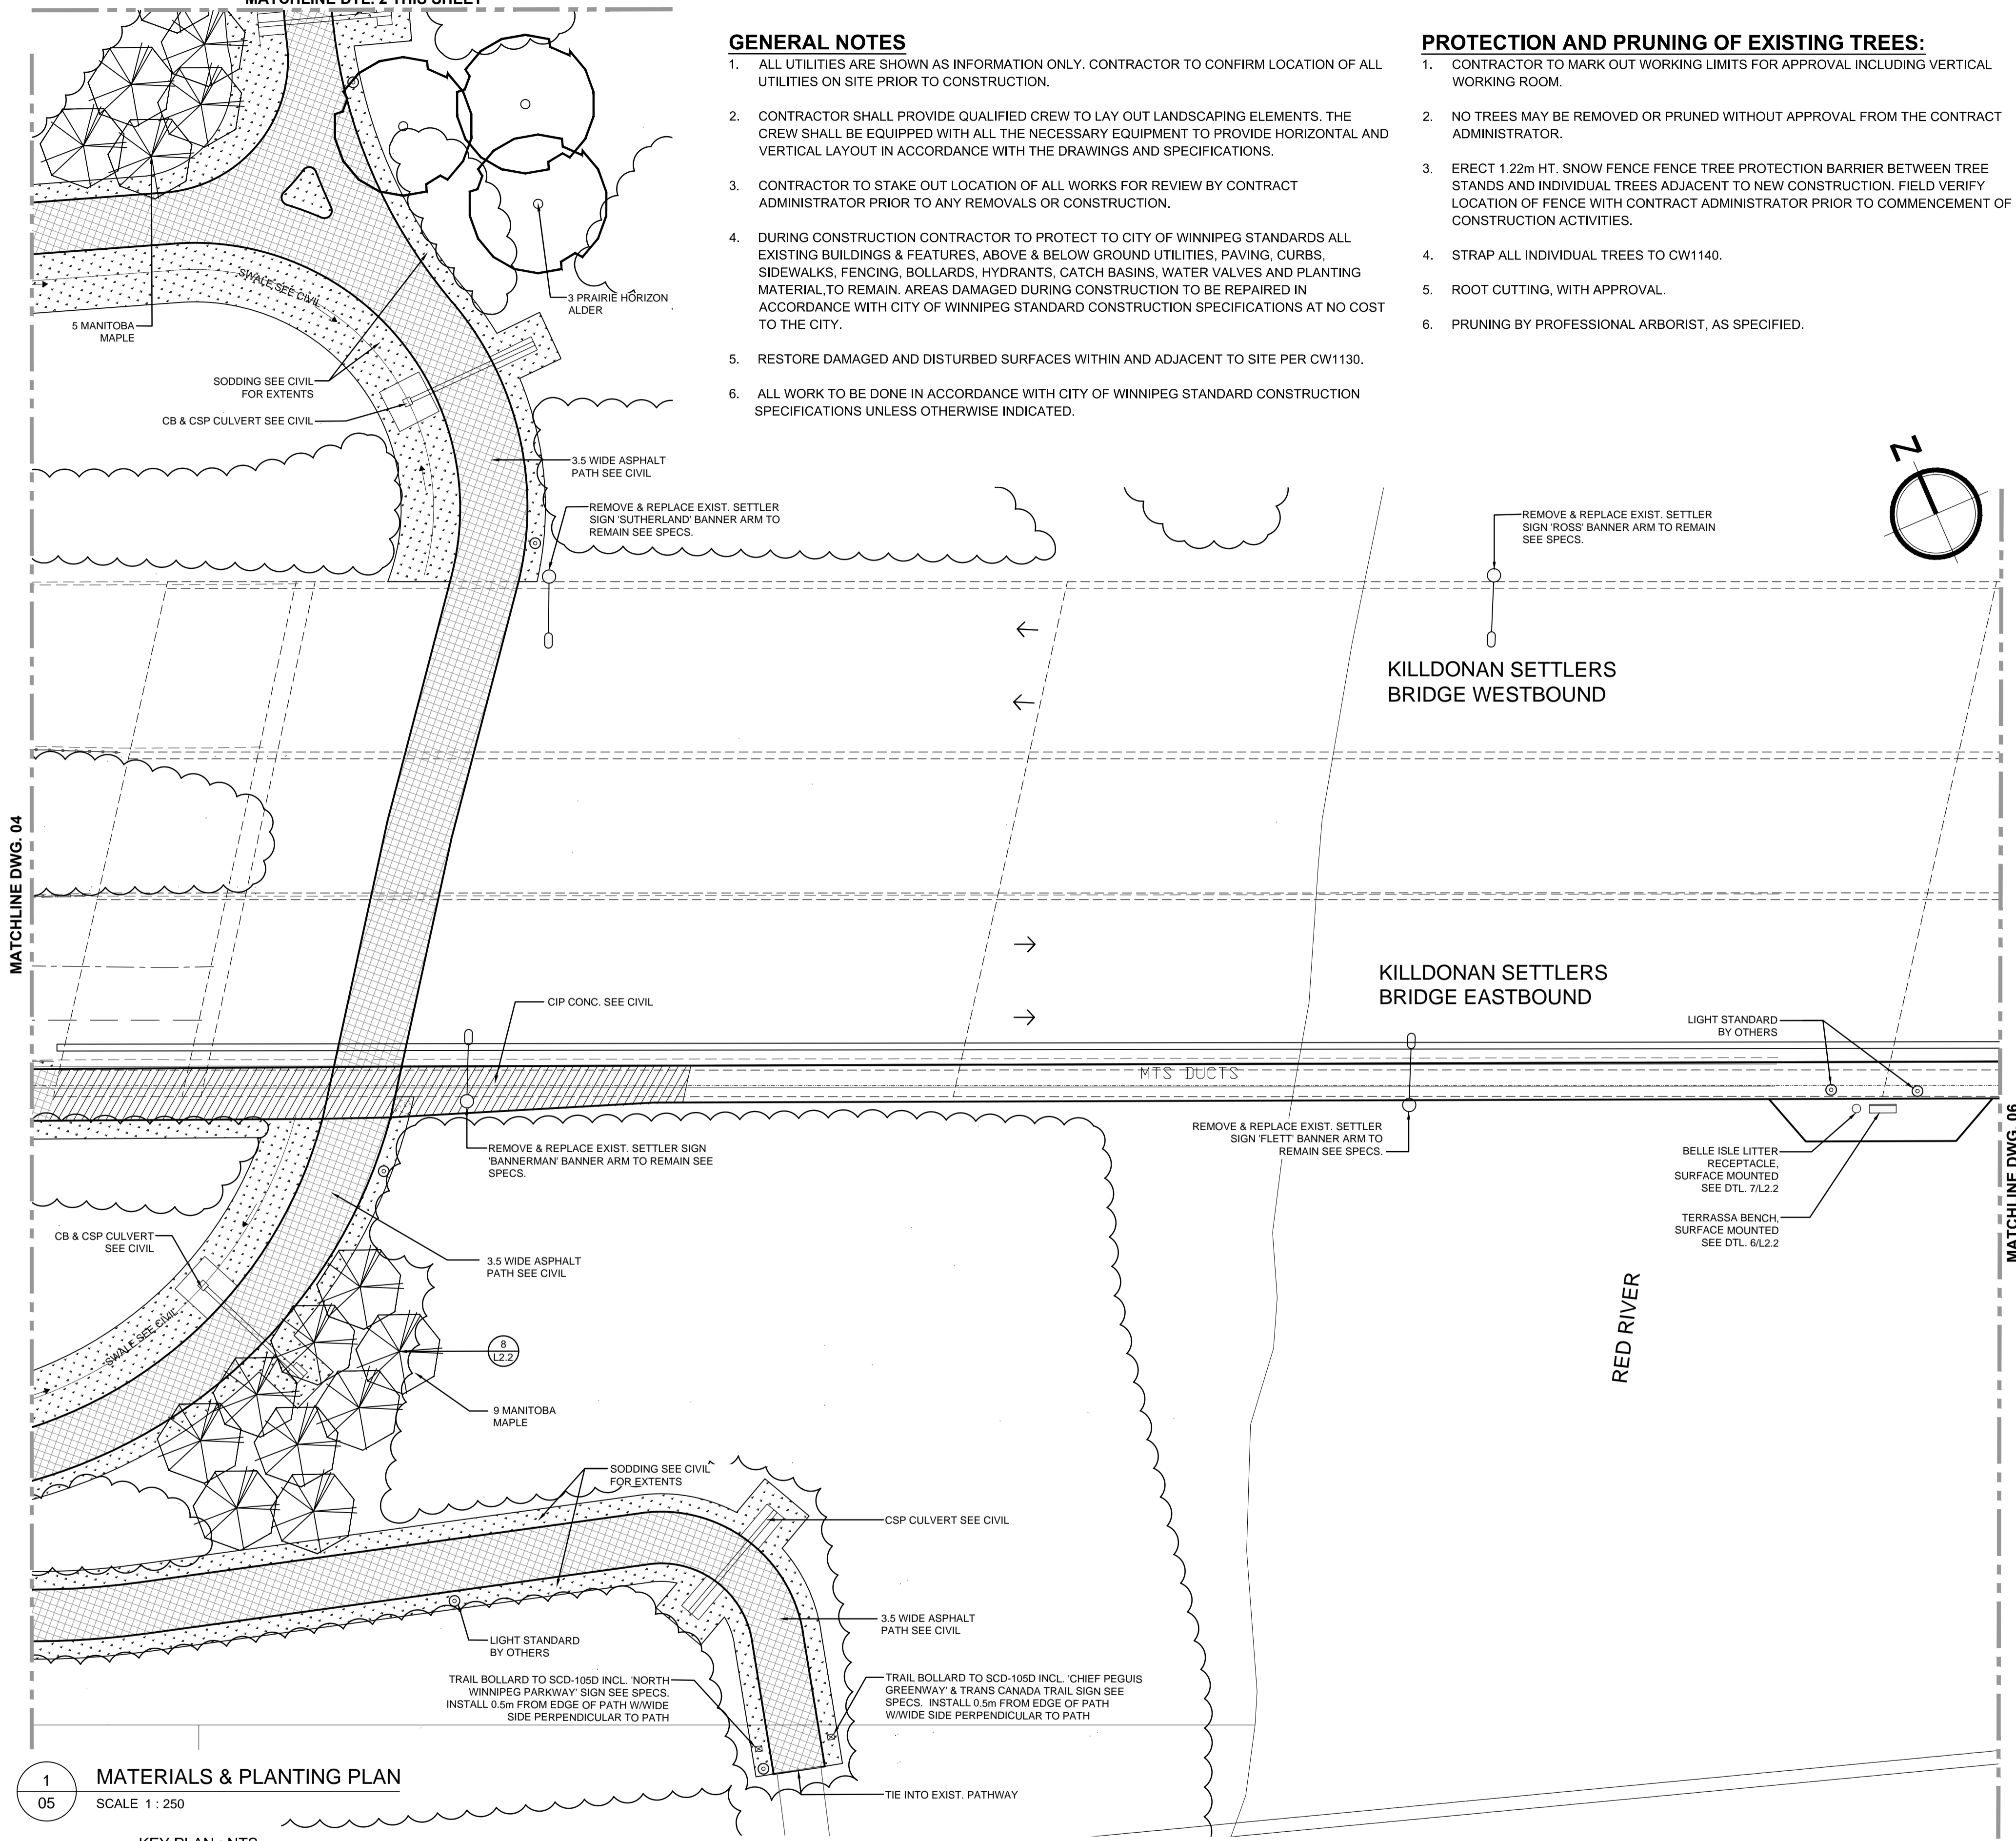

1 MATERIALS & PLANTING PLAN
05 SCALE 1 : 250

2 MATERIALS & PLANTING PLAN
05 SCALE 1 : 250

KEY PLAN : NTS

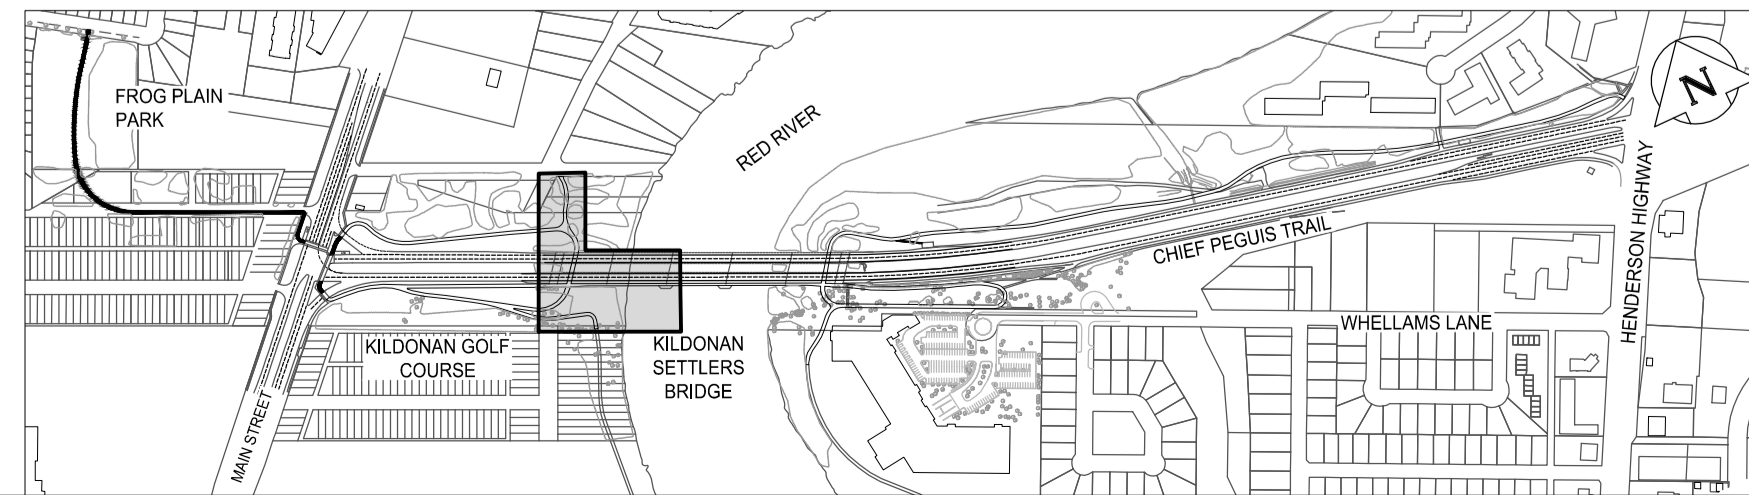

LOCATIONS APPROVED UNDERGROUND STRUCTURES

SIGNED BY	DATE		
7			
6			
5			
4			
3			
2	ISSUED FOR TENDER	21-FEB-18	JH
1	ISSUED FOR REVIEW	09-FEB-18	JH
0	ISSUED FOR 90% REVIEW	09-JAN-17	JH
NO. REVISIONS	DATE	BY	

HTFC
PLANNING & DESIGN
300-115 St. James Avenue East, Winnipeg, MB R2B 0P5
PHONE: 204-944-1907

DESIGNED BY: JH	CHECKED BY: GM
DRAWN BY: JH	APPROVED BY: GM
WORK SCALE: VERTICAL	RELEASED FOR CONSTRUCTION
DATE: 21 FEB 2018	DATE:

ENGINEER'S SEAL

 CONSULTANT ACAD DWG. NO. L1.5

THE CITY OF WINNIPEG
PUBLIC WORKS DEPARTMENT
ENGINEERING DIVISION

Winnipeg

CHIEF PEGUIS TRAIL - GREENWAY EXTENSION
FROG PLAIN WAY TO HENDERSON HIGHWAY

MATERIALS & PLANTING PLAN

CITY DRAWING NUMBER: SHEET 05 OF 13
 BID NO. 04-2018

Feb 26, 2018 - 10:33am - I:\Projects\2017\17-094 Chief Peguis Trail Greenway Extension\ACAD\17-094 Layout.dwg - tab:11.5
 I:\Projects\2017\17-094 Chief Peguis Trail Greenway Extension\ACAD\17-094 Layout.dwg - tab:11.5