

DEMOLITION NOTES

- ① REFER TO MECHANICAL DRAWING 1-0604M-M0005-001 FOR REMOVAL OF EXISTING EQUIPMENT AND PIPING.
- ② DEMOLISH EXISTING CONCRETE PAD AND GRADE BEAM.
- ③ EXISTING PILES (4 THUS) TO BE DEMOLISHED TO APPROXIMATELY 600mm BELOW FINISHED GRADE.
- ④ FILL EXCAVATION WITH CLEAN SOIL AND SOD IN ACCORDANCE WITH THE CITY OF WINNIPEG STANDARD CONSTRUCTION SPECIFICATIONS CW3540 AND CW3520 TO THE CONTRACT ADMINISTRATOR'S APPROVAL.

LEGEND:

- DEMOLITION
- EXISTING

1-640M-M0005	MECHANICAL DEMOLITION PLAN
DRAWING NUMBER	REFERENCE DRAWINGS




NO.	REVISIONS	DATE	DESIGN	CHECK
00	ISSUED FOR TENDER AND CONSTRUCTION	2019/11/04	TD	TD

SNC-LAVALIN

SNC-LAVALIN INC.
 148 Nature Park Way
 Winnipeg, MB, Canada R3P 0X7
 204-786-8080

DESIGNED BY: T. DEGER
 CHECKED BY: T. DEGER
 DRAWN BY: K. McINTOSH
 APPROVED BY: D. BECKER
 SCALE: 1:50
 ISSUED FOR CONSTRUCTION BY: A. WEISS
 DATE: 2019/06/26
 DATE: 2019/11/04
 CONSULTANT NO.: 661472-0000-43DD-0001

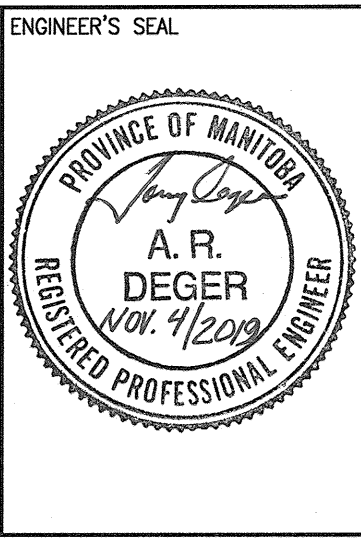

THE CITY OF WINNIPEG
 WATER AND WASTE DEPARTMENT

MCPHILLIPS PUMPING STATION
 MAIN PUMPING STATION BUILDING
 STRUCTURAL
 CHILLER EQUIPMENT PAD
 DEMOLITION DETAILS

CITY DRAWING NUMBER	SHEET	REV.	SIZE
1-0640A-S0003	001	00	A1