



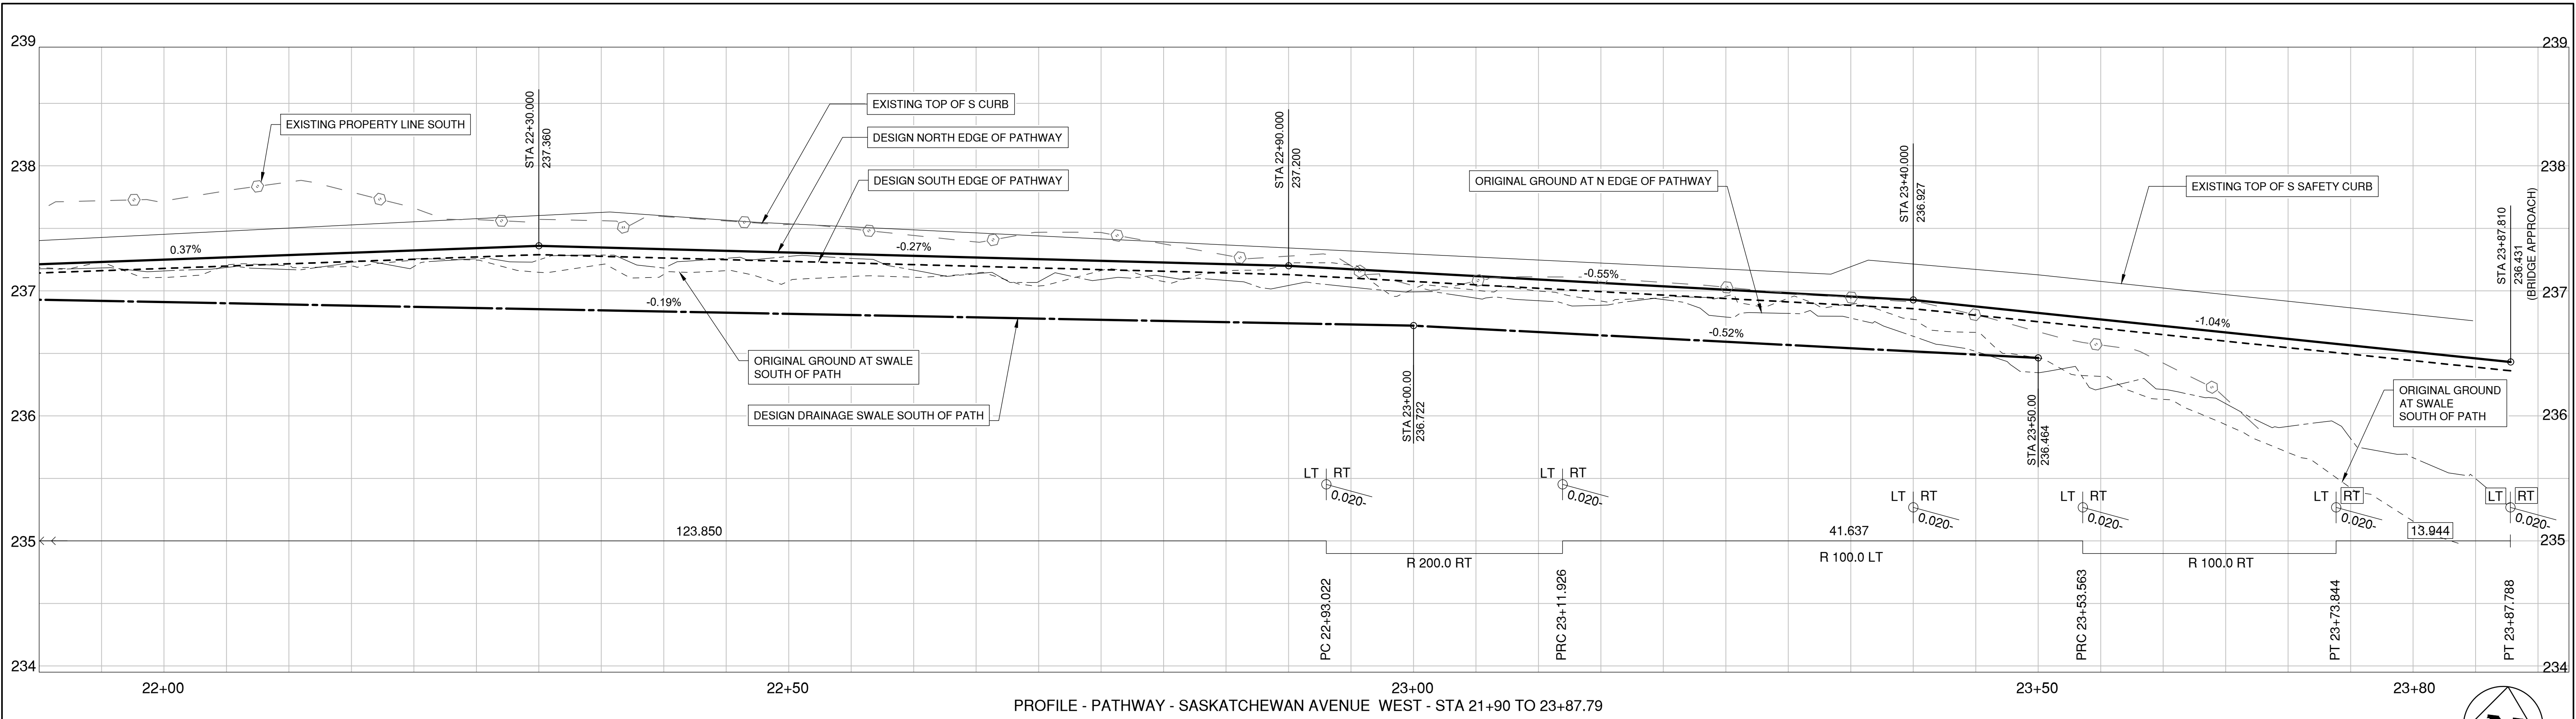

PROFILE - PATHWAY - SASKATCHEWAN AVENUE WEST - STA 21+90 TO 23+87.79

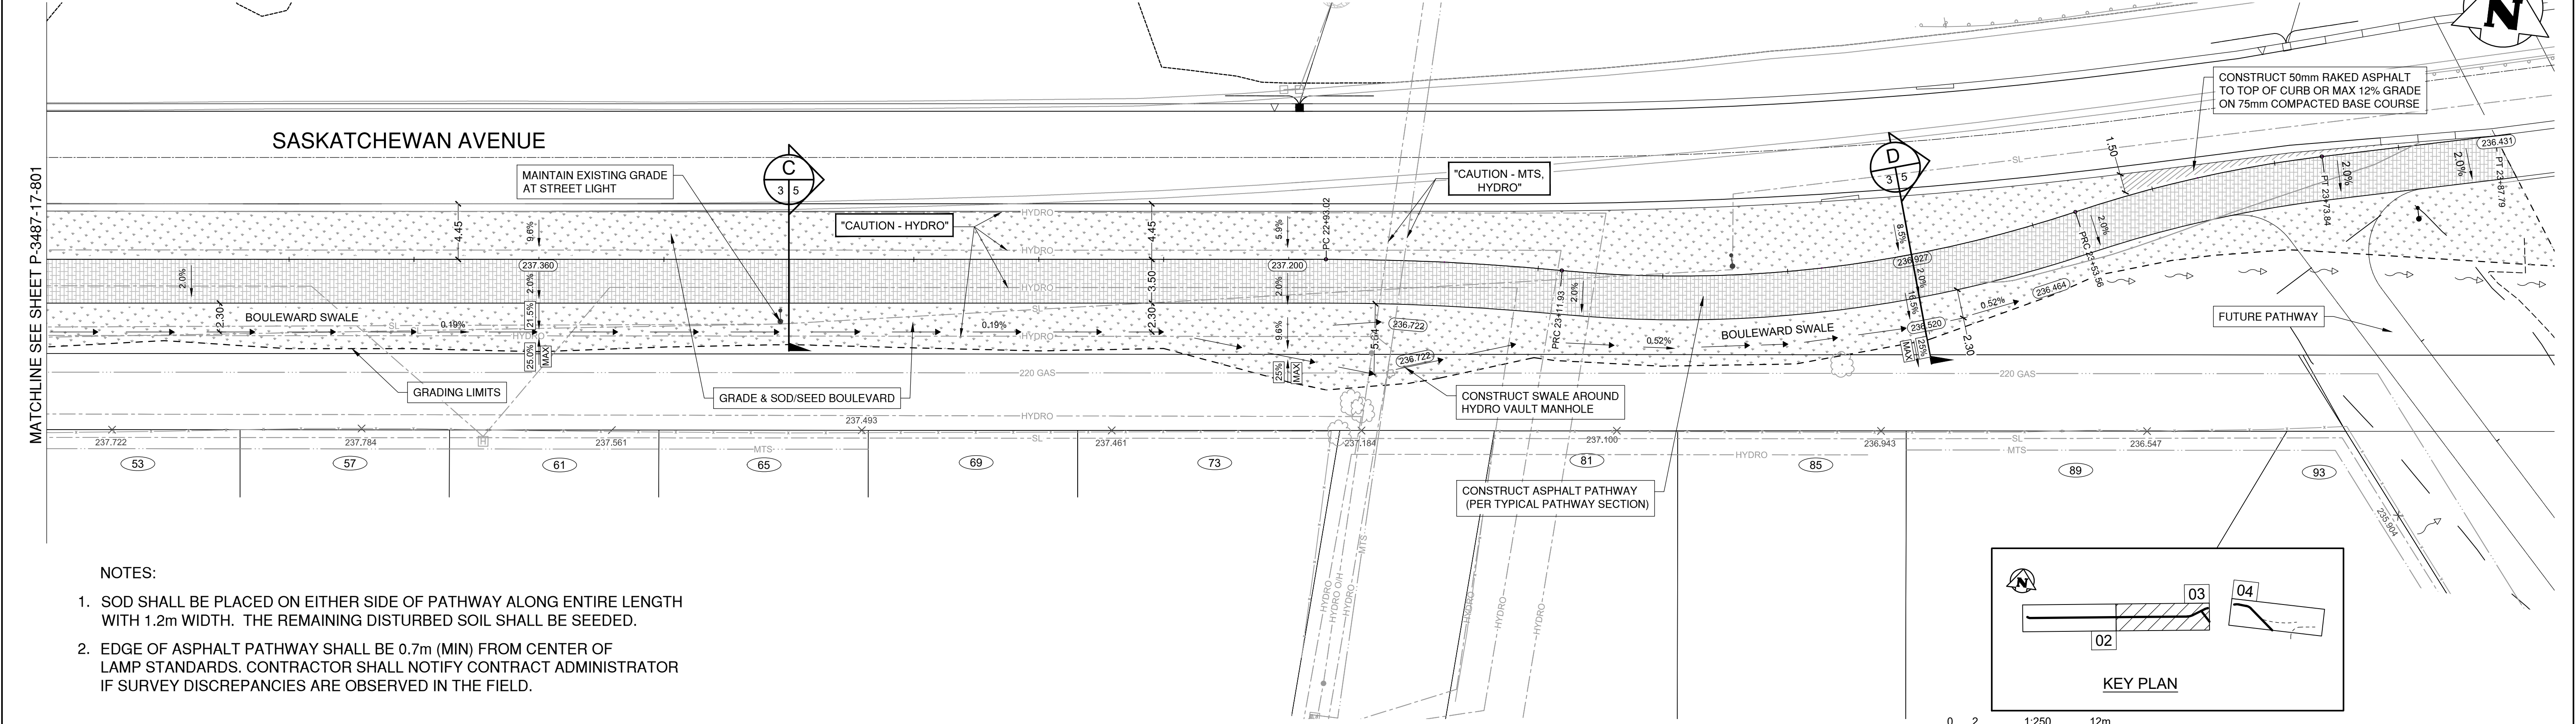

PLAN - PATHWAY - SASKATCHEWAN AVENUE WEST - STA 21+90 TO 23+87.79

NOTES:

- SOD SHALL BE PLACED ON EITHER SIDE OF PATHWAY ALONG ENTIRE LENGTH WITH 1.2m WIDTH. THE REMAINING DISTURBED SOIL SHALL BE SEEDDED.
- EDGE OF ASPHALT PATHWAY SHALL BE 0.7m (MIN) FROM CENTER OF LAMP STANDARDS. CONTRACTOR SHALL NOTIFY CONTRACT ADMINISTRATOR IF SURVEY DISCREPANCIES ARE OBSERVED IN THE FIELD.

150 WM	WATERMAIN	150 WM		SWALE		RIGHT-OF-WAY	LOCATION APPROVED UNDERGROUND STRUCTURES	B.M. CITY OF WINNIPEG 40-42 ELEV. 238.985			CONSULTANT DRAWING NO. 1600070700-C802	 THE CITY OF WINNIPEG PUBLIC WORKS DEPARTMENT ENGINEERING DIVISION	SASKATCHEWAN AT STURGEON CREEK BRIDGE CONSTRUCTION	CITY DRAWING NUMBER P3487-17-802 SHEET 3 OF 5
400 FM	FEEDERMAIN	400 FM		MANHOLE		GAS								
300 LDS	LAND DRAINAGE SEWER	300 LDS		CATCHBASIN		HYDRO								
250 WWS	WASTEWATER SEWER	250 WWS		HYDRO BOX		MTS								
300 CS	COMBINED SEWER	300 CS		HYDRO POLE		SOD								
200 FCM	FORCEMAIN	200 FCM		LIGHT STANDARD		ELEVATION								
	JUNCTIONS			ANCHOR		ROAD ASPHALT								
	HYDRANT			TREE		CURB								
	VALVE			SURVEY BAR		PATH ASPHALT								
	CURB STOP			SIGNAL CONTROLLER		CONCRETE								
EXISTING	LEGEND-PLAN	PROPOSED	EXISTING	LEGEND-PLAN	PROPOSED	EXISTING	LEGEND-PLAN	PROPOSED						
NOTE: LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE. BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.							SUPV. U/G STRUCTURES COMMITTEE	DATE						
							1	ISSUED FOR PCN No. 6	19.04.29	DRA				
							NO	REVISIONS	DATE	BY	DATE 19.01.14			
							DAMIR MUHURDAREVIC, P.ENG. BRIDGE PROJECTS ENGINEER							