


NOTES :
 CONSTRUCTION STANDARDS
 TO BE CONSTRUCTED IN ACCORDANCE WITH MANITOBA HYDRO DISTRIBUTION AND SUBTRANSMISSION STANDARDS. LATEST REVISION. NO MAJOR CHANGE SHALL BE MADE WITHOUT APPROVAL OF THE DESIGN ENGINEER OR DELEGATE.
 SURVEYS TO STAKE OUT SURVEY MONUMENTS, IF IN THE VICINITY OF THE NEW CONSTRUCTION TO PREVENT DAMAGE OR LOSS.

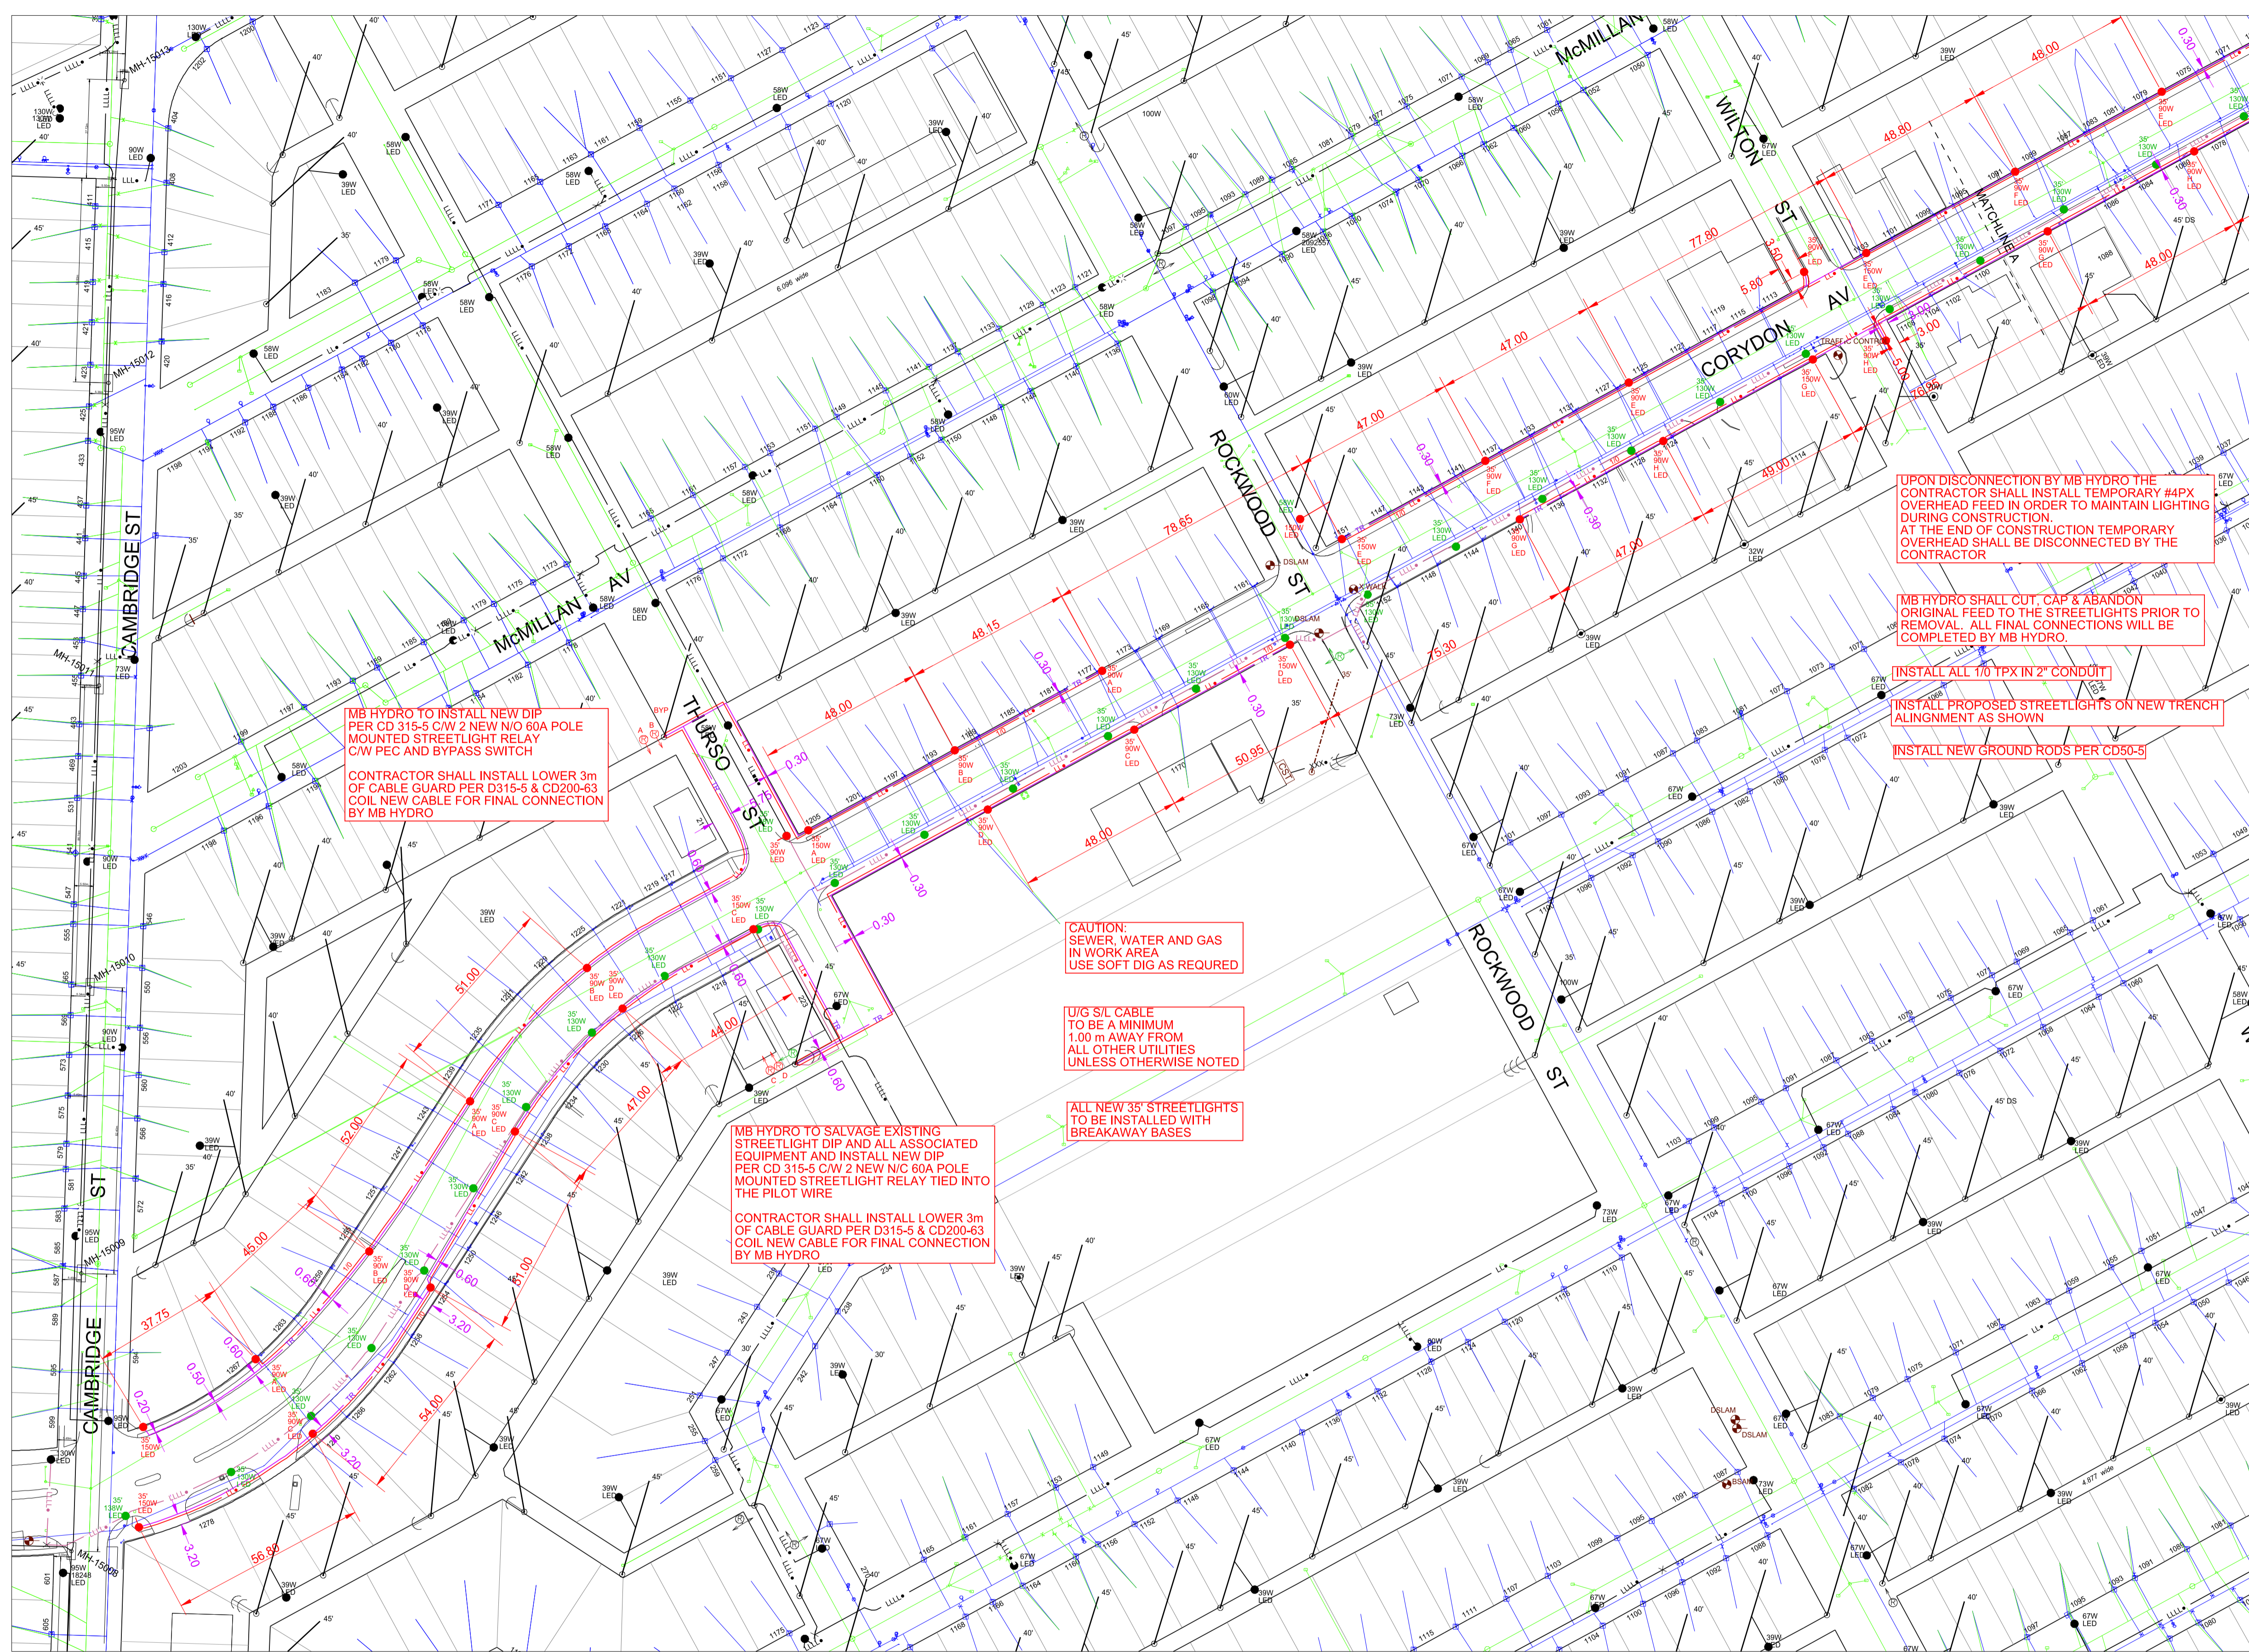

MB HYDRO TO INSTALL NEW DIP PER CD 315-5 C/W 2 NEW N/O 60A POLE MOUNTED STREETLIGHT RELAY C/W PEC AND BYPASS SWITCH
 CONTRACTOR SHALL INSTALL LOWER 3m OF CABLE GUARD PER D315-5 & CD200-63 COIL NEW CABLE FOR FINAL CONNECTION BY MB HYDRO

MB HYDRO TO SALVAGE EXISTING STREETLIGHT DIP AND ALL ASSOCIATED EQUIPMENT AND INSTALL NEW DIP PER CD 315-5 C/W 2 NEW N/C 60A POLE MOUNTED STREETLIGHT RELAY TIED INTO THE PILOT WIRE
 CONTRACTOR SHALL INSTALL LOWER 3m OF CABLE GUARD PER D315-5 & CD200-63 COIL NEW CABLE FOR FINAL CONNECTION BY MB HYDRO

CAUTION: SEWER, WATER AND GAS IN WORK AREA USE SOFT DIG AS REQUIRED

U/G S/L CABLE TO BE A MINIMUM 1.00 m AWAY FROM ALL OTHER UTILITIES UNLESS OTHERWISE NOTED

ALL NEW 35' STREETLIGHTS TO BE INSTALLED WITH BREAKAWAY BASES

UPON DISCONNECTION BY MB HYDRO THE CONTRACTOR SHALL INSTALL TEMPORARY #4PX OVERHEAD FEED IN ORDER TO MAINTAIN LIGHTING DURING CONSTRUCTION. AT THE END OF CONSTRUCTION TEMPORARY OVERHEAD SHALL BE DISCONNECTED BY THE CONTRACTOR

MB HYDRO SHALL CUT, CAP & ABANDON ORIGINAL FEED TO THE STREETLIGHTS PRIOR TO REMOVAL. ALL FINAL CONNECTIONS WILL BE COMPLETED BY MB HYDRO.

INSTALL ALL 1/0 TPX IN 2" CONDUIT

INSTALL PROPOSED STREETLIGHTS ON NEW TRENCH ALIGNMENT AS SHOWN

INSTALL NEW GROUND RODS PER CD50-5

PRELIMINARY
 NOT TO BE USED FOR CONSTRUCTION

REEL NUMBER	MANUFACTURER	MANUFACTURE DATE


AUTHORITY	NOTIFIED	NOT REQ'D	OBTAINED
DISTRICT	February 4, 2020		February ??, 2020
C.O.W./MUNICIPAL	February 4, 2020		February ??, 2020
M.T.S.		X	
GAS		X	
SHAW		X	
EASEMENTS		X	
COMMUNICATIONS		X	
S.C.C.		X	
DEPT. OF HIGHWAYS		X	

CONTACT	NAME	PHONE NUMBER	E-MAIL ADDRESS
DESIGN	IAN MCCALLUM	204-470-3154	imccallum@hydro.mb.ca
DESIGN ENGINEER	MATT SINGER	204-360-3201	msinger@hydro.mb.ca
PORTFOLIO MANAGEMENT	DARIN WACH	204-360-3082	dwach@hydro.mb.ca
ESA	TIM LOEB	204-360-5157	TLoeb@hydro.mb.ca
U/G CONSTRUCTION	BILL AMMETER	204-360-7019	bammeter@hydro.mb.ca
OH CONSTRUCTION	WAYNE IRELAND	204-360-5786	wireland@hydro.mb.ca
HYDRO GAS			
SHAW			
MTS			
S/L MAINTENANCE	DARREN TABAK	204-360-7521	dtabak@hydro.mb.ca
DISTRICT ENG TECH	GEORGE WEDDALL	204-360-7451	gweddall@hydro.mb.ca
COW CONTACT	ANDREW CONDON	204-619-0035	acondon@winnipeg.ca

CONTACT "CLICK BEFORE YOU DIG MANITOBA" AT
ClickBeforeYouDigMB.com
THREE FULL WORKING DAYS
 PRIOR TO CONSTRUCTION FOR LOCATION OF EXISTING WATER, WASTEWATER, LAND DRAINAGE UTILITIES AND MANITOBA HYDRO UTILITIES

FOR CLEARANCE OF EXISTING WATER & WASTE DEPARTMENT PLANT CONTACT THE SURVEY & INSPECTION BRANCH 48 HOURS PRIOR TO CONSTRUCTION AT 986-3322

NOTE: INDICATION OF ALL UNDERGROUND UTILITIES IS FOR ILLUSTRATIVE PURPOSES ONLY. CONTACT THE APPLICABLE UTILITIES FOR SPECIFIC PLANT LOCATIONS AND CLEARANCES.

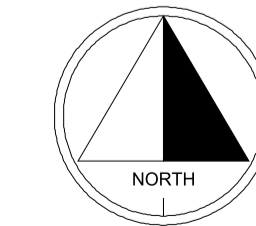


NO.	DATE	REVISION	BY	KD.	APP.

DRAWING NUMBER	506, 509N15	REFERENCE DRAWINGS	UGS APPROVAL DRAWING	DRAWN	DKGI
CHECK					
SCALE	1:1000				
DATE	2020 01 22				

AREA NUMBER	5202	MANITOBA HYDRO
STATION NUMBER	1505	DISTRIBUTION PLANNING & DESIGN
FEEDER NUMBER	506, 509N15	WO# P:32959 NETWORK # 4306085
SYSTEM VOLTAGE	4 KV	CSC: CITY CENTRE
		SYSTEM IMPROVEMENT PROJECT
		CHANGE OUT OF SL STANDARDS AND BASES
		INSTALLATION OF NEW U/G S/L CABLE AND DIPS
		AND ALL ASSOCIATED SALVAGE ON CORYDON AVE
		1-04707-DD-50000-0493

FOR MICROFILM USE ONLY

NOTES :
CONSTRUCTION STANDARDS
TO BE CONSTRUCTED IN ACCORDANCE WITH MANITOBA HYDRO DISTRIBUTION AND SUBTRANSMISSION STANDARDS, LATEST REVISION, NO MAJOR CHANGE SHALL BE MADE WITHOUT APPROVAL OF THE DESIGN ENGINEER OR DELEGATE.
SURVEYS TO STAKE OUT SURVEY MONUMENTS, IF IN THE VICINITY OF THE NEW CONSTRUCTION TO PREVENT DAMAGE OR LOSS.

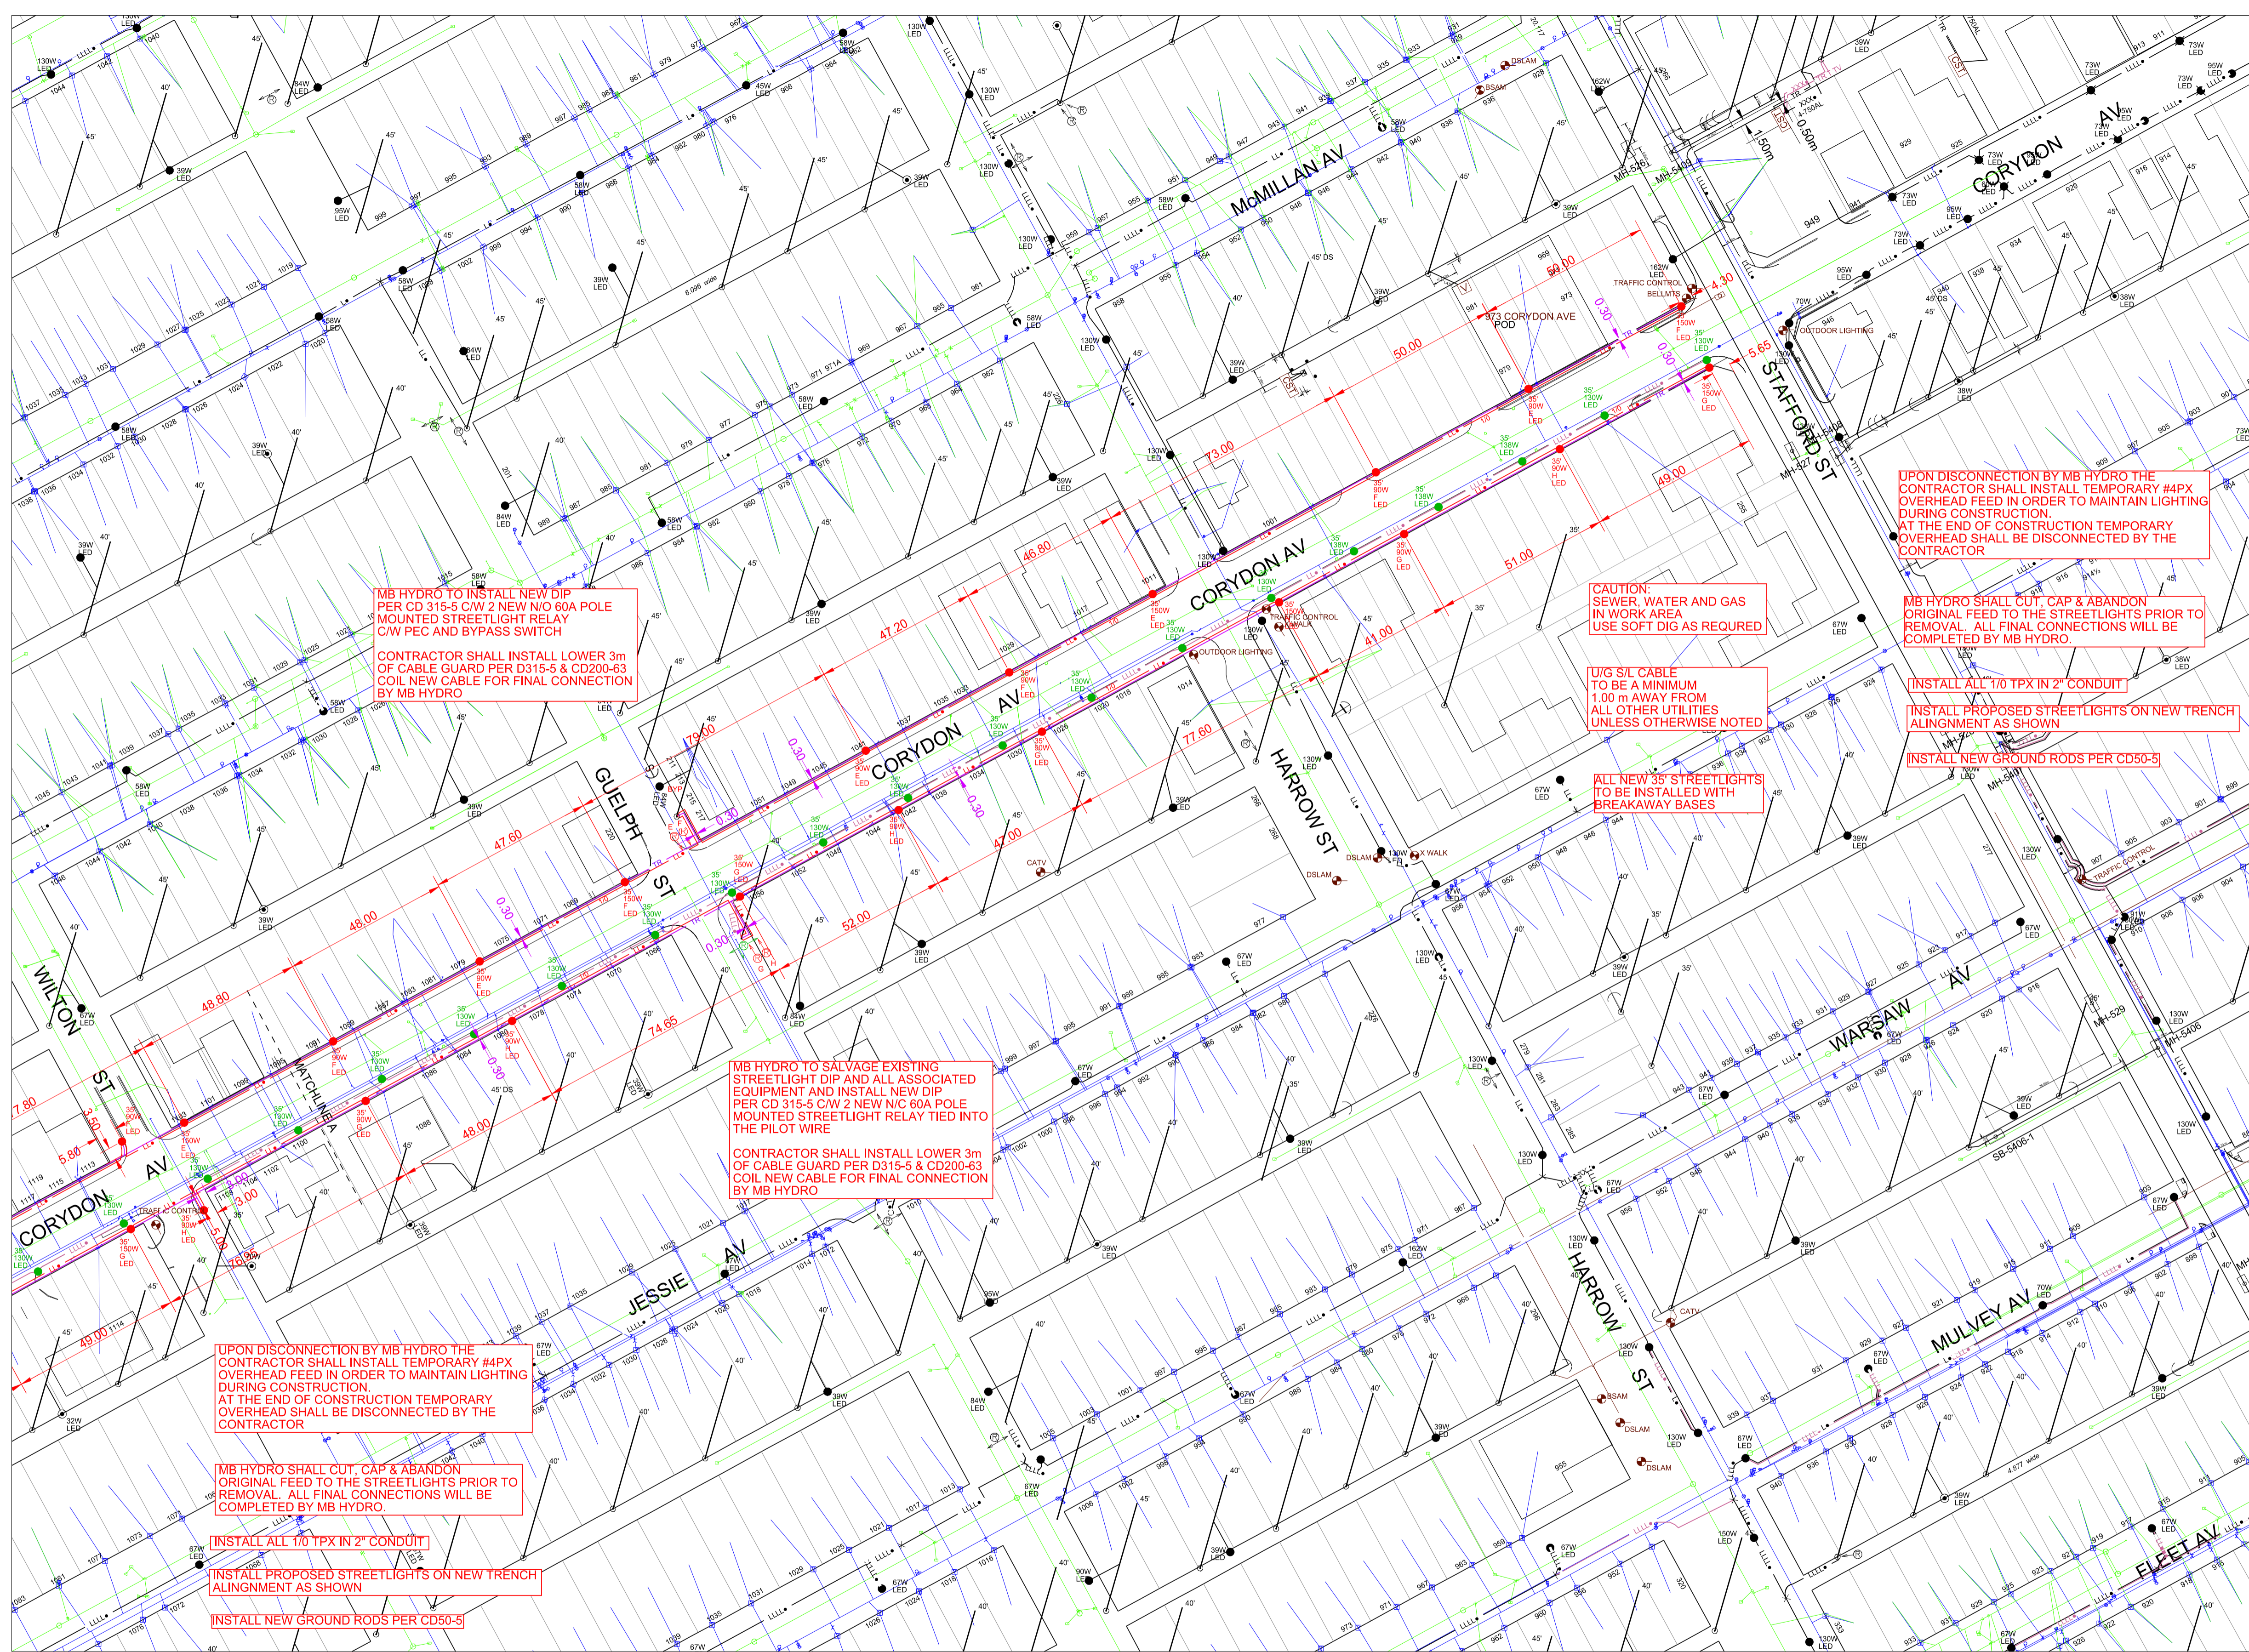

PRELIMINARY
NOT TO BE USED FOR CONSTRUCTION

REEL NUMBER	MANUFACTURER	MANUFACTURE DATE


AUTHORITY	NOTIFIED	NOT REQ'D	OBTAINED
DISTRICT	February 4, 2020		February ??, 2020
C.O.W / MUNICIPAL	February 4, 2020		February ??, 2020
M.T.S.		X	
GAS		X	
SHAW		X	
EASEMENTS		X	
COMMUNICATIONS		X	
S.C.C.		X	
DEPT. OF HIGHWAYS		X	

CONTACT	NAME	PHONE NUMBER	E-MAIL ADDRESS
DESIGN	IAN MCCALLUM	204-470-3154	imccallum@hydro.mb.ca
DESIGN ENGINEER	MATT SINGER	204-360-3201	msinger@hydro.mb.ca
PORTFOLIO MANAGEMENT	DARIN WACH	204-360-3082	dwach@hydro.mb.ca
ESA	TIM LOEB	204-360-5157	TLoeb@hydro.mb.ca
U/G CONSTRUCTION	BILL AMMETER	204-360-7019	bammeter@hydro.mb.ca
O/H CONSTRUCTION	WAYNE IRELAND	204-360-5786	wireland@hydro.mb.ca
HYDRO GAS			
SHAW			
MTS			
S/L MAINTENANCE	DARREN TABAK	204-360-7521	dtabak@hydro.mb.ca
DISTRICT ENG TECH	GEORGE WEDDALL	204-360-7451	gweddall@hydro.mb.ca
COW CONTACT	ANDREW CONDON	204-619-0035	acondon@winnipeg.ca

CONTACT "CLICK BEFORE YOU DIG MANITOBA" AT
ClickBeforeYouDigMB.com
THREE FULL WORKING DAYS
PRIOR TO CONSTRUCTION FOR LOCATION OF EXISTING WATER, WASTEWATER, LAND DRAINAGE UTILITIES AND MANITOBA HYDRO UTILITIES

FOR CLEARANCE OF EXISTING WATER & WASTE DEPARTMENT PLANT CONTACT THE SURVEY & INSPECTION BRANCH 48 HOURS PRIOR TO CONSTRUCTION AT 986-3322

NOTE: INDICATION OF ALL UNDERGROUND UTILITIES IS FOR ILLUSTRATIVE PURPOSES ONLY, CONTACT THE APPLICABLE UTILITIES FOR SPECIFIC PLANT LOCATIONS AND CLEARANCES.



NO.	DATE	REVISION	BY	CKD.	APP.

DRAWING NUMBER	506, 509N15	REFERENCE DRAWINGS	UGS APPROVAL DRAWING	DRAWN	DKGI
CHECK		SCALE	1:1000	DATE	2020 01 22

AREA NUMBER	5202	MANITOBA HYDRO
STATION NUMBER	1505	DISTRIBUTION PLANNING & DESIGN
FEEDER NUMBER	506, 509N15	WO# P:32959 NETWORK # 4306085
SYSTEM VOLTAGE	4 KV	CSC: CITY CENTRE
		SYSTEM IMPROVEMENT PROJECT
		CHANGE OUT OF SL STANDARDS AND BASES
		INSTALLATION OF NEW U/G S/L CABLE AND DIPS
		AND ALL ASSOCIATED SALVAGE ON CORYDON AVE
		1-04707-DD-50000-0493