
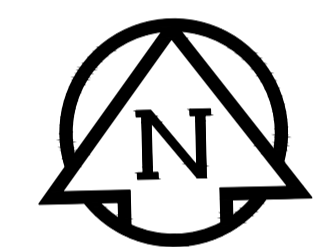


**NOTES**

- ADJUST MH AND CB RIMS TO NEW GRADES.
- LAMP STANDARDS, HYDRO POLES, AND ANCHORS THAT REQUIRE TEMPORARY SUPPORT AND BACKFILL TO BE DONE SO AT THE EXPENSE OF THE CONTRACTOR AS NECESSARY.
- CONTRACTOR TO REGRADE/RENEW EXISTING PRIVATE SIDEWALKS TO LIMITS AS SHOWN. SIDEWALKS TO BE RENEWED WITH CONCRETE UNLESS NOTED OTHERWISE.
- CONTRACTOR TO TAKE PRECAUTIONARY STEPS TO PROTECT EXISTING TREES WITHIN THE LIMITS OF CONSTRUCTION FROM DAMAGE FROM CONSTRUCTION ACTIVITIES AS OUTLINED IN THE SPECIFICATIONS.
- CONTRACTOR TO CONFIRM THE LOCATION OF ALL UTILITIES/SERVICES IN THE FIELD PRIOR TO CONSTRUCTION.
- CB SD-023 & SD-024 OFFSETS ARE DIMENSIONED TO BOC. CB SD-025 OFFSETS ARE DIMENSIONED O/C.
- IN GENERAL, PAVEMENT AND SIDEWALK AREAS TO BE REMOVED. MATCH RECONSTRUCTION LIMITS.
- REFER TO TENDER FOR DETAILS REGARDING TRAFFIC MANAGEMENT.
- EXISTING LONG WATER SERVICES TO BE INSULATED (SD-018). REFER TO TENDER FOR FURTHER REQUIREMENTS AND AS NOTED IN PLAN.
- ALL COSTS, MATERIALS AND LABOR ASSOCIATED WITH THE RESTORATION OF THE CATHODIC PROTECTED WATERMAIN WILL BE RESPONSIBILITY OF THE CONTRACTOR.
- MATCH EXISTING GRADES AT DOOR SILLS.
- ADD 200.000 m TO ABBREVIATED ELEVATIONS TO OBTAIN GEODETIC ELEVATIONS.

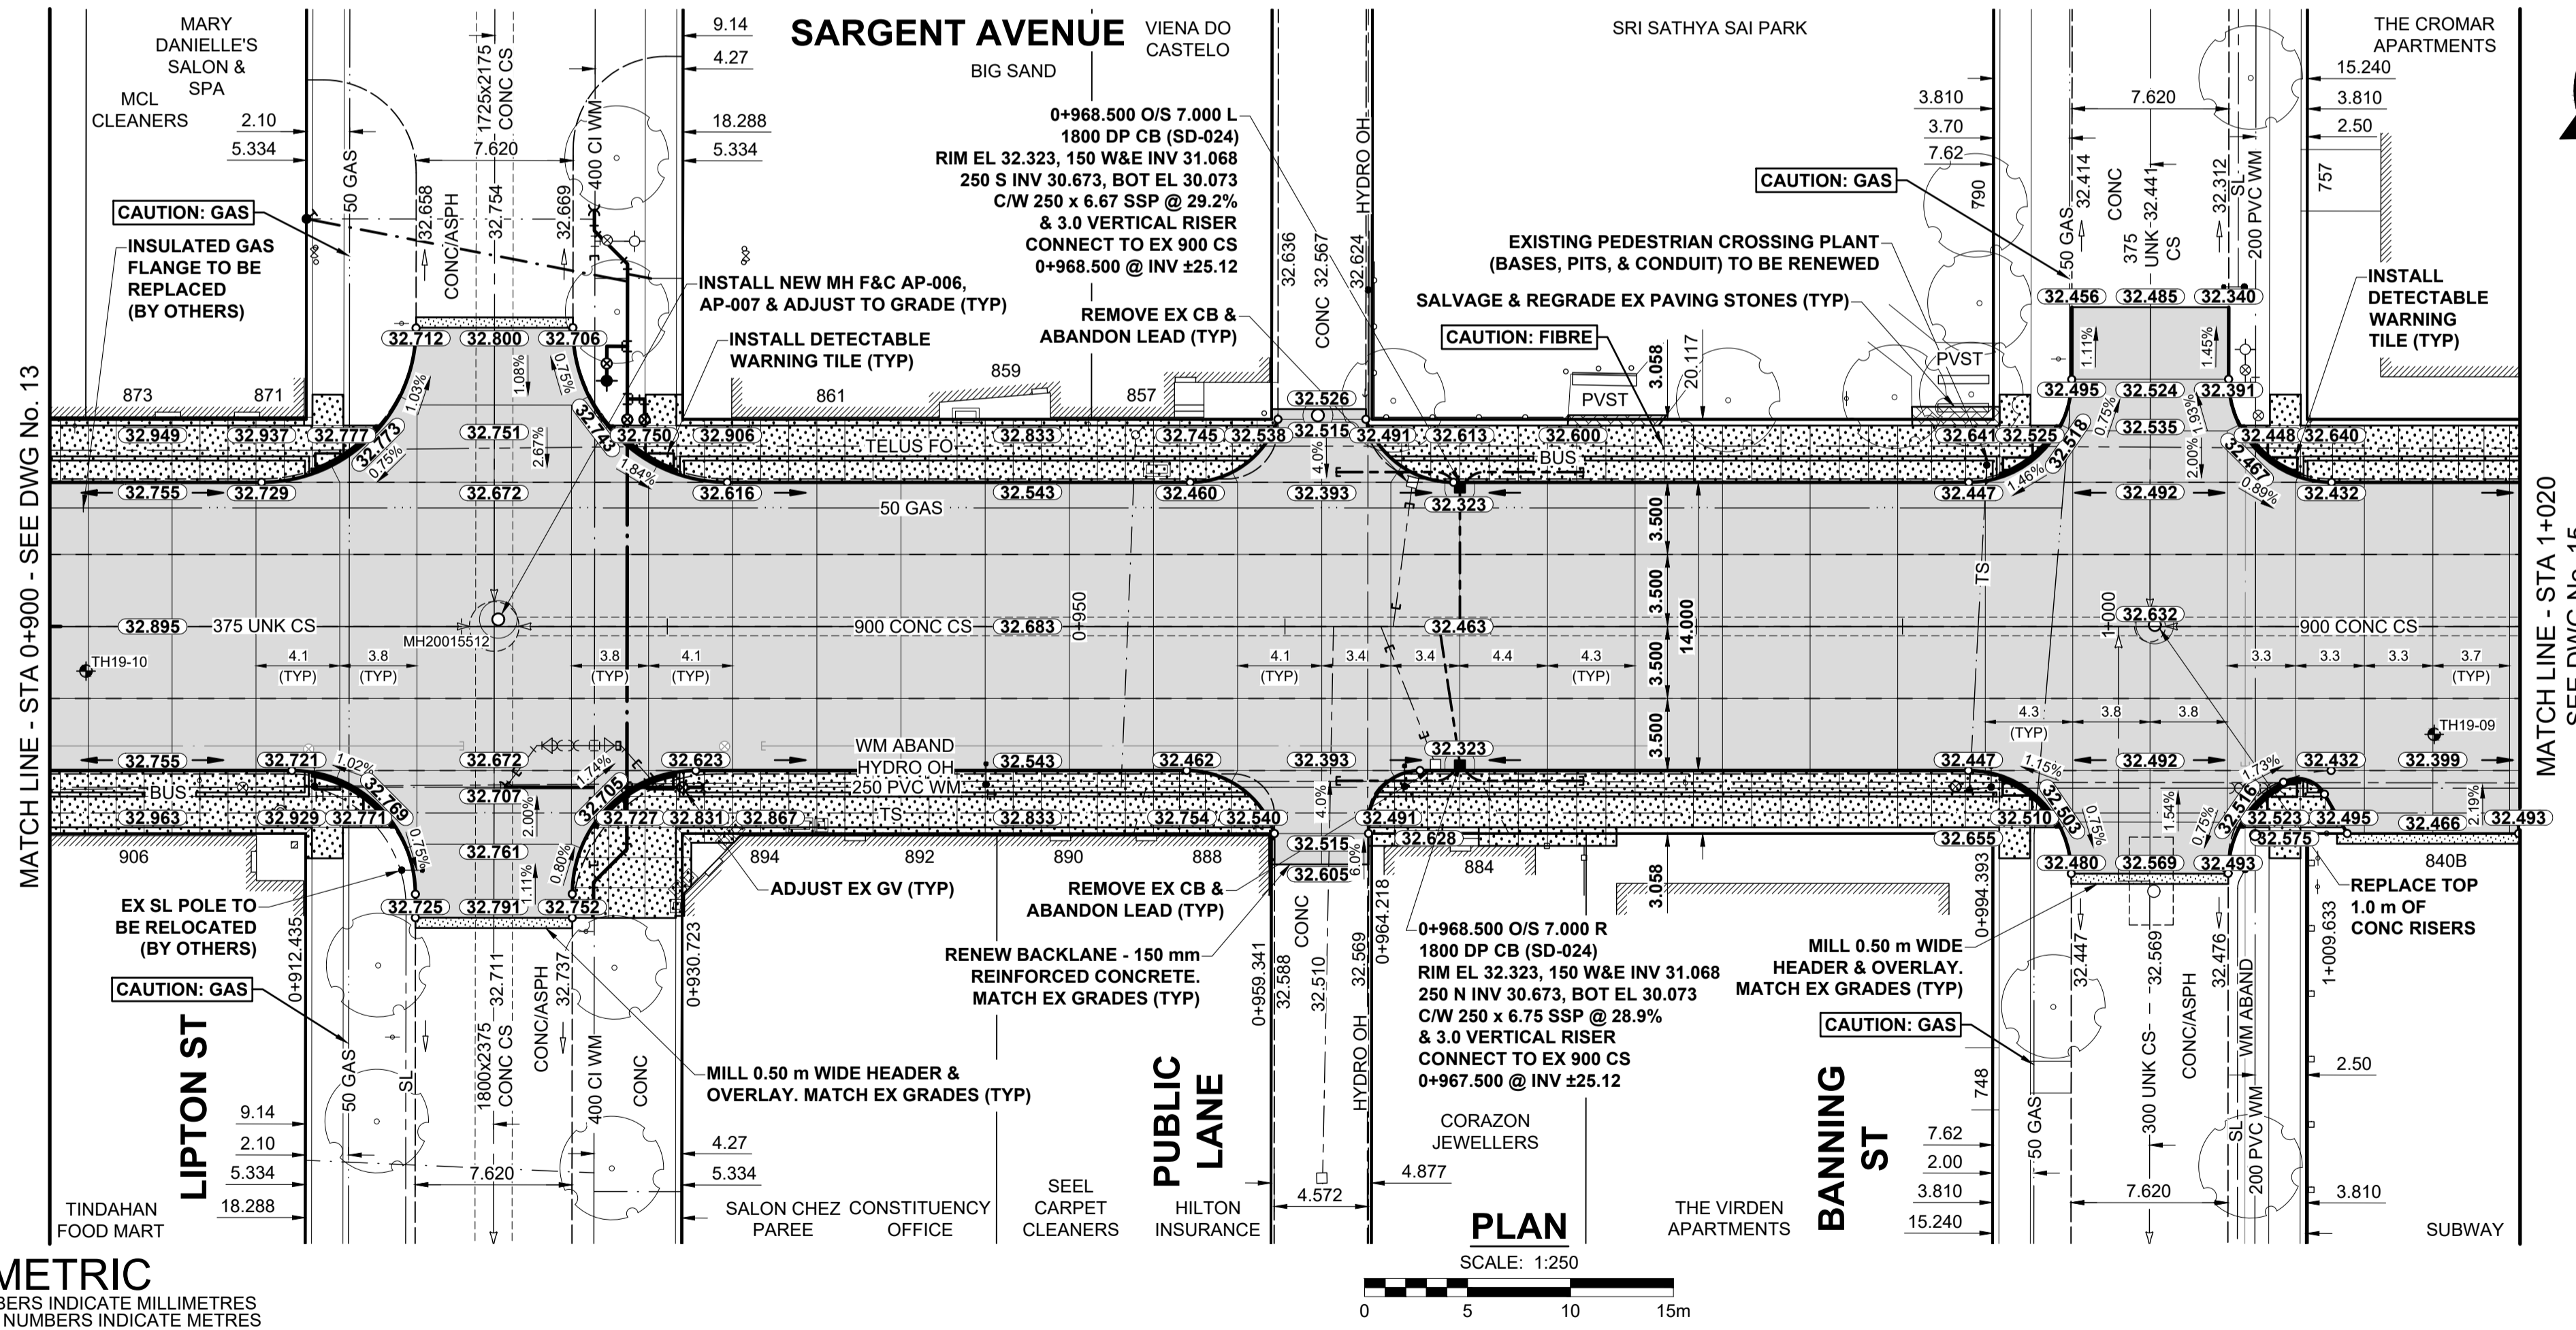

**METRIC**  
WHOLE NUMBERS INDICATE MILLIMETRES  
DECIMALIZED NUMBERS INDICATE METRES

---	GAS	○	MANHOLE	●	CONCRETE PAVEMENT	LOCATION APPROVED
---	MTS HANDWELL/PEDESTAL	□	CATCH BASIN/CATCH PIT	■	CONC SIDEWALK/MEDIAN	UNDERGROUND STRUCTURES
---	HYDRO HANDWELL/CABINET	△	CURB INLET WITH BOX	▲	ASPHALT PAVEMENT	
---	CATV/FIBRE OPTIC	○	TREE	●	PAVING STONE	SUPR. U/G STRUCTURES
---	TRAFFIC SIGNALS/PIT	○	TEST HOLE	●	GRAVEL	COMMITTEE DATE
---	LAND DRAINAGE SEWER	○	PROPERTY LINE	---	RAMP CURB	<b>NOTE:</b>
---	SANITARY/COMBINED SEWER	○	SURVEY BAR	---	PLANING/REMOVAL	LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.
---	CB LEAD/SSP/DPC	○	FENCE	---		
---	WATERMAIN	○	BOC/EDGE OF PAVEMENT	---		
---	SUBDRAIN	○	ELEVATION	(33.333)		
---	DITCH	---	TRAFFIC SIGN	(33.333)		
---	EXISTING	---	LEGEND - PLAN	---		
---	NEW	---	LEGEND - PLAN	---		

B	ISSUED FOR TENDER	20/02/27	RPB
A	ISSUED FOR REVIEW	20/02/03	RPB
No.	REVISIONS	Y/M/MDD	BY

BM 37-59  
ELEV 233.277 m  
NE Cor. Erin St. & Richard Ave., Tbl. in W. Conc. Foundation No. 1525 Erin St., 1 m N. & 0.7 m below back of S.W. Cor. of Bldg.

PROFESSIONAL'S SEAL

**PRELIMINARY DRAWING**

NOT TO BE USED FOR CONSTRUCTION

CONSULTANT FILE NAME  
1903792-Sargent-PP-08.dwg

**THE CITY OF WINNIPEG**  
PUBLIC WORKS DEPARTMENT  
ENGINEERING DIVISION

**2020 PAVEMENT RENEWALS PROJECT**  
**SARGENT AVENUE RECONSTRUCTION**  
**ERIN STREET TO ARLINGTON STREET**

**SARGENT AVENUE**  
**PAVING AND GRADING**  
STA 0+900 TO STA 1+020

CITY DRAWING NUMBER  
P-3519-14

SHEET  
14 OF 26

DRAWING NUMBER  
14

TENDER No. 10-2020