


NOTE: CHAINAGES SHOWN ARE ALONG CENTRE LINE OF ROW

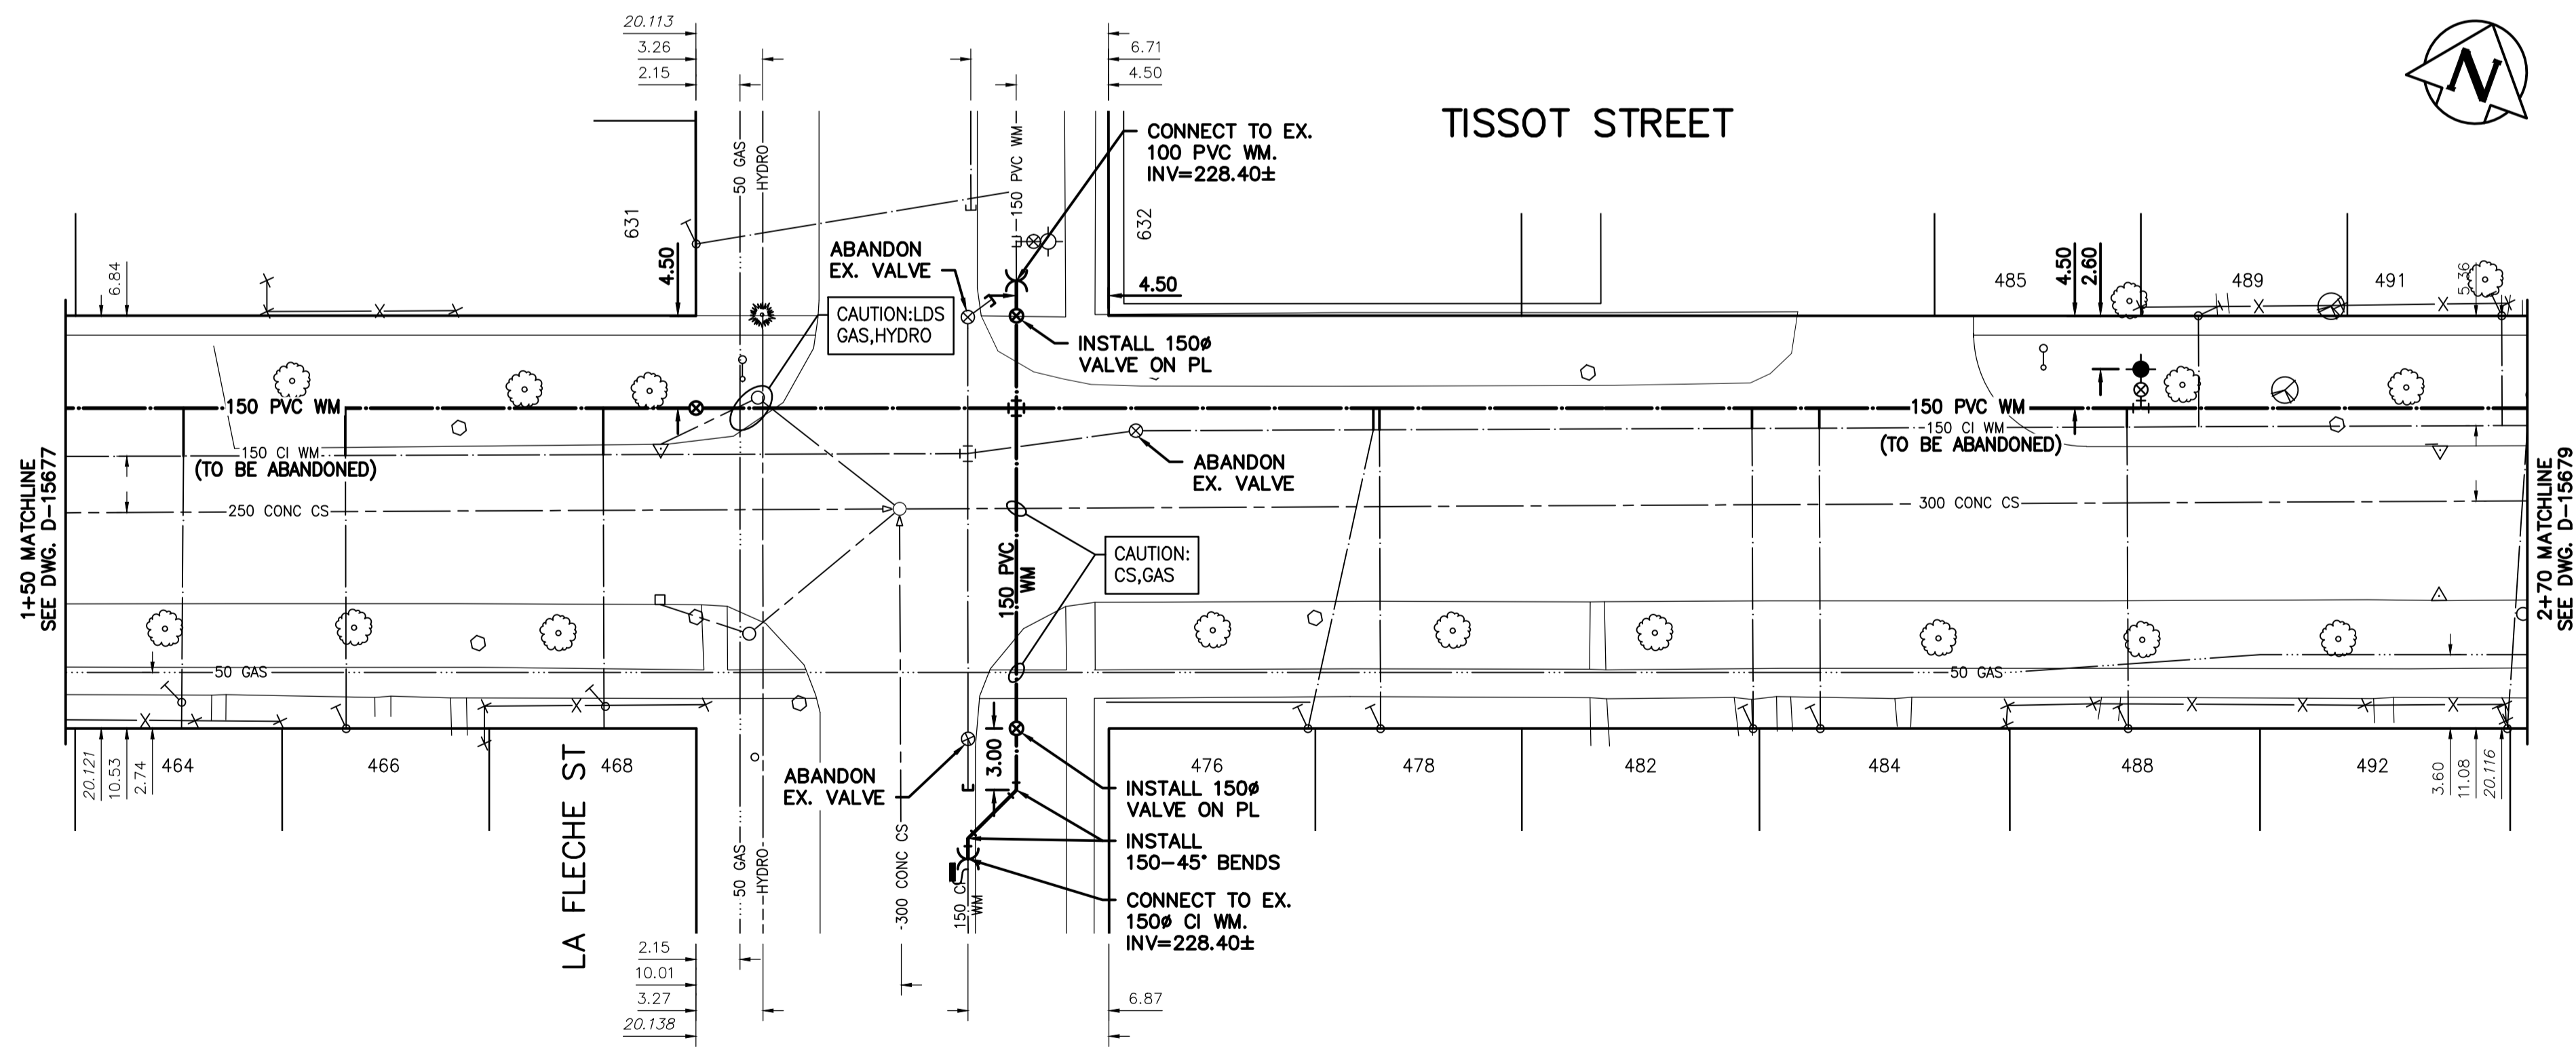


WATER SERVICE INFORMATION

ADDRESS	PIPE SIZE & MATERIAL (STREET)	PIPE SIZE & MATERIAL (PROP.)	SHORT & LONG MEASUREMENT	CORP. LOCATION	REMARKS
464 TISSOT ST	-	-	4.90 W ELL	-	RECONNECT SERVICE
RESIDENTIAL	-	-	24.90 W WL LA FLECHE	-	RECONNECT SERVICE
466 TISSOT ST	-	20	2.90 L/RHL	-	RECONNECT SERVICE
RESIDENTIAL	-	CU	-	-	RECONNECT SERVICE
468 TISSOT ST	-	-	5.50 E WLL	-	RECONNECT SERVICE
RESIDENTIAL	-	-	4.40 W WL LA FLECHE	-	RECONNECT SERVICE
476 TISSOT ST	-	20	0.09 L/LHL	-	RECONNECT SERVICE
RESIDENTIAL	-	CU	-	-	RECONNECT SERVICE
478 TISSOT ST	-	-	-	-	RECONNECT SERVICE
RESIDENTIAL	-	-	-	-	RECONNECT SERVICE
482 TISSOT ST	-	20	1.00 R/LHL	-	RECONNECT SERVICE
RESIDENTIAL	-	CU	-	-	RECONNECT SERVICE
484 TISSOT ST	-	20	0.30 L/RHL	-	RECONNECT SERVICE
RESIDENTIAL	-	CU	-	-	RECONNECT SERVICE
485 T	-	-	-	-	RECONNECT SERVICE
RESIDENTIAL	-	-	-	-	RECONNECT SERVICE
488 TISSOT ST	-	20	3.05 L/RHL	-	RECONNECT SERVICE
RESIDENTIAL	-	CU	-	-	RECONNECT SERVICE
489 TISSOT ST	-	20	1.00 E W BL	-	RECONNECT SERVICE
RESIDENTIAL	-	CU	2.80 E W LL	-	RECONNECT SERVICE
491 T	-	-	-	-	RECONNECT SERVICE
RESIDENTIAL	-	-	-	-	RECONNECT SERVICE
492 TISSOT ST	20	20	0.91 E/EHL	-	RECONNECT SERVICE
RESIDENTIAL	CU	LEAD	-	-	RECONNECT SERVICE
631 LAFLECHE ST	20	20	0.07 OUT	2.13 N OF S/C	OUTSIDE LIMITS
RESIDENTIAL	CU	CU	5.18 S OF N H/L	-	OUTSIDE LIMITS
632 LAFLECHE ST	20	20	35.50 R/LHL	14.30 N/HYD	OUTSIDE LIMITS
COMMERCIAL	CU	LEAD	14.69 N/HYD NE COR TISSOT & LAFLECHE	-	OUTSIDE LIMITS

\* SERVICES TO BE RENEWED TO R

NOTE: VALVES TO BE INSTALLED CLOCKWISE TO CLOSE

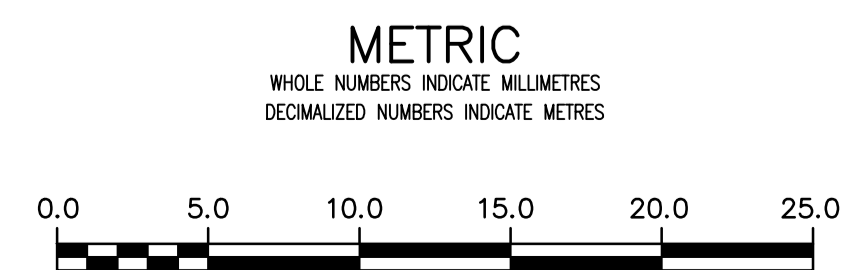

LOCATION APPROVED UNDERGROUND STRUCTURES		B.M. 654361 ELEV. 230.628	
SUPV. U/G STRUCTURES COMMITTEE	DATE	Provencher Ave. & Archibald, Tbt. in 7.6m Conc. pile in median strip, Valve Box 4.2m E. of W.L. Archibald & 21.6 S. of N.L. of Provencher Ave. Monument 0.2m B.G.L.	
NOTE:			
LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.			
02	ISSUED FOR TENDER	2020.04.01	RS
01	ISSUED FOR 60% REVIEW	2020.03.09	RS
NO.	REVISIONS	DATE	BY



DESIGNED BY	RS	CHECKED BY	RS
DRAWN BY	SC	APPROVED BY	RS
SCALE:		RELEASED FOR CONSTRUCTION	
HORIZONTAL	1:250		
VERTICAL	1:50		
DATE	2019.01.15	DATE	

ENGINEER'S SEAL  
ORIGINAL SEALED BY  
R.M. SHERLOCK  
P. ENG.  
2020/04/01  
CONSULTANT DRAWING NUMBER  
C-219

**THE CITY OF WINNIPEG**  
WATER AND WASTE DEPARTMENT  
ENGINEERING DIVISION

2020 WATERMAIN RENEWALS  
CONTRACT 4  
TISSOT STREET  
STA. 1+50 TO  
STA. 2+70

SHEET 21 OF 22  
CITY DRAWING NUMBER  
D-15678