

- CONSTRUCTION NOTES**
1. REMOVE EXISTING PAVEMENT AND CONSTRUCT NEW 150mm REINFORCED CONCRETE PAVEMENT
  2. CONSTRUCT NEW ASPHALT OVERLAY
  3. REMOVE EXISTING ASPHALT OVERLAY
  4. REGRADE EXISTING PATIO BLOCKS
  5. INSTALL NEW MOUNTABLE CURB AND GUTTER PAVING COVER (AP-017)
  6. REGRADE EXISTING PAVING STONES
  7. ADJUST MANHOLE AND NEW FRAME AND COVER (AP-006, AP-007)
  8. INSTALL NEW CURB AND GUTTER INLET FRAME AND COVER (AP-011, AP-012)
  9. MILL JOINT TO DEPTH SPECIFIED BY CONTRACT ADMINISTRATOR AND PATCH WITH ASPHALT AS PER SPECIFICATION E11
  10. INSTALL NEW MOUNTABLE CURB AND GUTTER FRAME AND COVER (AP-015, AP-016)
  11. REMOVE EXISTING CATCH PIT AND INSTALL NEW 1800mm CATCH BASIN (SD-024) CONNECT TO EXISTING LAND DRAINAGE SEWER AS PER CW 2130. ABANDON EXISTING CATCH PIT DRAINAGE PIPE

- GENERAL NOTES**
- A. PAVEMENT DIMENSIONS ARE TO BACK OF CURB
  - B. ALL CURB RADII UNDER 15.0m SHALL BE MODIFIED BARRIER (SD-203B)
  - C. ADD 200.000m TO ALL DESIGN ELEVATION TO OBTAIN GEODETIC ELEVATIONS
  - D. CURB REPLACEMENT AS DIRECTED BY CONTRACT ADMINISTRATOR
  - E. ASPHALT TIE-INS ON APPROACHES TO BE DETERMINED IN THE FIELD BY CONTRACT ADMINISTRATOR
  - F. PAVEMENT REPAIRS SHOWN ARE ONLY A REPRESENTATIVE SAMPLE OF TENDER QUANTITIES

**METRIC**  
WHOLE NUMBERS INDICATE MILLIMETERS  
DECIMALIZED NUMBERS INDICATE METERS  
BID OPPORTUNITY NO. 4-2020

EXISTING	LEGEND - PLAN	PROPOSED	EXISTING	LEGEND - PLAN	PROPOSED	EXISTING	LEGEND - PROFILE	PROPOSED
	HYDRANT			LDS/WWS			CONCRETE	
	VALVE			WATERMAIN			CONCRETE SIDEWALK	
	CURB STOP			GAS			ASPHALT	
	MANHOLE			TRAFFIC SIGNALS			BRICK	
	CATCH BASIN			HYDRO/STREET LIGHT			PARTIAL DEPTH	
	CURB INLET			MTS/SHAW			LEGEND - PLAN	
	HYDRO POLE			CURB RENEWAL			EXISTING	
	LIGHT STANDARD			PROPERTY LINE			WEST GUTTER	
	TRAFFIC SIGNAL POLE			RAMP CURB			CENTER LINE	
	SURVEY BAR			ELEVATIONS			EAST GUTTER	
	GEODETIC BENCH MARK			TREES			WEST SIDEWALK	
	TREE			EAST SIDEWALK			EAST SIDEWALK	

**LOCATION APPROVED UNDERGROUND STRUCTURES**

DATE: \_\_\_\_\_

COMMITTEE: \_\_\_\_\_

**NOTE:**  
LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE. BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.


B.M. ELEV.	IB @ NW CORNER OF 282 GARTON AVE	DATE	BY
232.534			

**ENGINEERING DIVISION**  
TECHNOLOGY SERVICES BRANCH  
106 - 1155 PACIFIC AVE

DESIGNED BY	J.W.	CHECKED BY	C.H.
DRAWN BY	J.W.	APPROVED BY	

HOR. SCALE: 1 : 250  
VERTICAL: 1 : 10

DATE: 2020/02/18

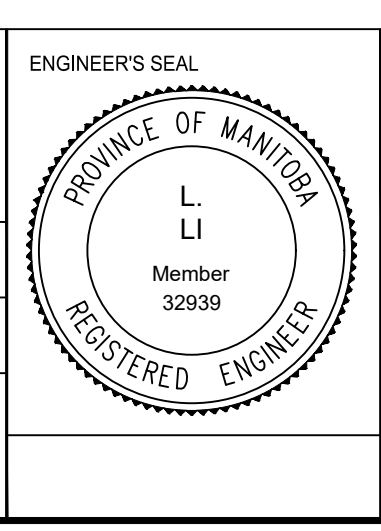

**THE CITY OF WINNIPEG**  
PUBLIC WORKS DEPARTMENT

**FOREST COVE DR**  
FROM GARTON AVE TO JONATHAN CRES  
ASPHALT OVERLAY AND ASSOCIATED WORKS  
FROM STA. 6+00 TO STA. 6+74

CITY DRAWING NUMBER SE-20-23  
SHEET 23 OF 39  
6