

- CONSTRUCTION NOTES**
1. REMOVE EXISTING PAVEMENT AND CONSTRUCT NEW 150mm REINFORCED CONCRETE PAVEMENT
 2. REMOVE AND REPLACE 100mm CONCRETE SIDEWALK (SD-228A)
 3. REMOVE EXISTING CURB AND CONSTRUCT NEW BARRIER CURB (SD-200)
 4. REMOVE EXISTING CATCH BASIN AS PER CW 2130
 5. REMOVE EXISTING CURB INLET AND INSTALL NEW CATCH BASIN (SD-024) AND CONNECT TO EXISTING CB LEAD AS PER CW 2130
 6. INSTALL NEW FRAME AND SOLID COVER (AP-006, AP-007)
 7. MILL EXISTING ASPHALT, CONSTRUCT NEW ASPHALT PAVEMENT 80mm(TYP)
 8. REGRADE EXISTING PAVING BRICKS
 9. INSTALL NEW FRAME AND GRATED COVER (AP-006, AP-008)
 10. REMOVE EXISTING CONCRETE SIDEWALK AND REPLACE WITH SOD AND MODIFIED BARRIER CURB

- GENERAL NOTES**
- A. PAVEMENT DIMENSIONS ARE TO BACK OF CURB
 - B. ALL CURB RADII UNDER 15.0m SHALL BE MODIFIED
 - C. CURB REPLACEMENT AS DIRECTED BY CONTRACT ADMINISTRATOR
 - D. ASPHALT TIE-INS ON APPROACHES TO BE DETERMINED IN THE FIELD BY THE CONTRACT ADMINISTRATOR
 - E. PAVEMENT REPAIRS SHOWN ARE ONLY A REPRESENTATIVE SAMPLE OF THE TENDER QUANTITIES

METRIC
WHOLE NUMBERS INDICATE MILLIMETERS
DECIMALIZED NUMBERS INDICATE METERS

BID OPPORTUNITY NO. 4-2020


EXISTING	LEGEND - PLAN	PROPOSED	EXISTING	LEGEND - PLAN	PROPOSED	EXISTING	LEGEND - PROFILE	PROPOSED
⊕	HYDRANT	◆	---	LDS/WWS	---	---	CONCRETE	---
⊗	VALVE	◆	---	WATERMAIN	---	---	CONCRETE SIDEWALK	---
⊙	CURB STOP	●	---	GAS	---	---	ASPHALT	---
○	MANHOLE	●	---	TRAFFIC SIGNALS	---	---	BRICK	---
□	CATCH BASIN	●	---	HYDRO/STREET LIGHT	---	---	LEGEND - PLAN	PROPOSED
△	CURB INLET	▲	---	MTS/SHAW	---	---	LEGEND - PROFILE	PROPOSED
○	HYDRO POLE	●	---	CURB RENEWAL	---	---	WEST GUTTER	---
○	LIGHT STANDARD	●	---	PROPERTY LINE	---	---	CENTER LINE	---
○	TRAFFIC SIGNAL POLE	●	---	RAMP CURB	---	---	EAST GUTTER	---
⊕	SURVEY BAR	◆	---	ELEVATIONS	---	---	WEST SIDEWALK	---
⊕	GEODETIC BENCH MARK	◆	---	TREE	---	---	EAST SIDEWALK	---

LOCATION APPROVED
UNDERGROUND STRUCTURES

DATE: _____

NOTE:
LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE. BUT NO GUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL SERVICES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION.

B.M. ELEV.	I.B. @ N.W CORNER 66 BUTTERCUP AVE
	231.715
DESIGNED BY	J.W.
CHECKED BY	E.H.
DRAWN BY	J.W.
APPROVED BY	
HOR. SCALE:	1 : 250
VERTICAL:	1 : 10
DATE	2020/02/19

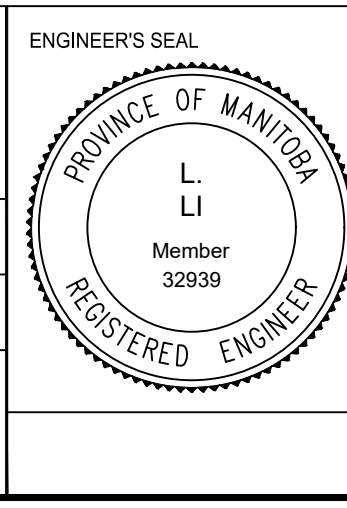

THE CITY OF WINNIPEG
PUBLIC WORKS DEPARTMENT

MORRISON STREET
FROM ARROWWOOD DR. N. TO BUTTERCUP AVE
ASPHALT OVERLAY AND ASSOCIATED WORKS
FROM STA. 1+00 TO STA. 2+00

CITY DRAWING NUMBER
SE-20-32
SHEET 32 OF 39

1