





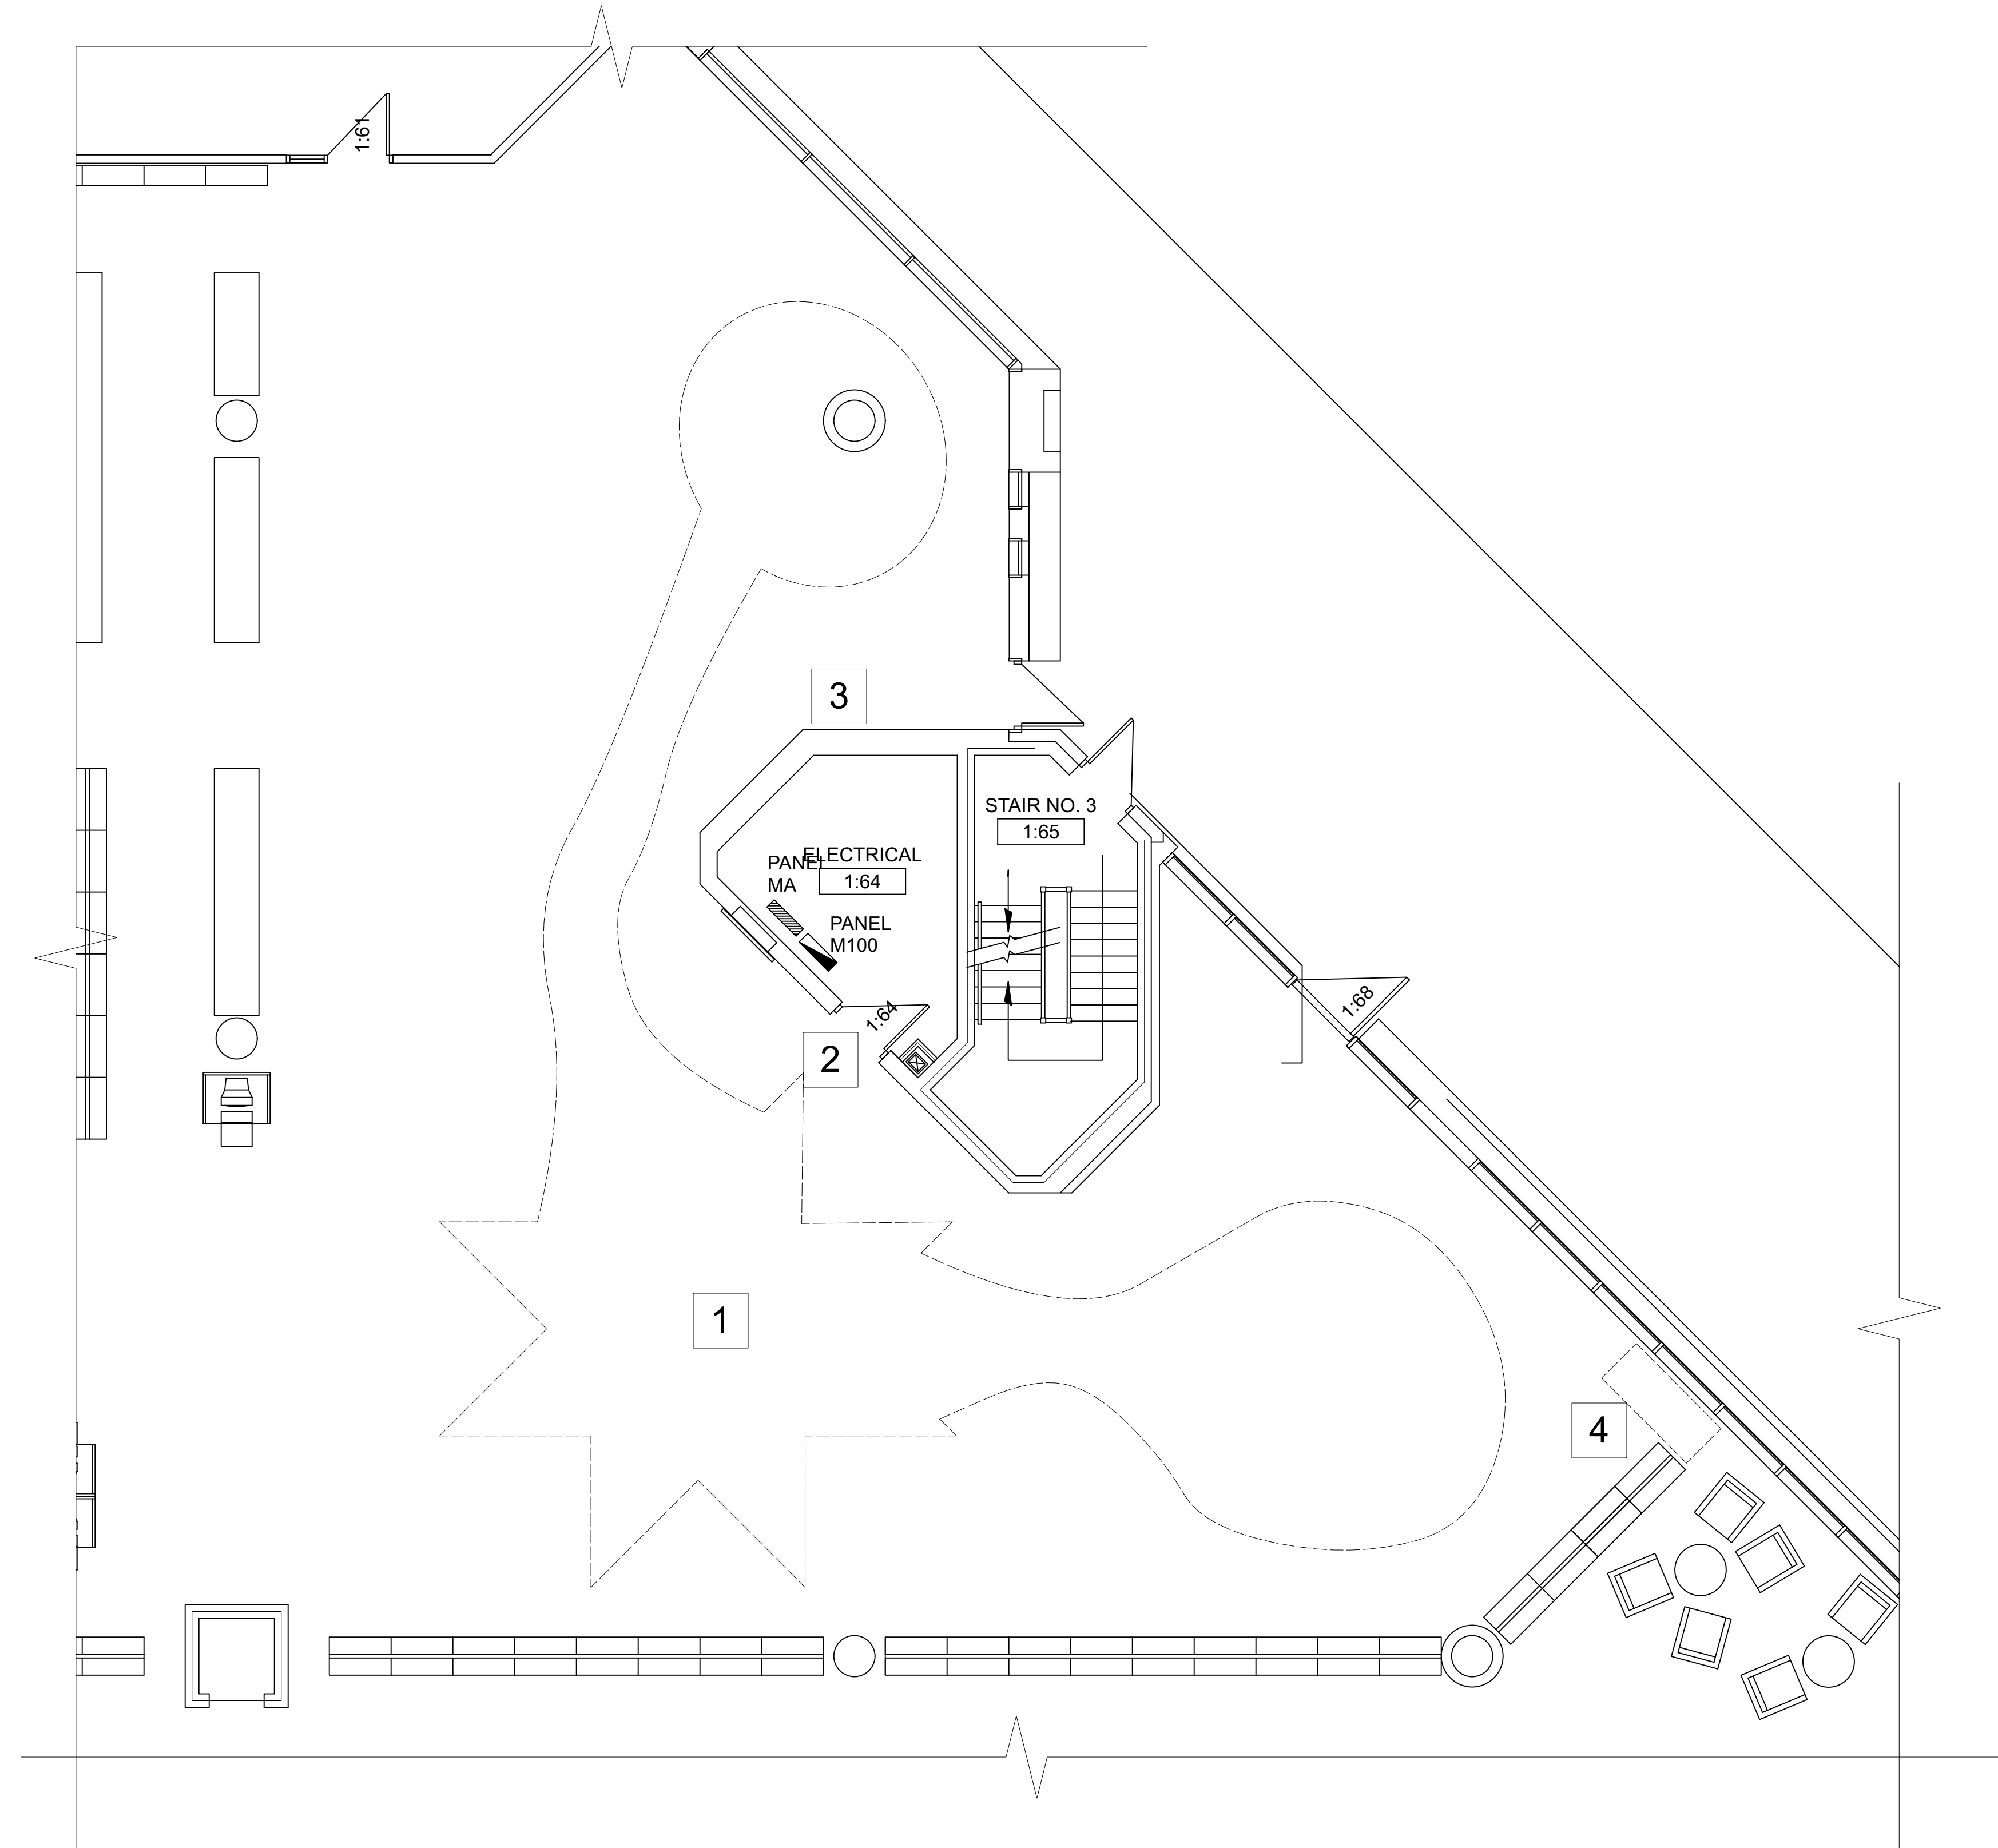
KEY PLAN

**DEMOLITION DRAWING LEGEND**

- EXISTING DOORS 
- EXISTING FLOORING TO BE REMOVED 
- EXISTING MILLWORK TO BE REMOVED 
- DEMOLITION DRAWING NOTE 

**DEMOLITION NOTES**

- 1** REMOVE EXISTING FLOORING. SEE DRAWING A2 FOR NEW FLOORING TYPES AND MEASUREMENTS.
- 2** REMOVE CLIPBOARD FROM EXISTING ELECTRICAL ROOM DOOR AND PRIME FOR NEW PAINT.
- 3** PREP EXTERIOR CONCRETE WALLS OF THE ELECTRICAL ROOM AND STAIR NO 3 FOR FURRING STRIPS AND MAPLE VENEER PANELS.
- 4** REMOVE EXISTING MILLWORK BOX BETWEEN WINDOW AND BOOKCASE.



**1 DEMOLITION PLAN**  
Scale: 3/16" = 1'0"

**GENERAL NOTES**

1. ALL DIMENSIONS TO BE VERIFIED ON SITE PRIOR TO CONSTRUCTION. ANY DISCREPANCIES PLEASE NOTIFY CONTRACT ADMINISTRATOR.
2. GENERAL CONTRACTOR TO COMPLY WITH ALL LOCAL, PROVINCIAL, AND FEDERAL CODES.
3. ALL NEW MATERIALS TO BE INSTALLED IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS AND SPECIFICATIONS.
4. CONFIRM ALL EQUIPMENT ELECTRICAL REQUIREMENTS WITH CONTRACT ADMINISTRATOR.

0 ISSUED FOR TENDER 11/23/2021 DS



PROJECT TITLE  
**Refurbishment of the Children's Area - Millennium Library**  
Tender No.: 836 - 2021  
CLIENT  
**Winnipeg Planning, Property and Development**  
4th floor - 185 King Street  
Winnipeg, Manitoba  
R3B 1J1

LOCATION  
**251 Donald Street**  
Winnipeg, Manitoba  
R3C 3P5

DRAWING TITLE  
**DEMOLITION PLAN**

DATE  
**2021-11-23**

DRAWN BY  
**WOVEN COLLABORATIVE**