
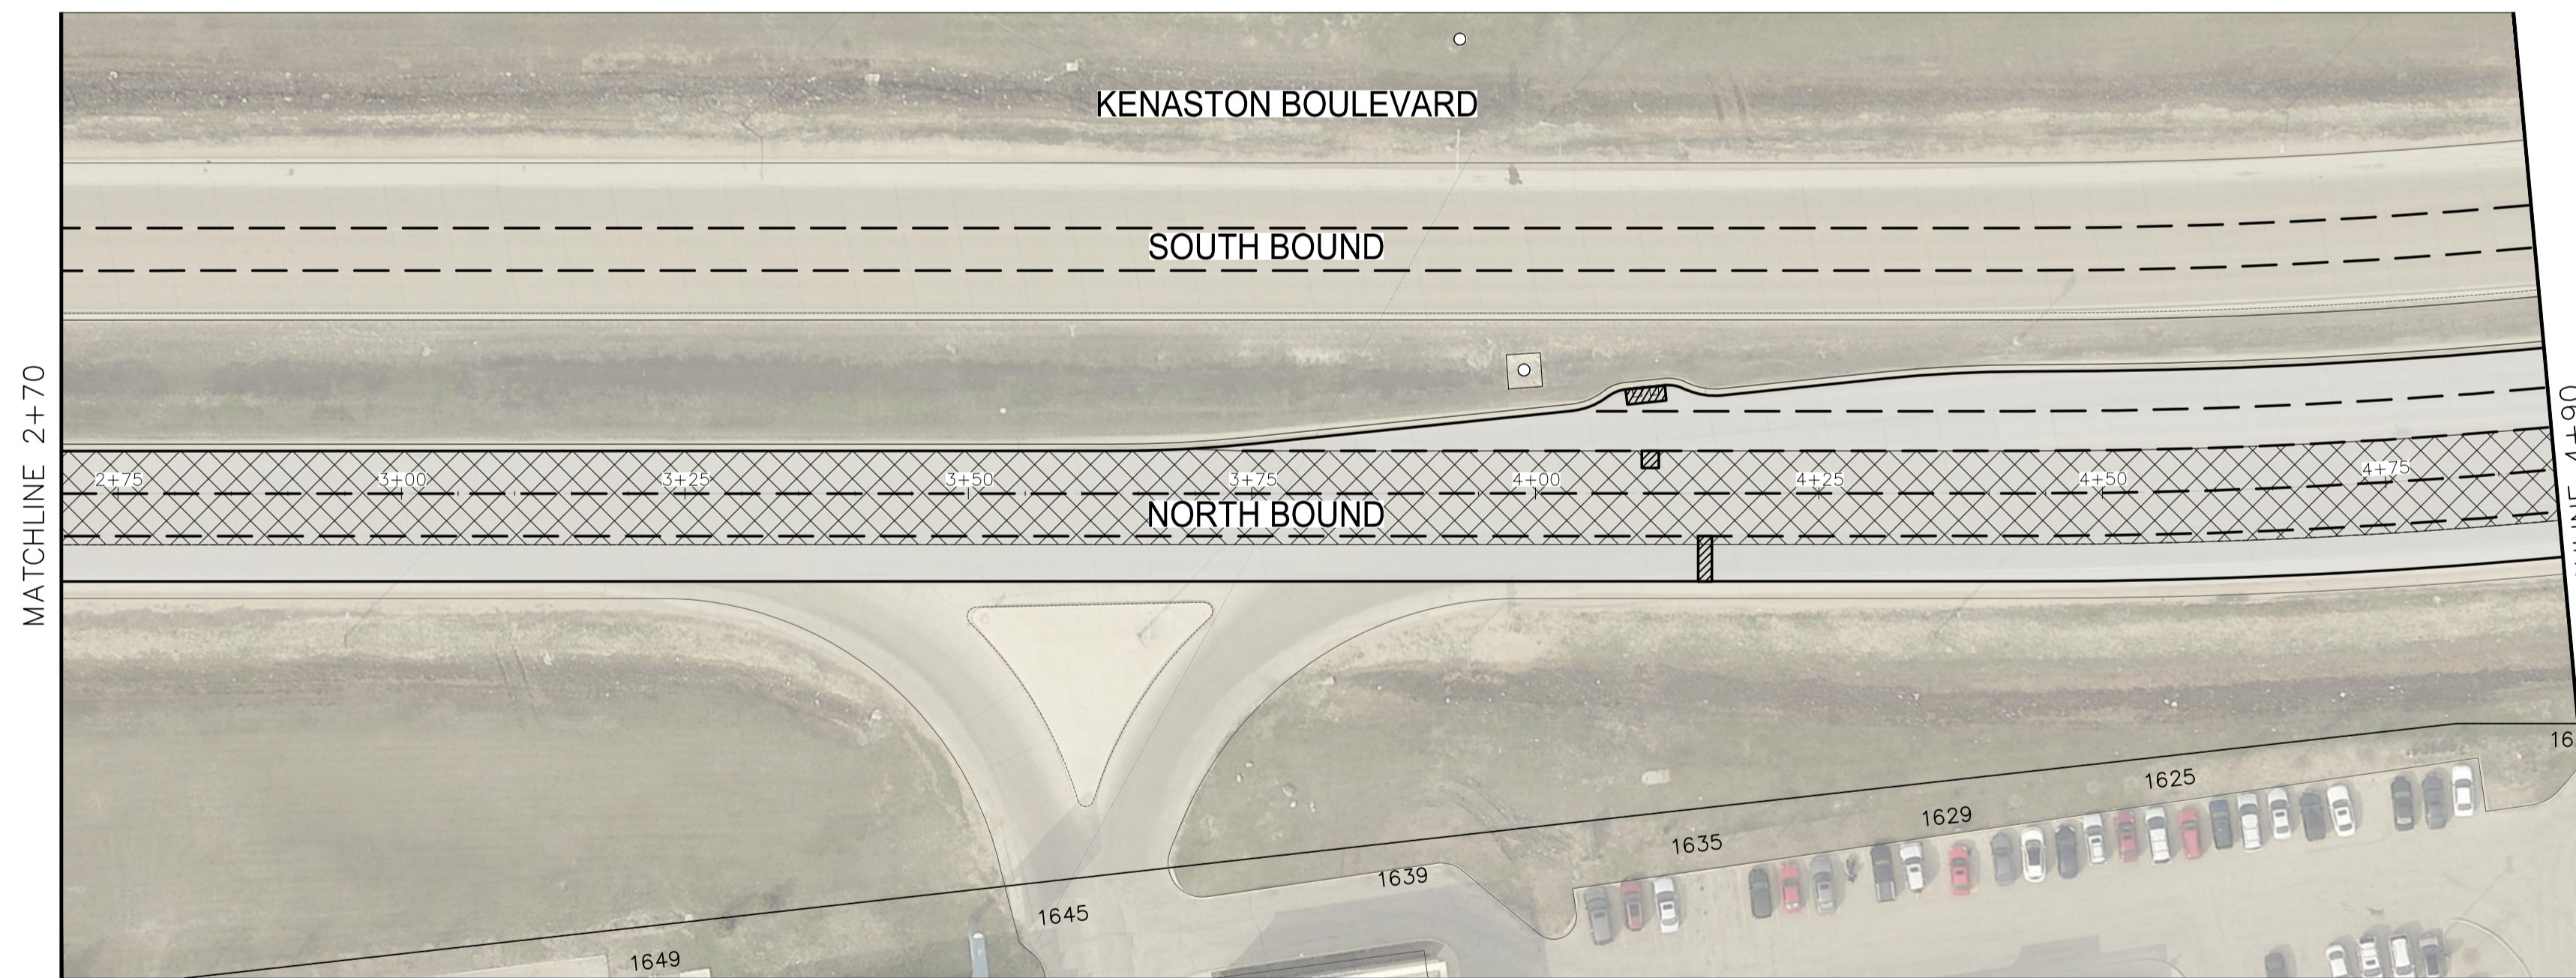


Apr 21, 2022 - 3:49pm F:\2022\221-02142-00 - 2022 Street Maintenance Program\4.0 Tech + Prof Services\4.11 Highways\_Bridges\4.11.06 Drawings\03 Working Dwg\NB\_Kenaston Blvd.dwg -tab:199-2022\_NB\_Kenaston Blvd\_221-02142-00-03-RB

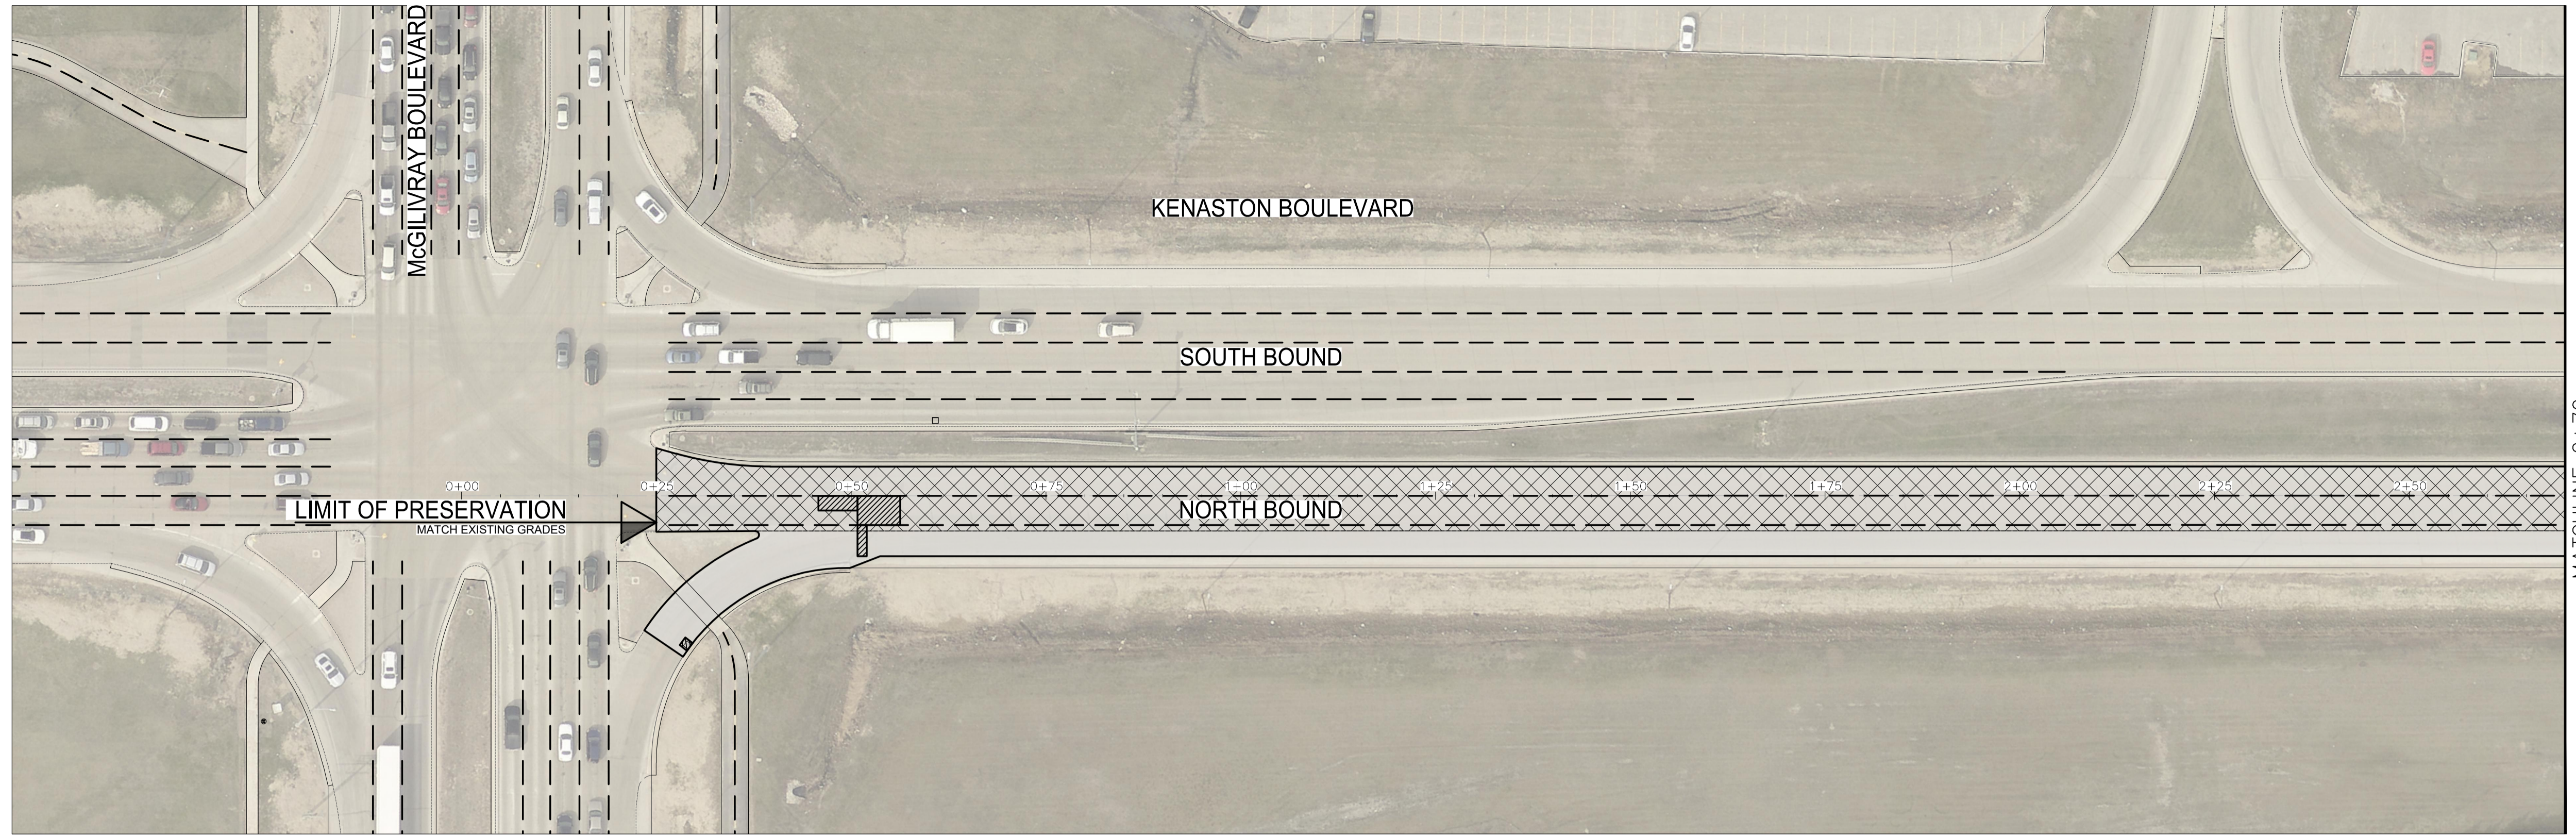

- NOTES:**
1. ALL WORK AND MATERIALS TO BE IN ACCORDANCE WITH THE LATEST REVISION OF THE CITY OF WINNIPEG STANDARD CONSTRUCTION SPECIFICATIONS.
  2. CONTRACTOR TO CONFIRM THE LOCATION OF ALL UTILITIES/SERVICES IN THE FIELD PRIOR TO CONSTRUCTION.
  3. RENEW CURB, SPLASH STRIP, BULLNOSE, AND SIDEWALK AS IDENTIFIED BY CONTRACT ADMINISTRATOR.
  4. ALL PRIVATE WALKWAYS TO BE ADJUSTED TO NEW SIDEWALK OR TOP OF CURB ELEVATION, AS REQUIRED.
  5. ADJUST MH FRAMES, CB RIMS, CURB INLETS, AND VALVES TO NEW GRADES, AS REQUIRED.
  6. MODIFIED BARRIER CURB TO BE CONSTRUCTED AT ALL INTERSECTION RADI AND BACK LANE RADI.
  7. LAMP STANDARDS, HYDRO POLES, AND ANCHORS THAT REQUIRE TEMPORARY SUPPORT, REMOVAL OR REPLACEMENT, TO BE DONE SO AT THE EXPENSE OF THE CONTRACTOR AS NECESSARY.
  8. CONTRACTORS TO TAKE PRECAUTIONARY STEPS TO PROTECT EXISTING TREES WITHIN THE LIMITS OF CONSTRUCTION FROM DAMAGE FROM CONSTRUCTION ACTIVITIES AS OUTLINED IN THE SPECIFICATIONS.
  9. ALL BOULEVARDS TO BE SODDED UNLESS OTHERWISE NOTED.
  10. FULL AND PARTIAL DEPTH JOINT REPAIRS, AND SLAB RENEWALS TO BE FINALIZED IN THE FIELD PRIOR TO CONSTRUCTION. THE REPAIRS IDENTIFIED ON THIS DRAWING ARE FOR TENDER PURPOSE ONLY.
  11. ALL JOINTS AND CRACKS TO BE SEALED AFTER DIAMOND GRINDING IS COMPLETED.
  12. DIAMOND GRINDING LIMITS TO BE FINALIZED IN THE FIELD PRIOR TO CONSTRUCTION, AS DIRECTED BY CONTRACT ADMINISTRATOR.

EXISTING	LEGEND-PLAN	PROPOSED	EXISTING	LEGEND-PLAN	PROPOSED
	TRANSIT STOP			EDGE OF SIDEWALK	
	HYDRO POLE			FENCE	
	MANHOLE			PROPERTY LINE	
	CATCH BASIN			EDGE OF CONCRETE & ASPHALT	
	CURB INLET			SIDEWALK RENEWAL	
	HYDRANT			DIAMOND GRINDING LIMITS	
	VALVE			FULL DEPTH REPAIRS	
	CURB STOP			ASPHALT RENEWAL	
	ANCHOR			CONCRETE PRESERVATION	
	CIVIC ADDRESS			BOULEVARD GRADING	

NO.	REVISIONS	DATE	BY

DESIGNED BY	CHECKED BY
JM	SS
DRAWN BY	APPROVED BY
SB	VM

ISSUED FOR TENDER	DATE	BY
A	04/20/22	JM
ISSUED FOR DETAIL DESIGN REVIEW	DATE	BY
A	04/19/22	JM

NO.	REVISIONS	DATE	BY

**wsp**

WSP Canada Inc.  
1600 Buffalo Place  
Winnipeg, MB R3T 6B8  
t. 204.477.6650  
f. 204.474.2864  
www.wsp.com

ENGINEER'S SEAL  
PROVINCE OF MANITOBA  
J.S.F. MAGNE  
MEMBER 31236  
REGISTERED PROFESSIONAL ENGINEER

CONSULTANT ACAD DWG. NO.  
221-02142-00-03

**THE CITY OF WINNIPEG**  
PUBLIC WORKS DEPARTMENT  
ENGINEERING SERVICES DIVISION

**2022 STREETS MAINTENANCE PRESERVATION PROGRAM**  
KENASTON BOULEVARD NORTH BOUND  
CONCRETE PRESERVATION AND DIAMOND GRINDING  
MCGILVIRAY BOULEVARD TO STA. 4+90

**PRELIMINARY**  
**NOT FOR CONSTRUCTION**

ENGINEERS  
GEOSCIENTISTS  
MANITOBA  
Certificate of Authorization  
WSP Canada Inc.  
No. 5750

CITY DRAWING NUMBER  
N/A

SHEET 03 OF 13

TENDER NO.  
199-2022