


## NOTES:

- 1. LAYOUT OF PLANT MATERIAL TO BE APPROVED BY CA PRIOR TO INSTALLATION.
- CONTRACTOR TO ENSURE 'T'-BARS DO NOT PENETRATE ROOT BALL
- SECURE 'T'-BARS TO TREE @ APPROX. 2/3 TOTAL TREE HEIGHT ABOVE FIN. GRADE.
- TREE SHALL BE PRUNED IMMEDIATELY AFTER PLANTING TO REMOVE DEAD, BROKEN, DISEASED, DYING OR RUBBING BRANCHES. CO-DOMINANT STEMS LESS THAN 100mm (4") DIA. AT THE FORKS SHALL BE PRUNED OFF AND ONE MAIN STEM SHOULD REMAIN. TREE TOPPING OR HEADING IS NOT PERMITTED AT ANY TIME.
- STAKES & TIES TO BE REMOVED BY CONTRACTOR AT END OF MAINTENANCE PERIOD AND UPON ACCEPTANCE BY L.A.
- MULCH TO BE PROVIDED BY BRRMF. ALSO REFER TO CITY OF WINNIPEG TREE PLANTING AND MAINTENANCE SPECIFICATION.



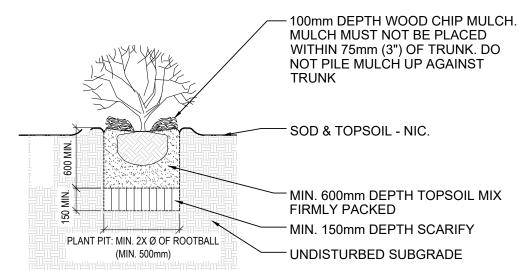

apoba an

ANDREW JOHNSON

CONSULTANT DRAWING NUMBER

Member No. 149 🙎

## TYPICAL SHRUB PLANTING

**SCALE - 1:25** 

B.M. ELE∨. LOCATION APPROVED SCATLIFF + MILLER + MURRAY UNDERGROUND STRUCTURES visionary urban design + landscapes SUPV. U/G STRUCTURES COMMITTEE DESIGNED CHECKED ΑJ ΙY DRAWN APPROVED LOCATION OF UNDERGROUND STRUCTURES AS SHOWN ARE BASED ON THE BEST INFORMATION AVAILABLE BUT NO QUARANTEE IS GIVEN THAT ALL EXISTING UTILITIES ARE SHOWN OR THAT THE GIVEN LOCATIONS ARE EXACT. CONFIRMATION OF EXISTENCE AND EXACT LOCATION OF ALL STRUCES MUST BE OBTAINED FROM THE INDIVIDUAL UTILITIES BEFORE PROCEEDING WITH CONSTRUCTION. AJ/DT CO RELEASED FOR CONSTRUCTION SCALE: HORIZONTAL 1:25 VERTICAL ISSUED FOR TENDER 2023/08/22 DATE REVISI⊓NS DATE 2023 08 22 DATE

SCALE - 1:25



## THE CITY OF WINNIPEG

WATER AND WASTE DEPARTMENT SOLID WASTE DIVISION

2023 BRRMF LANDSCAPING AND TREE PLANTING PROJECT

PLANTING DETAILS

SHEET 4 DF 5 CITY DRAWING NUMBER

L-0400A-B0003-001