Appendix G

APPENDIX G- WWD IDENTIFICATION STANDARD



The City of Winnipeg

Water & Waste Department

Identification Standard

Document Code: Revision: 04

Original Approved	C. Wiebe for G. Patton	Dec. 4, 2019	
By:	Geoff Patton, Manager of Engineering	Date	

Ĩ	Identification Standard	Revision:	04	Page	2 of 112
Winnipèg		Document Code	c		

This page is intentionally blank.



REVISI	ON REGISTER				
Rev.	Description	Date	Ву	Checked	Approved
00	Issued for City Use	2013-05-31	C. Reimer	C. Reimer	C. Reimer
01	Miscellaneous Revisions	2016-04-04	C. Reimer	P. Biesse	C. Wiebe
02	Miscellaneous Revisions	2017-03-24	C. Reimer	P. Biesse L. Harrington	-
03	Added Sections 2.5.5 and 2.5.6 Added Fluid Commodity Codes Miscellaneous Minor Corrections / Revs.	2018-05-08	C. Reimer	P. Biesse L. Harrington	C. Wiebe
04	Updated Area Codes Appendices moved to separate document titled <i>Identification Standard Appendices</i>	2019-12-03	J. Coey L.Harrington	E. Campbell C. Wiebe	C. Wiebe

This document is owned and maintained by the Wastewater Planning and Project Delivery Branch of the Engineering Services Division. For questions, comments or revisions please contact the Wastewater Planning and Project Delivery Branch Head.



TABLE OF CONTENTS

1	Intr	oduction	7
	1.1	Scope of the Standard	7
	1.2	Application	7
		1.2.1 Re-identification	8
	1.3	Document Revisions	8
2	Ger	neral	11
	2.1	General Identification Requirements	. 11
	2.2	Facility Code	.12
	2.3	Area Code	.12
	2.4	Functional Designations	. 13
	2.5	Equipment Number	. 14
		2.5.1 Uniqueness	. 14
		2.5.2 Number of Digits	
		2.5.3 Equipment Number Ranges	
		2.5.4 Sequential Logical Numbering.	
		2.5.5 Coordination with Equipment Descriptions2.5.6 Additional Requirements for Wastewater Treatment Facilities	
	2.6	Subcomponents	
	2.0	2.6.1 Subcomponent Identifier Format	
		2.6.2 Use of Subcomponent System	
		2.6.3 Subcomponent Examples	
3	Arc	hitectural	21
-	3.1	Room Identifier	
	••••	3.1.1 Building Level Designation	
		3.1.2 Drawing Representation	
		3.1.3 Room Numbering Guidelines	. 23
	3.2	Door Identification	25
4	Med	chanical / Process Equipment	
	4.1	Identifier Format	. 27
		4.1.1 Component Numbers	. 27
	4.2	Functional Designations	. 28
	4.3	HVAC Grilles	. 31
	4.4	Subcomponents	. 32
5	Pip	ing and Duct	33
	5.1	Pipe and Duct Designation	. 33
		5.1.1 Nominal Pipe Sizes	. 34
		5.1.2 Fluid Commodity Codes	
		5.1.3 Piping Material	
		5.1.4 Insulation Material / Type	
	5.2	Piping and Duct Components	
		5.2.1 Manual Valve Identifier Format – Minor Valves	
		 5.2.2 Manual Valve Identifier Format – Major Valves and Valves with Instrumentation. 5.2.3 Manual Valve Identifier Format – Instrumentation Isolation and Bypass Valves 	
		5.2.4 Miscellaneous Piping Equipment Identifier Format	
		5.2.5 Miscellaneous Ducting Equipment Identifier Format	

5 of 112

		5.2.6	Cathodic Protection Components	
6	Ela	5.2.7	Sample P&ID	
0				
	6.1		ment Identifier Format	
	6.2		ical Functional Designations	
	6.3	Type I	Modifier	54
	6.4	Device	e-Specific Identifier Formats	55
		6.4.1	Receptacle Identifiers	
		6.4.2	Power Cables Associated with Identified Equipment	
		6.4.3	General Purpose Cables – Lighting & Receptacles	
		6.4.4	Junction Boxes - Power	
		6.4.5 6.4.6	Interlock Keys	
	<u>с</u> г		Wire Tags	
	6.5		pmponents	
		6.5.1	Tie Circuit Breakers	
	6.6		ples	
		6.6.1		
	6.7	Fire A	larm System Devices	68
		6.7.1	Identifier Format	
		6.7.2	Fire Alarm Device Designations	
		6.7.3	Drawing Format	
		6.7.4	Wire Tags	
	6.8		ity Devices	
		6.8.1	Device Identifier Format	
		6.8.2	Security Device Designations	
		6.8.3 6.8.4	Security Equipment Designations Equipment Subcomponent Designations	
		6.8.5	Wire Tags	
7	۸		on	
1				
	7.1		mentation	-
		7.1.1	Instrument Identifier Format	
		7.1.2	Drawing Format	
		7.1.3 7.1.4	Instrument Functional Designations	
		7.1.4	Loop Numbers Type Clarification	
		7.1.6	Valve Identification	
		7.1.7	Multi-Function Instruments	
		7.1.8	Additional Clarifications	
	7.2	Autom	nation Equipment	
		7.2.1	Identifier Format	
		7.2.2	Functional Designations	
		7.2.3	IT Equipment Designations	
	7.3	Autom	nation Cables	
		7.3.1	Instrumentation Cables	
		7.3.2	Cables Associated with Identified Equipment	
	7.4	Samp	le P&ID	
	7.5	•	Гадs	
	-		Power Circuits within Control Panels	
			Control Circuits	

		7.5.3	Analog Signal Circuits - Instruments	
		7.5.4	I/O Wiring	
7	<i>.</i> 6	Subco	mponents	
		7.6.1	Instrumentation Subcomponents	
		7.6.2	Panel Subcomponents	
7	.7	Softwa	are Configuration File Naming	
7	.8	I/O and	d Signal Tags	
		7.8.1	Discrete Input Signals	
		7.8.2	Discrete Output Signals	
		7.8.3	Analog Signals Generated From Equipment	
		7.8.4	Analog Measured Signals Generated From Instruments	
		7.8.5	Analog Output Signals	
		7.8.6	Control System Software Implementation	
8 C		7.8.6	Control System Software Implementation	
	Com	7.8.6 1 mun i	Control System Software Implementation	
8	Com 8.1	7.8.6 I mun i Identifi	Control System Software Implementation ication Equipment er Format	
8	Com 8.1 8.2	7.8.6 Imuni Identifi Functio	Control System Software Implementation ication Equipment ier Format onal Designations	
8 8 8	Com 8.1 8.2 8.3	7.8.6 Identifi Function Netwo	Control System Software Implementation ication Equipment ier Format onal Designations rk Cables	
8 8 8	Com 8.1 8.2 8.3	7.8.6 Identifi Function Netwo	Control System Software Implementation ication Equipment ier Format onal Designations	
8 8	Com 3.1 3.2 3.3 2 mdi	7.8.6 Identifi Functio Netwo	Control System Software Implementation ication Equipment ier Format onal Designations rk Cables	
8 8 8 Appe	Com 3.1 3.2 3.3 2 2 2 2 2 2 2 1 2 2 2 1 2 2 1 2 2 1 2 2 3 3 3 2 2 3 3 2 3 3 2 3 3 2 3 3 2 3 3 2 3 3 2 3 3 2 3 3 2 3 3 3 2 3	7.8.6 Identifi Function Netwo X A X B	Control System Software Implementation ication Equipment ier Format onal Designations rk Cables <i>Facility Codes</i>	
8 8 8 Appe Appe	Com 3.1 3.2 3.3 2 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1	7.8.6 Identifi Function Netwo ix A ix B ix C	Control System Software Implementation ication Equipment ier Format onal Designations rk Cables <i>Facility Codes</i> <i>Facility Area Codes</i>	

1 INTRODUCTION

This Water and Waste Department Identification Standard is to be referenced for consistent and accurate identification for all process, mechanical, electrical, and automation equipment. The standard also provides guidance regarding architectural room identification and communication equipment. This document provides clear guidance to department personnel, as well as external consultants, regarding appropriate equipment identification. A consistent standard has been developed for all Water and Waste groups, including Collections, Land Drainage, and Solid Waste (as applicable), however it is acknowledged that some exceptions for various groups may be required due to special circumstances, or existing established precedent.

1.1 Scope of the Standard

This identification standard applies to all City-owned Water and Wastewater facilities, which includes the following facilities:

- The Water Treatment Plant
- Regional water pumping stations
- The Shoal Lake Intake Facility
- Remote water facilities, including standpipes, valve chambers, boathouses, etc.
- Wastewater treatment facilities
- Wastewater lift stations
- Flood pumping stations
- Underpass sites
- Wastewater diversion stations
- Deep well locations
- Fountain locations
- Land drainage facilities
- Combined Sewer Overflow facilities
- Current and future remote wastewater sites (outfalls, valve chambers, etc).

1.2 Application

Existing facilities do not necessarily comply with this standard. The expectations regarding application of this standard to existing facilities must be decided on a case-by-case basis, however general guidelines for application are presented as follows:

- All new facilities must comply completely with this standard.
- All major upgrades to a facility, or a larger facility's area, must completely comply with this standard. Any existing equipment within the area being upgraded should be re-identified.
- All minor upgrades should utilize this standard as far as practical for new equipment, however in some cases compromise with the existing facility identification practice may be required.



For example, if adding a single pump to the WEWPCC facility, it is recommended to identify the pump as S230-P, rather than P-S230.

1.2.1 Re-identification

When equipment is re-identified to this new standard, it is recommended that the following be implemented:

- All equipment lamacoids and labels are to be replaced with the new identifier.
- All drawings that are being modified as part of the work are to utilize the new identifier. Major drawings such as P&IDs and Single Line Diagrams should display both the new and the old identifiers, in the following format:

New-Identifier

(was Old-Identifier)

• Generate a master equipment list with the new identifier, old identifier, and equipment description.

1.3 Document Revisions

Wastewater Planning and Project Delivery Branch (WWPPD) will issue revisions to the document on an as required basis. WWPPD will send out an email requesting review and comments by the division list below.

All proposed revisions shall be circulated to the following divisions and branches:

- Water Services Division
- Wastewater Services Division
- Solid Waste Services Division
- Engineering Division
 - Asset Management Branch
 - Design and Construction Branch
 - Drafting and Graphic Services Branch
 - Land Drainage and Flood Protection Branch
 - Wastewater Planning and Project Delivery Branch
 - Water Planning and Project Delivery Branch

After comments are incorporated into the finalized draft, WWPPD will send a copy of the approved PDF to the Business Communications Coordinator for upload to the Water and Waste Department Website.

Ĩ	Identification Standard	Revision:	04	Page	9 of 112
Winnipèg		Document Code	9:		

This page is intentionally blank.

2 GENERAL

2.1 General Identification Requirements

General identification requirements are as follows:

- Unambiguous Identity
 - All equipment identifiers shall be unique. No two pieces of equipment within the same facility are to share a common identifier.
- Consistency
 - The identification system is to be consistent across all facilities.
 - Prior to addition of a new identifier type, all new additions to the standard should be vetted by a group, to avoid inconsistent additions to the standard.
 - Spaces within identifiers are not permitted. For example, PNL M10 is not a substitute for PNL-M10.

Allowable characters in equipment identifiers are as follows:

- Uppercase letters A through Z
- Numerals 0 through 9
- Hyphen "-" (or underscore "_" in software packages where hyphens are not supported)
- Period "."(or underscore "_" in software packages where periods are not supported)

No other symbols or characters or spaces shall be utilized in an identifier.

2.2 Facility Code

Each City of Winnipeg facility is assigned a unique, four-digit facility code. The facility code is to be used on drawings and documentation as required. The facility code appears within all City drawing numbers, but need not be shown within the content of the drawing. The facility code is deemed an optional component of equipment and instrument identifiers, with the preference to omit the facility code to reduce the overall length of identifiers.

Systems such as a central Supervisory Control and Data Acquisition (SCADA) system that monitors multiple facilities are to make use of the facility code to segregate components by facility. The implementation of the facility code may be by means of a hierarchical directory system whereby individual components are stored under a folder that is named by the facility code. If the database or system where the identifier is being stored supports an additional field for the facility code, or is based upon a hierarchical system where the identifier can be placed as a component off of a root facility branch, it is deemed to be acceptable to omit the Facility Code in the instrument identifier. For example, the City's current Computerized Work Management System (CWMS) has an integral asset list, where a field is provided for the facility. In this case, the facility code for the equipment identifier would not be entered.

A complete list of facility codes is provided in Appendix A.

2.3 Area Code

The Area Code (also historically identified as Process Area Codes) identifies the physical area or building in which the equipment is located. A single letter character from A to Z represents a physical area. Some specific recommendations regarding implementation and designation of area codes are:

- For new construction, ensure that areas codes are allocated for a large enough area, such that the 26 available area codes are not exhausted.
- The Area Code represents the physical location of the equipment, not the equipment function. For example, a hot water pump located in the P area is designated as having a P area code, not a B (Boilers) area code. This is much more straightforward for both assignment and maintenance personnel.
 - Note however, that in some cases there are multiple pieces of equipment, all associated with the same primary piece of equipment, but in different locations with different area codes. In this case, the equipment Area Code should be selected based upon the major or primary equipment. For example, the motor starter for pump P-M101 would be identified as MS-M101, even if the motor starter is in the S area. The motor starter is directly associated with the pump and it would be confusing and unsafe to have different identifiers. An example is provided in Figure 6-4.
- For similar facilities, it is beneficial, but not mandatory, that similar process codes are utilized. For example, ideally the letter P should represent the Primary Clarifier area at all wastewater treatment plants, but would represent something different for water facilities.

The Area Codes for existing facilities are listed in Appendix B.



2.4 Functional Designations

The functional designation represents the function of the equipment. A complete list functional designations, for all disciplines, is shown in Appendix C.

It may be required to add new functional designations, where the existing list does not cover a new application. It is recommended that the following be reviewed prior to the addition of new designations:

- Functional designations for equipment are to be limited to a maximum of four characters. While most instrument designations will be four characters or less, it is possible to have up to five characters in a instrumentation designation, as per ISA 5.1.
- Utilize general, rather than specific, functional designations. For example, utilize the general pump designation P and avoid specific pump designations such as:
 - CWSP Chilled Water Supply Pump
 - CHRP Chilled Water Return Pump
 - ELP Effluent Lift Pump
 - CFP Chemical Feed Pump
 - SLP Sludge Pump
- Update the master list in Appendix C, and ensure there is no overlap with other disciplines.
- It is acceptable to re-utilize an existing designation at an existing facility, even if is not listed in Appendix C, if it is deemed that there are too many existing documentation references to modify. In this case, the designation will be a unique special case, and is not to be added to Appendix C.
- Consider the use of the letter U to designate the equipment if the quantity of the equipment is low.



2.5 Equipment Number

2.5.1 Uniqueness

The equipment number is a number utilized to identify a specific instance of a piece of equipment within a certain *Area Code*. Equipment numbers may be re-used within different *Area Codes*.

Generally, equipment numbers should be unique for each piece of equipment, but equipment that is functionally related, and has a one-to-one relationship, may (but is not required to) share a common equipment number. The overall equipment identifier must still be unique. See Figure 2-1 for an example.




Figure 2-1: Equipment Number Example – Functionally Related

Notes:

- 1. Electrical and mechanical equipment, that are not functionally related, must not share a common equipment number. For example, a MCC-M100, and a P-M100 should not exist within the same facility.
- 2. As per Sections 6 and 7, all related electrical and automation, including instrumentation, equipment identification will be based upon the associated Equipment Number. When proposing a common Equipment Number for multiple equipment items, consider the impact on the Electrical and Automation disciplines to ensure that the proposed numbering is effective for all disciplines.

15 of 112

2.5.2 Number of Digits

Equipment numbers will typically be comprised of three digits in medium to large size facilities. However in small facilities, with less than 50 equipment identifiers, it is permissible to utilize two digit equipment numbers. Use of two digit equipment numbers will be typical for most Collections facilities, such as wastewater lift stations and flood pumping stations. Note that where two digit equipment numbers are utilized, the instrument loop number will also be shortened by a digit, to a total of three digits. In addition, the NEWPCC Facility is very large and requires the use of four digit equipment numbers and five digit instrument loop numbers.

Table 2-1 : Identifier Length

Facility	Estimated Equipment Identifiers	Equipment Number of Digits	Instrument Loop Number of Digits	Example Equipment Number
Small	< 50	2	3	P-M01
Medium to Large	50 - 3000	3	4	P-M101
NEWPCC	> 3000	4	5	P-M1101

2.5.3 Equipment Number Ranges

For each facility, the equipment numbers are grouped and allocated in ranges to specific process functions. The range allocations are on a site by site basis, although efforts should be made to utilize common ranges for similar types of facilities.


Equipment number ranges are defined in Appendix D.

Note that for wastewater treatment plants, the WSTP Project Document Numbering Standard (IMS Document PG-RC-PC-05) identifies a Process Code. The Process Code is analogous to the Equipment Number Ranges, and both are indicated in Appendix D for wastewater treatment plants.


2.5.4 Sequential Logical Numbering

Provide equipment numbering with regards to logical sequencing of the equipment numbers as per process flow. Gaps in sequential numbering are acceptable and appropriate provided that they do not excessively waste equipment number ranges. Group process or equipment trains such they utilize a common range. See the examples in Figure 2-2.





Rotary Drum Thickener Train 1

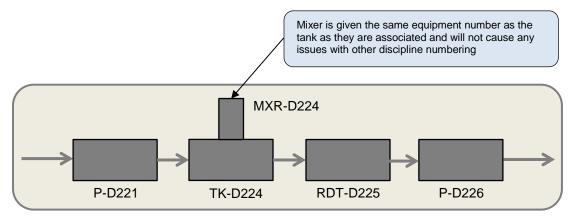

Rotary Drum Thickener Train 2

Figure 2-2 : Sequential Logical Numbering Example

2.5.5 Coordination with Equipment Descriptions

As far as practical, ensure that the last digit(s) of equipment numbers matches the equipment descriptions.

P-G201	The identifier for "Grit Pump 1"
P-G202	The identifier for "Grit Pump 2"

)©	Identification Standard	Revision:	04	Page	18 of 112
Winnipeg	identification Standard	Document Code:			

2.5.6 Additional Requirements for Wastewater Treatment Facilities

2.5.6.1 Coordination of Equipment with Electrical Power Supply

The majority of electrical distribution within wastewater treatment facilities is typically configured in a redundant manner. Where redundant electrical distribution is provided, identify the electrical distribution such that the distribution normally fed from Bank 1 ends in an odd number and the distribution normally fed from Bank 2 ends in an even number.

For equipment, as far as practical, provide:

- An odd equipment number for equipment fed from an odd numbered electrical distribution equipment.
- An even equipment number for equipment fed from an even numbered electrical distribution equipment.

Examples:

P-G201	Fed from MCC-G701, which is connected ultimately to Bank 1.
P-G204	Fed from MCC-G702, which is connected ultimately to Bank 2.

2.6 Subcomponents

In some cases, it is appropriate for equipment to be designated as a component of another identified piece of equipment, rather than an independent unit. Equipment subcomponents will typically be expressed as using a dot "." field, followed by the subcomponent identifier.

2.6.1 Subcomponent Identifier Format

E*	SSSS	-	Ν
Equipm Identifie	Subcomponent Functional Designation	-	Subcomponent Number

Where,

E*	is the <i>Equipment Identifier</i> , of the base equipment, as designated in this document.
SSSS	is the <i>Subcomponent Functional Designation</i> , which is one to four letters. Typical subcomponent designations are shown in other sections of this document.
Ν	is the <i>Subcomponent Number</i> , an optional field to be utilized when there are multiple subcomponents within the base equipment.

Some examples of subcomponents are as follows:

CMP-R521.LOP	Lube oil pump for compressor CMP-R521, where the pump is integrated into the compressor skid and driven by the compressor motor.
PNL-P712.MCB	Panelboard PNL-P712 main breaker
VFD-G612.RCTR-1	Line reactor for VFD-G612 (integrated in VFD enclosure)

In a full hierarchical system, almost every piece of equipment could potentially be viewed as a subcomponent or child of another system. For example, an agitator could potentially be viewed as a component of a tank. However, this approach would lead to an extensive hierarchical system that is not recommended for general plant identification. Thus, the following rules of thumb are presented as a guide for classification of an item as a subcomponent.

Identification of a device as a subcomponent should be considered when:

- The device is a constituent component that is physically enclosed in, or attached to, the larger equipment;
- The device is normally grouped as a component of the larger equipment when the equipment is purchased; and
- Operations personnel would normally refer to the device as a component of the larger equipment, rather than a separate device.

2.6.2 Use of Subcomponent System

It is deemed that there are numerous benefits to utilizing the subcomponent system, as indicated below:

- Due to the naming structure of subcomponents, it is clear as to what parent component the subcomponent belongs to.
- Subcomponents allow for smaller instrument bubbles to show functionality such as limit switches, without wasting drawing space. For devices such as large multi-turn actuators, with internal torque switches, hand switches, and limit switches, as well as many other types of equipment, this can be a significant savings in drawing space without any loss of identification capability.
- The use of subcomponents helps avoid the case where the subcomponent devices are placed on the equipment or instrument list, and confuse personnel because they cannot be found in the field. This is also particularly important to construction personnel, who must coordinate the purchase, storage, installation, and commissioning of these devices.
- The use of subcomponents aligns more closely with the current direction of control system software implementations, where the database and system model have hierarchical attributes, rather than a simple linear list of tags.



20 of 112

2.6.3 Subcomponent Examples

Two examples of the use of subcomponents are shown in Figure 2-3 and Figure 2-4.

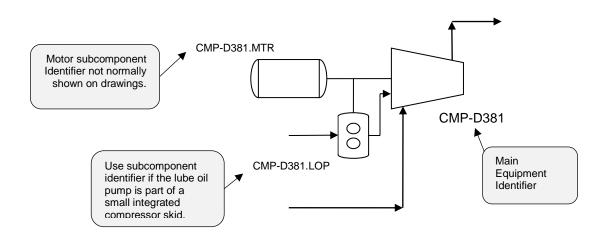


Figure 2-3 : Lube-Oil Pump Subcomponent Example

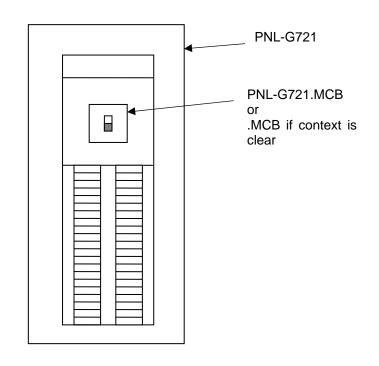


Figure 2-4 : Electrical Subcomponent Example – Main Circuit Breaker



٢

Winnipeg

3.1 Room Identifier

It is required to identify room numbers for architectural purposes and to allow for identification of specific equipment that is associated with rooms. Fire alarm system and security system component identification, as discussed in Sections 6.7 and 6.8, are associated with room numbers. Room numbers will be identified as follows:

FFFF	-	RM	-	Α	-	L	RR	S
Facility Code (Optional)	-	Room Designation	-	Area Code	-	Level	Room Number	Suffix (Optional)

Where,

FFFF	is the <i>Facility Code</i> , from Appendix A. The <i>Facility Code</i> will typically be implied, and would only be fully written where required.
RM	is the Room Designation, which is comprised of the letters RM.
А	is the Area Code, which is based on Section 2.3.
L	is the <i>Level</i> , which shall typically be one or two characters, as described in Section 3.1.1.
RR	is the <i>Room Number</i> , which shall typically be two digits, except as described in Section 3.1.1.
S	is the <i>Suffix</i> , which can be utilized to indicate room divisions as required. This should only be utilized for cases such as rooms that are divided by a movable barrier.

Examples:

RM-S-115	Room 15 in the Secondary Clarifier area, on the main level.
RM-M-222	Room 22 in the Main Building area, on the second level.
RM-G-BA9	Room 9 in the Grit area, lower level 2.

Note: A hyphen is utilized between the Area Code and level, to ensure that room numbers are not potentially confused with equipment numbers.

3.1.1 Building Level Designation

The building level designation shall be based upon Table 3-1 below.

Level	Description	Room Number Digits	Example
4	Fourth Floor	2	RM-M-405
3	Third Floor	2	RM-M-320
2	Second Floor	2	RM-M-251
1	Main / First Floor	2	RM-M-123
В	Lower Level 1 / Basement	2	RM-M-B52
BA	Lower Level 2	1	RM-M-BA5
BB	Lower Level 3	1	RM-M-BB1
EX	Exterior (See Note 4)	1	RM-M-EX1

Table 3-1 : Building Level Identifiers

Notes:

- 1. Level 1 should be the uppermost floor entered at grade or at most, one half stair flight above.
- Large mezzanines shall be numbered as a whole floor. Example: When a mezzanine exists between the first floor and the next whole floor, it will be numbered as the second floor and the next whole floor would be the 3rd floor.
- 3. Usable attic floors and penthouse levels should be numbered as if they are whole floors. For example, a two-story penthouse atop a three floor building will be numbered as the fourth and fifth floors. Do not use prefixes such as "R" for roof level.
- 4. Use of the EX designation for exterior spaces is optional. One example where this designation may be required is for outdoor security equipment. It is recommended that the outdoor space be designated into zones, which replace the room number.



3.1.2 Drawing Representation

Room numbers on drawings may be presented as shown in Figure 3-1. Note that the room designation "RM" may be omitted on drawings, when used with the ellipse symbol.




Figure 3-1 : Room Numbering on Drawings – Plan View

3.1.3 Room Numbering Guidelines

Utilize the following as a guide for room numbering:

- Numbers should flow from one end of the building to the other.
- Where corridors are present, use odd numbers on one side of a corridor and even numbers on the other side.
- Skip numbers as required to maintain succession of room numbering
 - In some instances, room numbers on one side of a corridor shall be skipped in order to maintain succession with the room numbers on the opposite side of the corridor. This may occur, for example, when a suite of rooms or large space is accessed through a single door and there are no other doors on that same side until further down the corridor. This will allow for future renovations that may convert suites or large spaces into separate or small rooms with a corridor door.
- Provide all accessible spaces with room numbers.
 - In addition to rooms, all interior spaces that can be directly accessed, such as corridors, vestibules, stairwells, elevator shafts, and accessible pipe spaces shall be numbered in a manner as consistent as possible with standard room spaces. Where doors or walls separate different areas of these spaces, each area shall receive its own unique number.
- Room numbers shall be assigned in a cohesive fashion between existing, new and modified facilities. Duplicate room numbers are not permitted under any circumstance.
- Identify stairwells with a single room identifier, with the main floor as the level. If the stairwell is not accessible from the main floor, utilize the access level closest to the main floor as room level designation. See Figure 3-2 for examples.



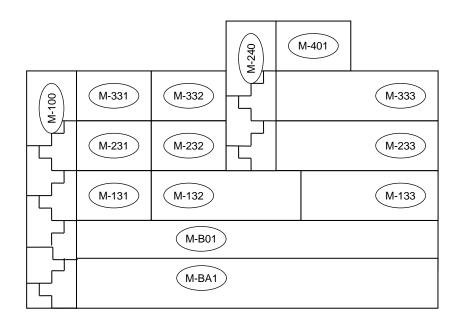


Figure 3-2 : Stairwell Identification Examples – Elevation View

• Rooms that span multiple levels should be identified with a level corresponding to the primary access level. See Figure 3-2 for examples of multi-level room identification.




Figure 3-3 : Multi-Level Room Examples – Elevation View

3.2 Door Identification

It is required to identify door identifiers for architectural purposes and to allow for identification of specific equipment that is associated with rooms. Security system component identification, as discussed in Sections 6.8, are associated with door identifiers. Doors will be identified as follows:

FFFF	-	D	-	Α	-	L	RR	S
Facility Code (Optional)	-	Door Designation	-	Area Code	-	Level	Room Number	Suffix

Where,

FFFF	is the <i>Facility Code</i> , from Appendix A. The <i>Facility Code</i> will typically be implied, and would only be fully written where required.
D	is the Door Designation, which is comprised of the letter D.
А	is the Area Code, which is based on Section 2.3.
L	is the <i>Level</i> , which shall typically be one or two characters, as described in Section 3.1.1.
RR	is the <i>Room Number</i> , which shall typically be two digits, except as described in Section 3.1.1.
S	is the <i>Suffix</i> , which is utilized to indicate the specific door. Double doors are to be identified with a single identifier.

Examples:

D-S-115A	Door A for Room 15 in the Secondary Clarifier area, on the main level.

D-M-222C Door C for Room 22 in the Main Building area, on the second level.	-M-222C	or Room 22 in the Main Building area, on the second level.
---	---------	--

D-G-BA9A Door A for Room 9 in the Grit area, lower level 2.

Ĩ	Identification Standard	Revision:	04	Page	26 of 112
Winnipèg		Document Code	9:		

This page is intentionally blank.



4 MECHANICAL / PROCESS EQUIPMENT

4.1 Identifier Format

Mechanical / process equipment will be identified as follows:

FFFF	-	EEEE	-	Α	NN(N)(N)	-	XX
Facility Code (Optional)	-	Equipment Functional Designation	-	Area Code	Equipment Number	-	Component Number (Optional)

Where,

	FFFF	is the <i>Facility Code</i> , from Appendix A. The <i>Facility Code</i> will typically be implied, and would only be fully written where required.
	EEEE	is the <i>Equipment Functional Designation</i> , which is comprised of 1 to 4 characters from Section 4.1.14.2.
	А	is the Area Code, which is based on Section 2.3.
	NN(N)(N)	is the <i>Equipment Number</i> of the associated equipment. This will be three digits for medium to larger facilities, two digits for smaller facilities, such as Collections facilities, and four digits for very large facilities (NEWPCC).
	XX	is the optional Component Number, which can be one or two digits, and shall be applied as per Section 4.1.1.
Examp	les:	
	CMP-G201	A compressor in the G area.
	P-M645	A glycol pump in the M area.

- R-R102 An oxygen reactor in the R area.
- SF-F61 A supply fan in a flood station. Note the two digit equipment number for Collections facilities.
- P-L01 The first lift pump in a wastewater lift station. Note that the equipment number for collections facilities in only two digits long.
- UH-K631-2 The second unit heater that is controlled by the same thermostat or PLC output as unit heater K-631-1 (the unit heaters will always be on simultaneously)

4.1.1 Component Numbers

Component Numbers are suffixes to equipment numbers that are utilized to designate multiple components of a single system. Component numbers will increment starting at 1. Use of a component number is only acceptable if:

- The equipment with the same Equipment Number is functionally associated, and
- The equipment has no associated process control or the process control is common or the equipment is part of a common skid package.

Component Numbers shall not be utilized in the following scenarios:

- To address a shortage of available equipment numbers in a given series;
- Where the equipment is not functionally associated; or
- Where the equipment can be manually or automatically controlled to run independently.

Note: Use of the Component Number should not be common.

Examples of acceptable uses of Component Numbers:

If AHU-G634 is an air handler, and there is more than one fan in the air handler, it is acceptable to utilize component numbers to designate the individual fans.

4.2 Functional Designations

The functional designation represents the function of the equipment. A complete list functional designations is shown in Table 4-1.

Functional Designation	Description	Notes
AD	Air Dryer	
AF	Aeration Fan	
AG	Agitator	
AHU	Air Handling Unit	Includes make-up air unit.
В	Blower	
BD	Balance Damper	See Section 5.2.5.
BDD	Backdraft Damper	See Section 5.2.5.
BFP	Back Flow Preventer	
BLR	Boiler	
BS	Bar Screen	Use SCR
BV	Balancing Valve	Manual mechanical balancing valve (not typically adjusted by operations). See Section 5.2.3
BVA	Automatic Balancing Valve	Automatic mechanical balancing valve. See Section 5.2.3
CAL	Calibration Column	
CC	Cooling Coil	
CDR	Condenser	
CE	Centrifuge	
CHLR	Chiller	
СМ	Clarifier Mechanism	
CMP	Compressor	
CNV	Conveyor	Includes skimmers

 Table 4-1 : Process / Mechanical Equipment Functional Designations

Functional Designation	Description	Notes
CRN	Crane	
СТ	Cooling Tower	
CU	Condensing Unit	
CV	Check Valve	See Section 5.2
CYC	Cyclone	
EDU	Eductor	
EF	Exhaust Fan	
F	Fan - General	
FA	Flame Arrestor	
FC	Fan Coil	
FD	Fire Damper	See Section 5.2.5. Utilize same equipment number as air handler / fan.
FDR	Feeder	Examples screw feeder, chlorinator, glycol make-up unit
FEX	Fire Extinguisher	
FG	Flap Gate	
FIL	Filter	
GR	Grille / Louvre – General	
GRD	Grille – Diffuser	See Section 4.3.
HC	Heating Coil	
HCE	Heating Coil, Electric	Duct based heater.
HE	Heat Exchanger	
НО	Hoist	
HOP	Hopper	
HP	Heat Pump	
HRC	Heat Recovery Coil	
HTR	Heater	General heaters, radiant, convectors, etc.
НИМ	Humidifier	
HV	Hand/Manual Valve	See Section 5.2
INJ	Injector	
MXR	Mixer	
OD	Overhead Door	
Р	Pump	
PCV	Pressure Control Valve (Pressure Regulator)	See Section 5.2.3
PSV	Pressure Safety/Relief Valve	See Section 5.2.3
R	Reactor (various processes)	

Functional Designation	Description	Notes
RDT	Rotary Drum Thickener	
RES	Reservoir	Large water containment structure.
S	Skid Package	
SA	Sampler	
SCBR	Scrubber	
SCR	Screen	Utilized for screening systems such as bar screens and perforated plate screens.
SD	Smoke Damper	See Section 5.2.5. Utilize same equipment number as air handler / fan.
SF	Supply Fan	
SL	Stop Logs	See Section 5.2.3
SLG	Sluice Gate	May only be utilized within existing facilities where the use of the SLG identifier is well established. The designation may not to be utilized for new or upgraded WSTP facilities. Identify as a valve (HV, XV, FV, etc).
STR	Strainer	See Section 5.2
тк	Tank	
TU	Terminal Unit (HVAC)	Includes CAV/VAV/Dual Duct boxes. Dampers are to be identified as per Section 7.1 – Instrumentation.
U	Miscellaneous Equipment Not In List	e.g. water softener
UH	Unit Heater	
UVR	Ultra-Violet (UV) Reactor	
V	Vessel, Pressure Vessel	e.g. air receiver, glycol expansion tank
W	Weir	
WCP	Washer / Compactor	Typical for wastewater screenings
WGB	Waste Gas Burner	

Notes:

- 1. Equipment Functional Designations are to be unique, including electrical, automation, communication, and security equipment. Instrument Functional Designations may overlap Equipment Functional Designations.
- 2. See Appendix C for a master list of Equipment Functional Designations.



4.3 HVAC Grilles

HVAC grilles, louvres and diffusers, will be identified as follows:

FFFF	-	EEEE	-	Α	NN(N)(N)	-	XX
Facility Code (Optional)	-	Equipment Functional Designation	•	Area Code	Equipment Number	-	Component Number

Where,

FFFF	is the <i>Facility Code</i> , from Appendix A. The <i>Facility Code</i> will typically be implied, and would only be fully written where required.
EEEE	is the <i>Equipment Functional Designation</i> , which is comprised of 2 to 4 characters from Section4.2.
A	is the Area Code, which is based on Section 2.3.
NN(N)(N)	is the <i>Equipment Number</i> of the associated equipment. Where an equipment number is not associated, allocate an equipment number.
XX	is the <i>Component Number</i> , which can be one or two digits, and will increment starting at 1.

GRD-M645-1	The first diffuser grille associated with SF-M645.
GR-P682-1	Intake louvre associated with SF-P682.
GR-P682-22	The 22 nd grille associated with SF-P682.

4.4 Subcomponents

The following designations are to be utilized for mechanical equipment subcomponents. See Section 2.6 for general rules on application of subcomponents.

 Table 4-2 : Mechanical Equipment Subcomponents

Subcomponent Designation	Description	Notes
CMP	Compressor	e.g. component of a chiller.
F	Fan	
CC	Cooling Coil	May be a subcomponent of a AHU
HC	Heating Coil	May be a subcomponent of a AHU
HRC	Heat Recovery Coil	May be a subcomponent of a AHU
LOP	Lube Oil Pump	
MTR	Motor	
SWP	Swash Plate	
VSD	Variable Speed Drive	Includes fluid couplings and magnetic couplings. Utilize electrical VFD designation for variable frequency drives.

P-G261.MTR	The motor associated with P-G261.
CMP-M502.LOP	The lube oil pump associated with compressor CMP-M502.
CHLR-M621.CMP-1	Compressor 1 of chiller CHLR-M621.



5 PIPING AND DUCT

5.1 Pipe and Duct Designation

The identification format for piping and ductwork is as follows.

Р	-	CCC	-	MMNN	-	SNN	-	LLLL
Pipe Nominal Size	-	Fluid Commodity Code	-	Pipe Specification Code (Optional)	-	Insulation Specification Code (Optional)	-	Line Number (Optional)

Where,

Ρ	is the nominal pipe size in millimetres, and may be from 1 to 4 digits. See Table 5-1. For rectangular conduits and ducts, express the size as width x height. See example below.
CCC	is the Fluid Commodity Code, which is 2 to 4 characters from Section 5.1.2.
MMNN	is the optional <i>Pipe Specification Code</i> , where MM is the material from Table 5-3, and NN is a number referencing the specific specification. Note that MM must be letters. See Notes 1 and 2.
SNN	is the optional <i>Pipe Specification Code</i> , where S is the insulation material / type from Table 5-4, and NN is a number indicating the thickness of the insulation in mm. Note that S must be a letter.
LLLL	is the optional <i>Line Number</i> . The <i>Line Number</i> must be unique across the entire facility, for each <i>Fluid Commodity Code</i> . See Note 3.

Note:

- 1. It is recommended that a common set of pipe specifications be developed for each type of facility.
- 2. For existing facilities, where the exact pipe specification is not known, the Pipe Specification Code may be omitted.
- 3. It is not expected that Line Numbers will be utilized on all projects. Coordinate with the City project manager for specific requirements regarding the applicability of Line Numbers.
- 4. The Fluid Commodity Code together with the Line Number must be unique across the facility, where Line Numbers are utilized.

150-PW-CS11	A 150mm (6") potable water pipe, with specification code CS11. No line numbers utilized.
600-RAS	A 600mm (24") Return Activated Sludge pipe, with an unknown pipe specification and no line number.
600x1200-SE	A 600 x 1200mm secondary effluent conduit. The pipe/conduit specification and line number are not specified.
25-CLG-SS31-1151	A 25mm (1") chlorine gas pipe, with pipe specification SS31, and line number 1151.

400-RW-CS52-1151 A 400mm (16") chlorine gas pipe, with pipe specification SS31, and line number 1151. Note that this could be in the same facility as piping 25-CLG-SS31-1151.
1350-TRW-040 A 1350mm diameter treated water pipe. The pipe specification code

I-040 A 1350mm diameter treated water pipe. The pipe specification code is omitted. The line number code 040 is differentiated from the pipe specification code in that it does not begin with a letter.

5.1.1 Nominal Pipe Sizes

Table 5-1 : Nominal Pipe Sizes (Metric)

mm	Inches	mm	Inches	mm	Inches	mm	Inches
6	1/8	80	3	275	11	750	30
8	1⁄4	90	3 1⁄2	300	12	800	32
10	3/8	100	4	350	14	850	34
15	1/2	112	4 1⁄2	400	16	900	36
20	3⁄4	125	5	450	18	950	38
25	1	150	6	500	20	1000	40
32	1 ¼	175	7	550	22	1100	44
40	1 ½	200	8	600	24	1200	48
50	2	225	9	650	26	1300	52
65	2 1⁄2	250	10	700	28	1400	56

5.1.2 Fluid Commodity Codes

Table 5-2 : Fluid Commodity Code Designations

Code	Commodity - Water	Commodity - Wastewater			
AA	Aqua Ammonia				
AHP	Air, High Pressure	Air, High Pressure			
ALP	Air, Low Pressure	Air, Low Pressure			
AS	Air Scour				
BLS		Ballasted Sludge			
BS	Brine Solution				
BSD		Biosolids, Dewatered			
BSL		Biosolids, Liquid			
BWS	Backwash Supply				
BWW	Backwash Wastewater				
CA	Compressed Air	Compressed Air			
CCW	Circulating Cooling Water				
CDR	Condenser Water Return	Condenser Water Return			
CDS	Condenser Water Supply	Condenser Water Supply			
CE		Centrate			
CEF		Centrate - Final			
CEI		Centrate - Intermediate			
CG		Calibration Gas			
CHR	Chilled Water Return	Chilled Water Return			
CHS	Chilled Water Supply	Chilled Water Supply			
CL2	Chlorine	Chlorine			
CLG	Chlorine Gas				
CLS	Chlorine Solution				
CO2	Carbon Dioxide	Carbon Dioxide			
CON		Condensate (including Digester Gas Condensate)			
CRW	Clarified Discharge Water				
CS	Caustic (Sodium Hydroxide)	Combined Sewer			
CWR	Cooling Water Return	Cooling Water Return			
CWS	Cooling Water Supply	Cooling Water Supply			
D	Drain	Obsolete (was Drain non- process) Use SAN or LDS			
DCW	Domestic Cold Water	(use PW)			
DD	Deacon Effluent (Post UV)				
DDW	Demineralized Water				

Code	Commodity - Water	Commodity - Wastewater
DEA	Dilute Acid	
DEC	Dilute Caustic	
DF	DAF Float	
DG		Digester Gas
DGC		Digester Gas - Conditioned
DGH		Digester Gas, High Pressure
DFR	Diesel Fuel Return	Diesel Fuel Return
DFS	Diesel Fuel Supply	Diesel Fuel Supply
DHR	Domestic Hot Water Return	Domestic Hot Water Return
DHW	Domestic Hot Water	Domestic Hot Water
DL		Decant Liquor
DP		Dry Polymer
DRA	Drainage (Floors)	
DRN	Drains (Clean Drains)	
DRS	Subdrain	
DS	Deacon Suction	Digester Sludge
DSW	Distilled Water	
DU	Deacon UV (Pre UV)	
EA		Exhaust Air
EE	Engine Exhaust	
ES	Electric Supply	Electric Supply
EXP	Expansion Tank Equalizer Line	
FC	Ferric Chloride	Ferric Chloride
FE		Final Effluent
FED	Filter Media Eduction	
FIN	Filter Influent	
FIR	Firewater	
FLT		Filtrate
FOA		Foul Air
FOR	Fuel Oil Return	
FOS	Fuel Oil Supply	
FOV	Fuel Oil Vent	
FPG	Fire Protection Glycol Solution	Fire Protection Glycol Solution
FPW	Fire Protection Water	Fire Protection Water
FSF		Fermented Sludge Filtrate
FSL		Fermenter Sludge
FSU		Fermenter Supernatant
FSW		Flushing Water

Code	Commodity - Water	Commodity - Wastewater			
		(Plant Effluent Water)			
FTR	Filter To Recycle				
FW	Filtered Water				
GE		Grit Effluent			
GOX	Gaseous Oxygen				
GR	Glycol Return	Glycol Return			
GRS		Grit Slurry			
GRT		Grit (Solids / Dewatered)			
GS	Glycol Supply	Glycol Supply			
HCO	Hydraulic Oil	Hydraulic Oil			
HFS	Hydrofluosilicic Acid				
HFW		Hot Flushing Water			
HP	Hydrogen Peroxide				
HPS	High Pressure Steam				
HR	High Pressure Condensate				
HRE		High-Rate clarifier Effluent			
HRS		High-Rate clarifier Sludge			
HST	12% Hypochlorite Solution				
HWS		Hot Water Supply			
HWR		Hot Water Return			
H2		Hydrogen			
HYP	0.8% Hypochlorite Solution				
IAS	Instrument Air Supply	Instrument Air Supply			
LCP		Liquid Concentrated Polymer			
LDS		Land Drainage Sewer			
LGO	Lubricating Oil	Lubricating Oil			
LOX	Liquid Oxygen	Liquid Oxygen			
LPC	Low Pressure Condensate				
LPS	Low Pressure Steam	Low Pressure Steam			
MA		Mixed Air			
MC		Magnesium Chloride			
MET		Methanol			
ML		Mixed Liquor			
MP		Mixed Polymer			
MPC	Medium Pressure Condensate				
MPS	Medium Pressure Steam				
MU	Make-Up Water				
N2		Nitrogen Gas			

Code	Commodity - Water	Commodity - Wastewater
N2L		Nitrogen Liquid
NG	Natural Gas	Natural Gas
NPH		Non-Potable Water - Hot
NPT		Non-Potable Water - Tempered
NPW		Non-Potable Water (Potable Water segregated by backflow preventer and for general use such as hose bibs and pump seals)
OA		Outdoor Air
O2		Oxygen Gas
OF	Overflow	
OZG	Ozone Off Gas	
OZO	Ozonated Oxygen	
OZW	Ozonated Water	
PRO	Propane	
PC	Pumped Condensate	
PD		Process Drain
PE		Primary Effluent
PEF	Phosphate Feed	
PLD	Dry Polymer	
PLS	Polymer Solution	
PO		Process Overflow
PS		Primary Sludge
PSW	Plant Service Water	
PV		Process Vent
PW	Potable Water	Potable Water
R	Refrigerant	Refrigerant
RA		Return Air
RAS		Return Activated Sludge
RD	Roof Drain	
RS		Raw Sewage
RW	Raw Water	Rain/Roof Water
RWL	Rain Water Leader	
SA		Supply Air
SAM	Sample	Sample
SAN	Sanitary Drainage	Sanitary Drainage
SBS	Sodium Bisulphite	Sodium Bisulphite
SC		Scum

Code	Commodity - Water	Commodity - Wastewater
SCA	Sulphuric Acid	
SCB		Sodium Carbonate (Soda Ash)
SCD		Scum - Dewatered
SCP		Scum - Primary
SCRS		Screened Raw Sewage
SCS		Screenings
SDR	Saturated Recycle Water	
SE		Secondary Effluent
SEA		Service Air
SHC	Sodium Hypochlorite	Sodium Hypochlorite
SHD		Sodium Hydroxide
SLC		Sludge Cake
SLH		Sludge – Hauled
SLI		Sludge - Dewatered
SLO	Seal Oil	
SLP		Sludge – Phosphorus Released
SLS		Sludge - Screened
SLU	Sludge	
SND		Sand (solid)
SNS		Sand Slurry
SPD	Sump Pump Discharge	Obsolete (was Sump Pump Discharge) Use SAN or LDS.
SRS		Storm Relief Sewer
SSC		Scum - Secondary
STD	Salt Dry	
STS		South End Thickened Sludge
SUB		DAF Subnatant
SUP	Supernatant	
SVT		Struvite
SW	Seal Water	Seal Water (only used for separately derived systems. Typically NPW is utilized for seal use).
SWD	Stormwater Drainage	
TBS		Thickened Bottom Sludge
TCE		Treated Centrate
TDW	Tempered Domestic Water	Tempered Domestic Water
TFS		Thickened Fermented Sludge

Code	Commodity - Water	Commodity - Wastewater
ТО		Thermal Oxidizer
TRW	Treated Water	
TS		Thin Sludge
TW	Tempered Water	
TWAS		Thickened Waste Activated Sludge
VAC	Vacuum	Vacuum
VTA	Vent To Atmosphere	Vent to Atmosphere
W		Water
WA		Waste Air
WAS		Waste Activated Sludge
WS	Softened Water	
WSF		Waste Activated Sludge Filtrate
WWS		Wastewater Sewer

5.1.3 Piping Material

Table 5-3	Piping	and	Tubing	Material
-----------	--------	-----	--------	----------

Designation	Description
AL	Aluminum and Alloys
BA	Aluminum Bronze
GS	Galvanized Carbon Steel
CS	Carbon Steel
CU	Copper
DI	Ductile Iron
FP	Fiberglass Reinforced Plastic
КВ	Concrete
PA	ABS (Acrylonitrile-butadiene styrene)
PD	HDPE (High Density Polyethylene)
PF	PFA (Perfluoroalkoxy)
PK	PVDF (Polyvinylidene Fluoride, i.e. Kynar®)
PP	PP (Polypropylene)
PV	PVC (Polyvinyl Chloride)
SS	Stainless Steel



5.1.4 Insulation Material / Type

Table 5-4 : Insulation Material / Type

Designation	Description
E	Elastomeric - flexible pipe insulation, closed cell structure (ASTM C534)
F	Fibreglass, UL-rated, preformed, sectional rigid with factory applied, Kraft paper with aluminum foil vapor barrier jacket
G	Cellular glass.
М	Mineral fibre (ASTM C553).
S	Calcium Silicate (ASTM C533)

5.2 Piping and Duct Components

5.2.1 Manual Valve Identifier Format – Minor Valves

The identification format for minor manual valves (and dampers), without instrumentation, is as follows.

FFFF	-	HV	-	Α	NN(N)(N)	S
Facility Code (Optional)	-	Manual Valve Designation	-	Area Code	Equipment Number	Suffix

Where,

FFFF	is the <i>Facility Code</i> , from Appendix A. The <i>Facility Code</i> will typically be implied, and would only be fully written where required.
HV	is the Manual Valve Designation.
А	is the Area Code, which is based on Section 2.3.
NN(N)(N)	is the <i>Equipment Number</i> of the associated equipment. If no equipment is associated, allocate an <i>Equipment Number</i> specific for the applicable valve or group of valves.
S	is the <i>Suffix</i> , a single letter to designate the specific valve. Always apply a suffix, regardless if there are one or more valves with the same equipment number. Where there are insufficient letters (A-Z), double letters may be utilized (AA through ZZ). The requirement to utilize double letters should be rare.

Notes:

- 1. Manual valves, check valves, and strainers may utilize common equipment numbers and suffixes. For example, it is acceptable to have a HV-G638A and a CV-G638A.
- 2. Large valves and controlled valves will be identified via the instrumentation standard identified in Section 7.1.
- 3. Typically, significant valves not associated with a specific piece of equipment would be identified as per Section 5.2.2, however the designers discretion may be applied.

Ĩ	Identification Standard	Revision:	04	Page	43 of 112
Winnipeg		Document Code:			

Examples:

HV-G201A A manual valve in the G area, associated with pump P-G201.

- HV-M645B A manual valve in the M area.
- HV-R102A A manual valve in the R area.




Figure 5-1 : Valve Identification

)©	Identification Standard	Revision:	04	Page	44 of 112
Winnipeg	identification Standard	Document Code:			

5.2.2 Manual Valve Identifier Format – Major Valves and Valves with Instrumentation

The identification format for major valves (and dampers) and any manual valve (and damper) with instrumentation, is based upon the instrumentation standard identified in Section 7.1. The format of the identifier is as follows.

FFFF	-	HV	-	Α	NN(N)(N)	Т
Facility Code	-	Manual Valve	-	Area Code	Equipment Number	Instrument Number
(Optional) Designation Loop Nu		Loop Numb	er			

Where,

FFFF	is the <i>Facility Code</i> , from Appendix A. The <i>Facility Code</i> will typically be implied, and would only be fully written where required.
ΗV	is the Manual Valve Designation.
А	is the Area Code, which is based on Section 2.3.
NN(N)(N)	is the <i>Equipment Number</i> of the associated equipment. If no equipment is associated, allocate an <i>Equipment Number</i> specific for the applicable valve or group of valves.
Т	is the <i>Instrument Number</i> , where the number increments from the number 1 through 9. Use of the number 0 should be infrequent, reserved for special instruments or those where the instrument ending with 0 is a common instrument that serves other instruments.
NN(N)(N)T	is the Loop Number, comprised of the <i>Equipment Number</i> together with the <i>Instrument Number</i> .

HV-G2011	A manual valve in the G area, associated with pump P-G201, and contains open and closed limit switches.
HV-M6451	A manual valve in the M area, with a position transmitter.
HV-R1022	A manual valve in the R area, with a limit switch.
UT-S1510	A multi-variable transmitter that connects to multiple sensors from various loops. Note the use of the 0 for the Instrument Number for this special case where it is handling multiple loops.

5.2.3 Manual Valve Identifier Format – Instrumentation Isolation and Bypass Valves

The identification format for minor instrumentation isolation and bypass valves, is as follows. Identification of simple, small isolation valves (i.e. gauge pressure transmitter) is not mandatory.

FFFF	-	HV	-	Α	NN(N)(N)	Т	S
Facility Code	-	Manual Valve	-	Area Code	Equipment Number	Instrument Number	Suffix
(Optional)		Designation			Loop Numb	er	

Where,

FFFF	is the <i>Facility Code</i> , from Appendix A. The <i>Facility Code</i> will typically be implied, and would only be fully written where required.
HV	is the Manual Valve Designation.
А	is the Area Code, which is based on Section 2.3.
NN(N)(N)	is the Equipment Number of the associated equipment.
Т	is the <i>Instrument Number</i> , where the number increments from the number 1 through 9. Use of the number 0 should be infrequent, except for special instruments, or those where the instrument ending with 0 is a common instrument that serves other instruments.
NN(N)(N)T	is the Loop Number, comprised of the <i>Equipment Number</i> together with the <i>Instrument Number</i> .
S	is the <i>Suffix</i> , a single letter to designate the specific valve. Always apply a suffix, regardless if there are one or more valves with the same equipment number. Where there are insufficient letters (A-Z), double letters may be utilized (AA through ZZ). The requirement to utilize double letters should be rare.

Notes:

1. The Loop Number will typically be the nearest associated instrument. In some cases, Loop Numbers may be designated for allocation of manual valves.

5.2.4 Miscellaneous Piping Equipment Identifier Format

Miscellaneous piping equipment, which includes the following:

- Balancing Valves (Manual and Automatic)
- Check Valves
- Strainers
- Pressure Regulators (Pressure Control Valves)
- Pressure Safety Valves
- Stop Logs

are to be identified as follows:

FFFF	-	EEE	-	Α	NN(N)(N)	S
Facility Code (Optional)	1	Equipment Functional Designation	-	Area Code	Equipment Number	Suffix

Where,

FFFF	is the <i>Facility Code</i> , from Appendix A. The <i>Facility Code</i> will typically be implied, and would only be fully written where required.
EEE	is the <i>Equipment Functional Designation</i> , which is comprised of 2 to 4 characters from Section 4.2.
А	is the Area Code, which is based on Section 2.3.
NN(N)(N)	is the Equipment Number of the associated equipment.
S	is the Suffix, a single letter to designate the specific valve.

Notes:

- 1. The Equipment Number will typically be the nearest associated equipment. In some cases, Equipment Numbers may be designated for allocation of miscellaneous piping equipment.
- 2. Miscellaneous Piping Manual valves, check valves, and strainers may utilize common equipment numbers and suffixes. For example, it is acceptable to have a HV-G638A and a CV-G638A.
- 3. Miscellaneous equipment with significant instrumentation will be identified via the instrumentation standard identified in Section 7.1.

Examples:

BVA-K302B	An automatic balancing valve in the K area.
CV-G201A	A check valve in the G area, associated with pump P-G201.
CV-M645B	A check valve in the M area.
STR-R102A	A strainer in the R area.
SL-K151A	A stop log in the K area.

5.2.5 Miscellaneous Ducting Equipment Identifier Format

Miscellaneous duct equipment, which includes the following:

- Balancing Dampers (Manual and Automatic),
- Back-draft Dampers,
- Fire Dampers, and
- Smoke Dampers

are to be identified as follows:

FFFF	-	EEE	-	Α	NN(N)(N)	S
Facility Code (Optional)	-	Equipment Functional Designation	-	Area Code	Equipment Number	Suffix

Where,

FFFF	is the <i>Facility Code</i> , from Appendix A. The <i>Facility Code</i> will typically be implied, and would only be fully written where required.
EEE	is the <i>Equipment Functional Designation</i> , which is comprised of 2 to 4 characters from Section 4.2.
А	is the Area Code, which is based on Section 2.3.
NN(N)(N)	is the Equipment Number of the associated equipment.
S	is the Suffix, a single letter to designate the specific valve.

Notes:

- 1. The Equipment Number will typically be the nearest associated equipment. In some cases, Equipment Numbers may be designated for allocation of miscellaneous ducting equipment.
- 2. Balancing dampers, backdraft dampers, and fire dampers may utilize common equipment numbers and suffixes. For example, it is acceptable to have a BD-G638A and a BDD-G638A.
- 3. Where balancing dampers are integrated with the grille / diffuser, identify as the grille / diffuser (i.e. GRD-M645-1).
- 4. Miscellaneous ducting equipment with significant instrumentation will be identified via the instrumentation standard identified in Section 7.1.

Ĩ	Identification Standard	Revision:	04	Page	48 of 112
Winnipeg		Document Code:			

Examples:

BD-K602B	The second balancing damper in the K area associated with AHU-K602.
BDD-G601A	A back-draft damper in the G area, associated with air handling unit AHU-G601.
FD-M645B	The second fire damper in the M area associated with AHU-M645.
SD-M645D	The fourth smoke damper in the M area associated with AHU-M645.


5.2.6 Cathodic Protection Components

The identification of cathodic protection system elements is to be developed at a later date.

Ĩ	Identification Standard	Revision:	04	Page	49 of 112
Winnipeg		Document Code:			

5.2.7 Sample P&ID

See Figure 5-2 for a sample P&ID segment depicting the identification of manual valves, check valves, and strainers.

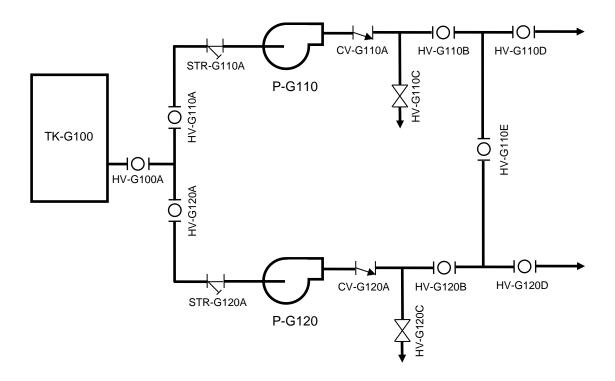

Note: All devices above have an implied facility code prefix of 0102- (or similar).

Figure 5-2 : Sample P&ID – Manual Valve, Strainer, and Check Valve Indication

Ĩ	Identification Standard	Revision:	04	Page	50 of 112
Winnipèg		Document Code:			

This page is intentionally blank.



6 ELECTRICAL

6.1 Equipment Identifier Format

The identification format for electrical equipment is as follows.

FFFF	-	EEEE	-	Α	NN(N)(N)	Т	-	S
Facility Code (Optional)	-	Equipment Functional Designation	-	Area Code	Equipment Number	Type Modifier (Optional)	-	Suffix (Optional)

Where,

FFFF	is the <i>Facility Code</i> , from Appendix A. The <i>Facility Code</i> will typically be implied, and would only be fully written where required.
EEEE	is the <i>Equipment Functional Designation</i> , which is comprised of 2 to 4 characters from Section 6.2.
А	is the Area Code, which is based on Section 2.3.
NN(N)(N)	is the <i>Equipment Number</i> . Select numbers consistent with the ranges in Appendix D.
т	is the Type Modifier, an optional field that is utilized to designate essential or UPS powered equipment. See Section 6.3.
S	is the Suffix, an optional numeric or letter code to distinguish between multiple pieces of equipment with a common equipment number. Generally, numbers are utilized for equipment in series, and letters for equipment in parallel.

0101-MCC-M7210	A MCC located in the M area of the NEWPCC facility.
DS-G510	A disconnect switch for pump P-G510.
CB-M023-B	The second (alternate) breaker feeding PNL-M023.
PNL-S025E	Essential power panelboard located in the S area.
XFMR-H711	Transformer within a regional water pumping station.
MCC-L71	MCC within a wastewater lift station (Note the two digit equipment number)

6.2 Electrical Functional Designations

Table 6-1 : Electrical Equipment Functional Designations

Functional Designation	Description	Notes
ATS	Automatic Transfer Switch	
BAT	Battery	
BC	Battery Charger	
BUS	Busway	
С	Cable (Power)	
САР	Capacitor	Typically individual unit. See PFC.
СВ	Circuit Breaker	Includes air, vacuum, SF6, and moulded case circuit breakers
CBUS	Cable Bus	
CON	Contactor	
СР	Control Panel	Includes miscellaneous electrical control panels, such as a heat trace control panel.
CPR	Cathodic Protection Rectifier	
CSTE	Customer Service Termination Equipment	
DP	Distribution Panel	Typically 600V panel, for distributing power to other points of the electrical distribution system.
DS	Disconnect Switch (non-fusible)	
EDP	Electrical Device Panel	Use for metering panels, protection panels and other miscellaneous electrical panels.
ELB	Emergency Lighting Battery Pack	May have integrated lights.
FAAP	Fire Alarm Annunciator Panel	
FACP	Fire Alarm Control Panel	
FAS	Fire Alarm System	
FDS	Fusible Disconnect Switch	
FU	Fuse	
GEN	Generator	
НСС	Heater Coil Controller	Includes SCR and contactor based controllers.
HF	Harmonic Filter	
INV	Inverter	
JB	Junction Box	





Functional Designation	Description	Notes
К	Interlocking Key (Kirk Key)	See Section 6.4.5
LC	Lighting Contactor	A lighting control panelboard would be identified as a PNL
LDB	Load Bank	
MCC	Motor Control Centre	
MCP	Motor Circuit Protector	
MCS	Moulded Case Switch	
MMS	Manual Motor Starter	
MS	Motor Starter	
MSP	Motor Starter Panel	
MTR	Motor	
MTS	Manual Transfer Switch	
NGR	Neutral Grounding Resistor	
PB	Pull Box	
PFC	Power Factor Correction Unit	
PM	Power Meter	
PNL	Panelboard	
PS	Power Supply	24VDC power supply
PSP	Power Supply Panel	Panel containing 24VDC power supplies, fire alarm booster power supply.
RCFR	Rectifier	
RCPT	Receptacle	
RCTR	Reactor	Includes VFD line and load reactors.
RLY	Protection Relay	
SCR	Silicon Controlled Rectifier	Utilize RCFR
SGR	Switchgear	
SPL	Splitter	
SS	Soft Starter	
SW	Switch	
TVSS	Transient Voltage Surge Suppressor	
UPS	Uninterruptible Power Supply	
VFD	Variable Frequency Drive	
XFMR	Transformer	

6.3 Type Modifier

Electrical equipment that is deemed critical to the operation of a facility is typically backed up by one or more generators or some form of uninterruptible power supply. Electrical equipment of this nature is to be identified with a type modifier to provide indication that the equipment is critical in nature.

The following type modifiers will be used on electrical equipment based on the type of backup power system it is supplied by:

Type Modifier	Description
E	Essential – Distribution is deemed to be of higher criticality and is typically backed up by a generator, or at minimum has a transfer switch between multiple sources.
U	Uninterruptible – The distribution equipment is powered by a UPS

Notes:

- 1. The Type Modifier is utilized only for essential and uninterruptible power systems.
- 2. The Type Modifier is not to be used on generators or UPS units as these devices are the sources of the backup power supply.



6.4 Device-Specific Identifier Formats

6.4.1 Receptacle Identifiers

Receptacles are not necessarily required to be uniquely identified, but where they are, the receptacle identification is as follows.

RCPT	-	Α	NN(N)(N)	-	KK	S	-	ММ
Receptacle Designation	-	Area Code	Equipment Number of Source Panel	-	Circuit Number	Switched Sub- Circuit (Optional)	-	Incrementing Number (Optional)

Where,

RCPT	is the receptacle designation.
А	is the Area Code, which is based on Section 2.3.
NN(N)(N)	is the Equipment Number of the source panel.
KK	is the <i>Circuit Number</i> of the source panel. Where circuit numbers are not applicable, utilize an incrementing number beginning with 1.
S	is the optional Switched Sub-Circuit utilized to identify cables that are switched.
MM	is an optional <i>Incrementing Number</i> , utilized to indicate the specific receptacle powered by the circuit.

Examples:

RCPT-S022-14-2	A uniquely identified receptacle fed from Circuit 14 of PNL-S022. In this case, it is the 2 nd receptacle on the circuit.
RCPT-M701-1	A uniquely identified receptacle fed from MCC-M701. In this case, it is the only receptacle on the circuit, and as circuit numbers are not typically applied to MCCs, the number 1 is assigned to the circuit number.

The RCPT designation may be implied on plan drawings, as shown in Figure 6-1 below.

M701-1		
\square		



6.4.2 Power Cables Associated with Identified Equipment

The identification format for power cables is as follows.

С	-	Α	NN(N)(N)	-	S
Cable Designation	-	Area Code	Equipment Number of Load	-	Suffix (Optional)

Where,

С	is the Cable Designation. For power cables, the letter C is utilized. For busway, BUS is utilized.
А	is the Area Code, which is based on Section 2.3.
NN(N)(N)	is the Equipment Number of the load equipment.
S	is the <i>Suffix</i> utilized to identify the specific cable associated with the equipment. The Suffix is not required if a single cable is associated with the equipment. Utilize sequential numbers for cables in series, or for different purposes, and letters for cables in parallel. Utilize the letter T to designate tie connections. Where the load equipment identifier has a suffix in the identifier, set the suffix of the cable to be the suffix of the load identifier plus an additional digit (See receptacle example below)

Notes:

- 1. In the event the cable does not serve a specific load, such as a tie cable between two MCCs, select one of the two units of equipment as the prime equipment number for the cable.
- 2. See Section 7.3 for automation cable identification.

C-G683-1	The feeder for a motor disconnect, DS-G683.
C-G683-2	The motor cable feeding exhaust fan EF-G683, and fed from disconnect switch DS-G683.
C-M002	The feeder for MCC-M002
C-M003-A	The normal power feeder to ATS-M003.
C-M003-B	The emergency power feeder to ATS-M003.
C-M001-T	A cable used as a tie between MCC-M001 and DP-M002.
C-L01	Cable feeding Lift Pump P-L01 in a wastewater lift station.
C-M710-21	The cable feeding receptacle RCPT-M710-2.

6.4.3 General Purpose Cables – Lighting & Receptacles

The identification format for general purpose cables, for single phase loads, is as follows.

C	-	Р	NN(N)(N)	-	KK	S
Cable Designation	-	Area Code	Equipment Number of Source Panel	-	Circuit Number	Switched Sub-Circuit (Optional)

Where,

С	is the Cable Designation.
А	is the Area Code, which is based on Section 2.3.
NN(N)(N)	is the Equipment Number of the source panel.
KK	is the Circuit Number of the source panel
S	is the optional <i>Switched Sub-Circuit</i> utilized to identify cables that are switched.

Note:

1. It is expected that three-phase loads will all have equipment numbers assigned.

C-S022-14	Circuit 14 of PNL-S022.
C-S022-14A	Switched sub-circuit of circuit 14, fed from PNL-S022.

6.4.4 Junction Boxes - Power

The identification format for power junction boxes is as follows.

[JB	-	Α	NN(N)(N)	Т	-	S
	Junction Box Designation	-	Area Code	Equipment Number	Circuit Number	-	Suffix (Optional)

Where,

JB	is the Junction Box designation.
А	is the Area Code, which is based on Section 2.3.
NN(N)(N)	is the <i>Equipment Number</i> of the load equipment. If not associated with a specific piece of equipment, use a unique <i>Equipment Number</i> in the electrical equipment range, not associated with other equipment, in accordance with the <i>Equipment Number</i> ranges in Appendix D.
Т	is the Type Modifier, optional to electrical equipment as per Section 6.3.
S	is the <i>Suffix</i> utilized to identify multiple junction boxes associated with an equipment number.

JB-U421	Junction box associated with pump P-U421.
JB-C001	Junction box associated with MCC-C001.
JB-R600	Junction Box associated with numerous pieces of equipment, within a wastewater treatment facility.
JB-M751	Junction Box associated with numerous pieces of equipment, within a regional water pumping station.



6.4.5 Interlock Keys

The identification format for interlock (Kirk) keys is as follows.

К	NNNN
Interlocking Key Designation	Number

Where,

K is the Interlocking Key designation.

NNNN is the *Key Interchange Number*, which is unique for each facility. The *Key Interchange Number* can be from 1 to 4 digits long. For larger facilities, a drawing should be created with an index of Key Interchange Numbers for reference.

Note:

- 1. The interlock key identifier will be the same for all interlocks associated with the system. Thus, for a system with four breakers interlocked with four locks and three keys, all four interlocks and keys have the same identifier.
- 2. Area Codes are not utilized as key interlocks could span over multiple areas.

K1	First key interlock system for a facility.
K52	52 nd key interlock system associated with a facility.



6.4.6 Wire Tags

6.4.6.1 Lighting and Receptacle Circuits - AC

The identification format for lighting and receptacle circuits is as follows.

	Α	NN(N)(N)	-	CC	S
ſ	Area Code	Equipment Number of Source	-	Circuit Number or Neutral Designation	Switched Sub-Circuit (Optional)

Where,

А	is the Area Code, which is based on Section 2.3.
NN(N)(N)	is the Equipment Number of the source panelboard.
CC	is the Circuit Number of the source panelboard, or N for a neutral wire.
S	is the <i>Switched Sub-Circuit Designation</i> , and is an incrementing letter for a conductor that is switched.

Note: The Equipment Functional Designation, typically PNL, is implied to reduce the length of the wire tags.

G701-32	Line (Hot) conductor of circuit 32, associated with PNL-G701.
W752-N	Neutral conductor associated with PNL-W752.
S702-12B	The second switched sub-circuit line (hot) conductor, associated with PNL-S702 circuit 12.

)	Identification Standard	Revision:	04	Page	61 of 112
Winnipèg		Document Code	:		

6.4.6.2 DC Power Circuits

DC power circuits, such as from large switchgear DC power supply units require unique identification as follows:

Ρ	NN(N)(N)	-	С	S	D
Area Code	Equipment Number of Source	-	Circuit Number	Switched Sub-Circuit (Optional)	Power Designation

Where,

A	is the Area Code, which is based on Section 2.3.
NN(N)(N)	is the Equipment Number of the source panelboard.
С	is the Circuit Number of the source panelboard.
S	is the <i>Switched Sub-Circuit Designation</i> , and is an incrementing letter for a conductor that is switched.
D	is the <i>Power Designation</i> , which is based on Table 6-2.

Note: The Equipment Functional Designation, typically PNL, is implied to reduce the length of the wire tags.

Table 6-2 : DC Power Circuit Wire Tag Power Designations

Power Designation	Description
С	DC Common (0V)
G	Ground
+	DC Positive
-	DC Negative

Note: The Ground designation is not typically required, provided that the ground wire is green. Examples:

- G751-22+ Positive wire of circuit 22, fed from PNL-G751.
- G751-22- Negative wire of circuit 22, fed from PNL-G751.
- G751-22A+ Positive wire of switched circuit 22, fed from PNL-G751.

6.4.6.3 Three Phase Power Wiring

The identification format for three phase power wire tags is as follows.

Α	NN(N)(N)	-	Х	Н
Area Code	Equipment	-	•	Phase
	Number		Number	
			(Optional)	

Where,

А	is the Area Code, which is based on Section 2.3.
NN(N)(N)	is the <i>Equipment Number</i> of the load equipment. If not associated with a specific piece of equipment, use of <i>Equipment Number</i> in the electrical range is preferred, in accordance with the <i>Equipment Number</i> ranges in Appendix D.
Х	is an optional <i>Sequence Number</i> that is typically a numeric character, utilized when there are multiple power cables associated with an <i>Equipment Number</i> .
Н	is the Phase, and should be labelled A, B, C, or N.

Three phase power wiring wire tagging is required, except where the conductors are color coding, are in a dedicated cable or conduit, and the routing is obvious.

G681-A	Phase A conductor of a power cable associated with EF-G681. The wire is in common conduit with other power cables.
W1511-2B	Phase B conductor of the second power circuit associated with centrifuge CE-W1511 at the NEWPCC facility.
-	No wire tags are needed for the conductors of a pump, fed via a Teck power cable, where the conductors are color coded and the overall cable is identified and labelled.

)©	Identification Standard	Revision:	04	Page	63 of 112
Winnipèg	Identification Standard	Document Code:			

6.4.6.4 Motor Control Circuits

The identification format for motor control circuits is as follows:

Α	NN(N)(N)	-	www	S
Area Code (Optional)	Equipment Number (Optional)	-	Wire Number	Suffix (Optional)

Where,

A	is the <i>Area Code</i> , which is based on Section 2.3. It is not required for wires exclusively within the motor starter.
NN(N)(N)	is the <i>Equipment Number</i> of the associated equipment. It is not required for wires exclusively within the motor starter.
WWW	is the Wire Number, an incrementing number.
S	is an optional <i>Suffix</i> , and is utilized where it is desired to utilize the same wire number, but the signal has changed.

Notes:

- 1. It is desirable, but not mandatory, that the wire number in a motor starter match the terminal number.
- 2. It is deemed acceptable to omit the Area Code and Equipment Number for wires exclusively within the motor starter, as it is common industry practice, and MCC manufacturers only typically provide numeric wire numbers.

8	Control wire 8 located in the motor starter for AHU-G652, and lands on terminal 8 in the motor starter.
8A	Control wire 8A located in the motor starter for AHU-G652, which does not land on a terminal strip.
G652-8	Control wire 8, located in external field wiring, associated with AHU-G652.

6.5 Subcomponents

The following designations are to be utilized for electrical equipment subcomponents. See Section 2.6 for general rules on application of subcomponents. Note that numerous equipment functional designations, shown in Table 6-1, can also be utilized as subcomponent designations, as shown in Table 6-3 below.

Table 6-3 : Electrical Equipment Subcomponents
--

Subcomponent Designation	Description	Notes
AM	Ammeter	
В	Bus	
CAP	Capacitor	
СВ	Circuit Breaker	
CON	Contactor	
СРТ	Control Power Transformer	
CR	Control Relay	
СТ	Current Transformer	Phase identification may be utilized as part of the subcomponent identifier. i.e. CT-1A, CT-1B
DS	Disconnect Switch	
F	Fan	
FDS	Fused Disconnect Switch	
FU	Fuse	
М	Motor Contactor	
MCB	Main Circuit Breaker	
MCP	Motor Circuit Protector	
MCS	Moulded Case Switch	
MMC	Motor Management Controller	Also known as intelligent overload.
OL	Overload Relay	
РМ	Power Meter	
PS	Power Supply	
PT	Potential Transformer	Phase identification may be utilized as part of the subcomponent identifier. i.e. PT-1A, PT-1B
RCFR	Rectifier	
RCTR	Reactor	
RLY	Protection Relay	Utilize IEEE Number for suffix if appropriate.
SCR	Silicone Controlled Rectifier	Utilize RCFR
TVSS	Transient Voltage Surge Suppressor	
VM	Voltmeter	



Ĩ	Identification Standard	Revision:	04	Page	65 of 112
Winnipeg		Document Code:			

Notes:

1. A motor starter is not typically deemed to be a subcomponent.

Subcomponent Examples: MS-G261.CAP	A capacitor that is an internal component of MS-G261. If the capacitor were a separate component mounted externally, it would be identified as CAP-G261.
MCC-P011.MCB	Integrated Main Circuit Breaker for Motor Control Centre MCC-P011
MCC-P011.TVSS.CB	Circuit Breaker for Motor Control Centre MCC-P011 TVSS

A sample single line diagram with subcomponents is shown in Figure 6-2. Note that the full identifier is not written out, provided that the parent identifier is clear from the drawing context.

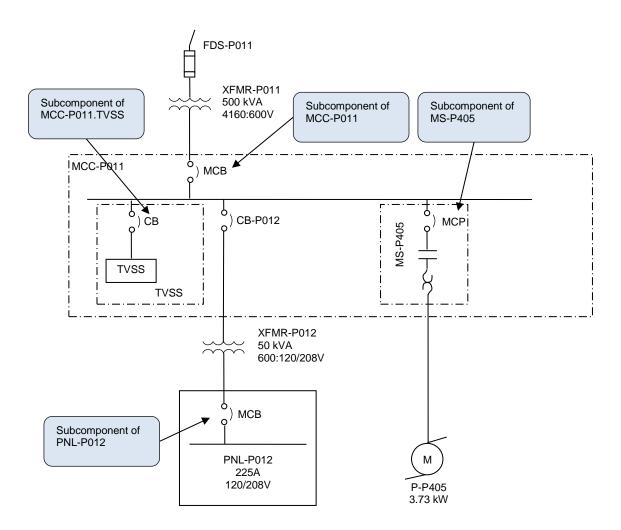


Figure 6-2 : Subcomponents – Electrical Equipment

6.5.1 Tie Circuit Breakers

Tie breakers are used to connect electrical buses together. Tie breakers are considered to be subcomponents of the switchgear / panel that they are located in. The identification format for tie circuit breakers is in accordance with Section 2.6, except that the letter T is used instead of a number for the component number.

Examples:

SGR-U701.CB-T	A tie breaker between SGR-U701 and SGR-U002
SGR-P711.CB-T	A tie breaker between SGR-P711 and SGR-P712

illustrates a sample electrical single line diagram with tie breakers.

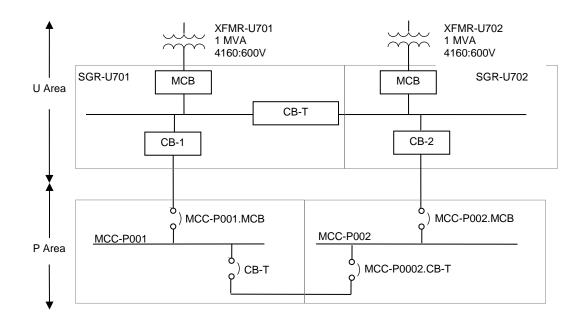


Figure 6-3 : Sample Tie Breaker Identification

Note:

1. All breakers in Figure 6-3, whether specifically shown or not, are subcomponents.



6.6 Examples

6.6.1 Example 1

An example single line diagram is shown in Figure 6-4.

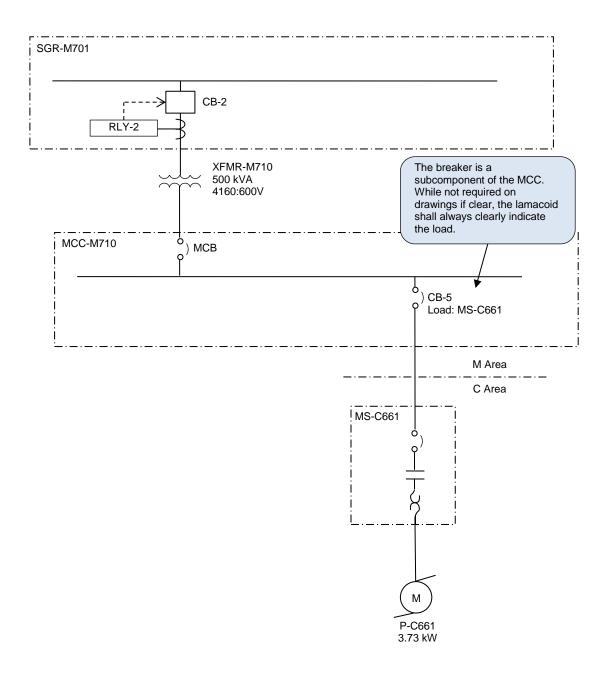


Figure 6-4 : Example Identification by Load Equipment

6.7.1 Identifier Format

The identification of all fire alarm system components is based upon room numbers rather than equipment numbers. This allows for more rapid recognition of the component location, and avoids utilization of a significant portion of the equipment numbering range for fire alarm system components.

FFFF	-	FAS	-	Α	-	L	RR	-	D	NN
Facility Code	Alarm	-	Area Code	-	Level	Room Number	-	Device Designation	Device Number	
(Optional)		Design- ation		From Room Number Designation						

Where,

FFFF	is the <i>Facility Code</i> , from Appendix A. The <i>Facility Code</i> will typically be implied, and would only be fully written where required.
FAS	is the Fire Alarm Designation, which is comprised of the letters FAS.
А	is the Area Code, which is based on Section 2.3.
L	is the <i>Level</i> , which shall typically be one or two characters, as described in Section 3.1.
RR	is the Room Number, which shall be assigned as described in Section 3.1.
D	is the Device Designation, which is comprised of a single letter from Section 6.7.2
NN	is the <i>Device Number</i> , which uniquely identifies a specific device within a room.

FAS-S-115-D01	The first smoke detector in room 15 on the main level of the Secondary Clarifier area.
FAS-M-222-A02	The second horn/strobe in room 22 on the second floor of the M area.



6.7.2 Fire Alarm Device Designations

Table 6-4 : Fire Alarm Device Designations

Device Designation	Description
А	Annunciation Device (Horn / Strobe)
С	Control Relay Module
D	Detection Device (Heat / Smoke)
E	End-of-line Device
1	Isolation Module
М	Addressable Monitor / Input Module
Р	Pullstation
R	Automatic Door Release Device
S	Signal Module

6.7.3 Drawing Format

The format of fire alarm system devices on drawings will typically be as shown in Figure 6-5 below. Note a significant portion of the device identifier is determined via context. Where the context is not clear, use full device identifiers.

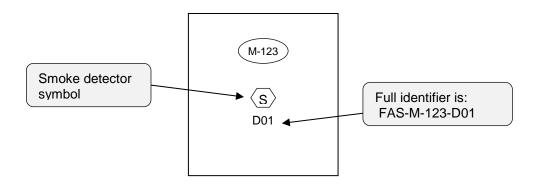


Figure 6-5 : Room Numbering on Drawings – Plan View



6.7.4 Wire Tags

The identification format for fire alarm circuits is as follows.

Α	NN(N)(N)	-	ттт	-	CC
Area Code	Equipment Number of Source Panel	-	Type of Circuit	-	Circuit Number

Where,

А	is the <i>Area Code</i> of the source panel or equipment. Typically, this will be the fire alarm control panel, but it could also be a booster power supply.						
NN(N)(N)	is the Equipment Number of the source panel or equipment.						
TTT	is the Type of Circuit, selected as follows:						
	DLC Data Communication Link						
	IDC Initiating Device Circuit						
	NAC Notification Appliance Circuit						
CC	is the Circuit Number, an incrementing number.						

P901-NAC-01	Notification appliance circuit 01 out of FACP-P901.
R921-NAC-02	Notification appliance circuit 02 out of BPS-R921.
P901-DLC-03	Digital Communication Link circuit 03 out of FACP-P901.

6.8 Security Devices

The identification of security system components is dependent upon the system that the device is connected to. If the security device is connected to a dedicated security system, it shall be identified as per this section. However, devices directly connected to the process control system (i.e. PLC) shall be identified as per Section 7.1.

6.8.1 Device Identifier Format

The security device identifier format is based upon room numbers rather than equipment numbers. This allows for more rapid recognition of the component location, and avoids utilization of a significant portion of the equipment numbering range for security system components.

FFFF	-	SCY	-	Α	-	L	RR	S	-	DD	Ν
Code D	Security Design-	1	Area Code	-	Level	Room Num	Suffix (Opt)	-	Device Design	Device Number	
(Optional)		ation		From F Design		n Numbe n	ər			-ation	

Where,

FFFF	is the <i>Facility Code</i> , from Appendix A. The <i>Facility Code</i> will typically be implied, and would only be fully written where required.
SCY	is the Security Designation, which is comprised of the letters SCY.
А	is the Area Code, which is based on Section 2.3.
L	is the <i>Level</i> , which shall typically be one or two characters, as described in Section 3.1. For outdoor locations, it is recommended that the EX designation be utilized, as described in Section 3.1.
RR	is the Room Number, which shall be assigned as described in Section 3.1.
S	is the Suffix (optional), which corresponds to the Door Identifier for security devices associated with doors
DD	is the Device Designation, which is comprised of two letters from Section 6.8.2.
Ν	is the <i>Device Number</i> , which uniquely identifies a specific device within a room.

SCY-S-115B-DC1	The first door switch in on door B of room 15 on the main level of the Secondary Clarifier area.
SCY-M-222-AH2	The second horn/strobe in room 22 on the second floor of the M area.
SCY-S-115A-CR1	The access card reader outside the door (A) to room 15 on the main level of the Secondary Clarifier area.
SCY-A-EX1-VC1	An outdoor video camera in the A area, exterior zone 1.



6.8.2 Security Device Designations

The security device designations are independent of the Process / Mechanical / Electrical / Automation designations, and may overlap those designations.

Device Designation	Description	Type Modifiers (See Note 2)
АН	Annunciation Device (Horn / Strobe)	H Horn S Strobe
CR	Access Card Reader (See Note 1)	
DC	Door Contact	
EL	End-of-line Device	
ES	Electric Strike (Subcomponent of Door)	
EX	Exit Button	Includes "Request to Exit" and crash bars.
GB	Glass-Break Contact	
IM	Addressable Monitor / Input Module	
IS	Isolation Module	
KP	Keypad	
MD	Motion Detector	
РВ	Panic Button	
VC	Camera	FMFlush MountPTZPan/Tilt/ZoomSMSurface Mount

Table 6-5 : Security Device Designations – Room/Door Specific

Note:

- 1. Access Card Readers will be designated by the door identifier.
- 2. Show the type modifier next to the device as applicable.

6.8.3 Security Equipment Designations

Some security equipment is preferably identified as major equipment, and not associated with a specific room. The Security equipment designations are shown in Table 6-6.

Table 6-6 : Security Equipment Designations

Equipment Designation	Description
ACP	Access Control Panel
SCP	Security / Intrusion Alarm Control Panel
SVM	Security Video Monitor
SVR	Security Video Recorder

Note:

1. The above equipment will be identified in a manner consistent with Section 6.1.

6.8.4 Equipment Subcomponent Designations

Table 6-7 : Security Equipment Subcomponent Designations

Equipment Subcomponent Designation	Description
MOD	Input / Output Module
PS	Power Supply
PU	Processing Unit

Note:

1. The above equipment will be identified in a manner consistent with Section 6.5.



6.8.5 Wire Tags

The identification format for security circuits is as follows.

Α	NN(N)(N)	-	ттт	-	CC
Area Code	Equipment Number of Source Panel	-	Type of Circuit	-	Circuit Number

Where,

А	is the <i>Area Code</i> of the source panel or equipment. Typically, this will be the fire alarm control panel, but it could also be a booster power supply.		
NN(N)(N)	is the Equipment Number of the source panel or equipment.		
ТТТ	is the Type of Circuit, selected as follows:		
	DLC Data Communication Link		
	IDC Initiating Device Circuit		
	NAC Notification Appliance Circuit		
CC	is the Circuit Number, an incrementing number.		

Note:

1. The Type of Circuit requires review. The Designer may propose alternate types to the City for review and approval.

Examples:

P951-NAC-01	Notification appliance circuit 01 out of SCP-P901.	

P951-DLC-03 Digital Communication Link circuit 03 out of SCP-P901.



7 AUTOMATION

7.1 Instrumentation

7.1.1 Instrument Identifier Format

The identification format for instrumentation is as follows.

FFFF	-	XXXX	•	Α	NN(N)(N)	Т	-	S
Facility Code	-	Instrument Functional	-	Area Code	Equipment Number	Instrument Number	-	Suffix
(Optional)		Designation			Loop Numb	er		

Where,


	FFFF	is the <i>Facility Code</i> , from Appendix A. The <i>Facility Code</i> will typically be implied, and would only be fully written where required.
	XXXX	is the <i>Instrument Functional Designation</i> , which is typically comprised of 2 to 4 characters from Section 7.1.3. Note that five character <i>Instrument Functional Designations</i> are possible, but should be quite rare.
	А	is the Area Code, which is based on Section 2.3.
	NN(N)(N)	is the <i>Equipment Number</i> of the associated equipment. If no equipment is associated, allocate <i>Equipment Numbers</i> specific for the applicable instrumentation. Do not suppress 0's for equipment numbers, as all loop numbers at a site should have the same number of digits in the loop number.
	Т	is the <i>Instrument Number</i> , where the number increments from the number 0 through 9. Utilize the number 0 for instruments directly associated with motor starters and control. The <i>Instrument Number</i> does not increment for every instrument, but rather increments for every instrument loop.
	NN(N)(N)T	is the Loop Number, comprised of the <i>Equipment Number</i> together with the <i>Instrument Number</i> . Medium to large facilities will utilize four digit loop numbers, while smaller facilities such as wastewater collections facilities will use three digit loop numbers. The NEWPCC facility will utilize five digit loop numbers
	S	is the <i>Suffix</i> , which is used in the cases of multiple instruments on the same or redundant loops. All suffixes are to be numeric.
Exampl	les:	
	XY-G2501	A solenoid for the valve XV-G250, where the solenoid is remote from the valve.
	LT-M1011-2	Redundant Wet Well level transmitter.

- 0650-PT-M3011 A pressure transmitter associated with pump M301 at the Hurst Pumping Station. Note that the facility code is optional.
- HSR-R1100 A start pushbutton associated with pump P-R110.

٢		Identification Standard	Revision:	04	Page	76 of 112	
Winnipeg		Identification Standard		Document Code:			
TY-B1500			A temperature relay that takes signals from TT-B1501, TT-B1502, TT-B1503, and TT-B1504 and converts to a Modbus protocol.				
FV-R12311		A flow valve at the NEWPCC	A flow valve at the NEWPCC facility, with five digit loop numbers.				
ZSS-F3212		A safety switch for CNV-F321	A safety switch for CNV-F321.				
HS-L010		A start pushbutton for P-L01 a	A start pushbutton for P-L01 at a wastewater lift station.				
PG-S1102		A pressure gauge for pump P	A pressure gauge for pump P-S110.				

7.1.2 Drawing Format

The format for instrumentation on drawings, such as P&IDs, is shown below:



7.1.3 Instrument Functional Designations

An instrument functional designation represents the function of the instrument, and is based upon ISA 5.1. Note that it is possible for an instrument functional designation to be common with a mechanical equipment functional designation, as they will be differentiated by the identifier format. Instrument identifiers will have a four digit loop number, compared with mechanical equipment, which has a three digit equipment number. Thus, even without context, it is possible to differentiate between instruments and other equipment.

Due to the many types of instruments available, a comprehensive list of instrument identifiers is not provided, but rather instrument identifiers are derived from Table 7-1 in a manner that is consistent with ISA 5.1. An instrument functional designation is selected as follows:

- Select the first character from the first column of Table 7-1, based upon the measured or initiating variable of the loop. Optionally, select a second character from the second Modifier column, to indicate a special function associated with the measured or initiating variable. For example, an instrument ultimately part of a safety loop associated with level would have the first two characters designated as LS.
- Select the next character (second or third, depending on whether a second column Modifier is utilized), from either the third or fourth columns. The third column is for Readout or Passive Functions, while the fourth column is for Output Functions.
- Finally, if appropriate, append a letter from the fifth Modifier column, to clarify the function of the instrument. In some cases two characters may be selected from the fifth Modifier column.

A list of common instrument functional designations is provided in Table 7-2.



78 of 112

Table 7-1 : Instrument Functional Designations

	First Letter		Succeeding Letter	S	
	Measured or Initiating Variable	Modifier	Readout or Passive Function	Output Function	Modifier
А	Analysis		Alarm		
В	Burner, Combustion				
С	Conductivity (1)			Control (2)	Close
D	Density (3)	Difference, Differential			Deviation
Ш	Voltage		Sensor, Primary Element		
F	Flow, Flow Rate	Ratio			Failure / Fault (14)
G			Glass, Gauge Viewing Device (4)		
Н	Hand (Manual)				High (15)
-	Current		Indicate (5)		
J	Power		Scan		
к	Time, Schedule	Time Rate of Change		Control Station	
L	Level		Light (6)		Low (16)
М	Moisture, Humidity (7)				Middle, Intermediate
Ν					
0	Torque		Orifice, Restriction		Open
Ρ	Pressure		Point (Test Connection)		
Q	Quantity	Integrate, Totalize	Integrate, Totalize		
R	Radiation		Record		Run (8)
S	Speed, Frequency	Safety (9)		Switch	Stop (10)
Т	Temperature			Transmitter	
U	Multivariable		Multifunction	Multifunction	
V	Vibration, Mechanical Analysis			Valve, Damper, Louver	
W	Weight, Force		Well, Probe		
Х	Unclassified (11)	X Axis	Unclassified	Unclassified	Unclassified
Y	Event, State, or Presence	Y Axis		Auxiliary Device (12)	
Z	Position, Dimension	Z Axis, Safety Instrumented System (13)		Driver, Actuator, Unclassified Final Control Element	

Notes for Instrument Functional Designations:

- 1. The use of the letter C for conductivity is a City specific user assignment.
- 2. Utilize the output designation C for an automatic device or function that receives an input signal and generates a variable output signal that is used to modulate or switch a valve or otherwise control a final drive element. Do not utilize the C designation for a control valve, unless the valve independently measures the process variable and determines the appropriate valve position. Thus, the use of TCV, FCV, or LCV is not common. The use of PCV is more common, for pressure regulators. In addition, do not use the C controller designation for switches that directly control a device or equipment. For example, a unit heater on/off thermostat would be a TS, not a TC.
- 3. The use of the letter D for density is a City specific user assignment.
- 4. Utilize the letter G for all pressure gauges (i.e. PG), thermometers (i.e. TG), and viewing glasses (e.g. LG).
- 5. The Readout/Passive Function letter I is to be utilized for analog or digital readouts of a measurement or input signal. Do not utilize for indication of discrete on/off signals.
- 6. The Readout/Passive Function letter L is to be utilized for indication of discrete on/off states. Do not utilize for alarms, which should utilize the A designation.
- 7. It is recommended to utilize the initial letter M as a designation for moisture, which is common industry practice. The City has historically applied the letter M for Motor, however this use is not consistent with ISA 5.1 and it is recommended that this use be discontinued.
- 8. Utilize the modifier R to designate a Run or Start modifier. Note that this designation was added in the 2009 revision to ISA-5.1.
- 9. Utilize the letter S as a modifier for safety components not part of a Safety Instrumented System (SIS). The letter S modifier is to be utilized for self-actuated emergency protective primary and final control elements only when used in conjunction with Measured/Initiating Variables flow [F], pressure [P] or temperature [T]. An example is a PSV for a pressure safety relief valve utilized to protect against emergency conditions that are not expected to normally occur.
- 10. Utilize the modifier S to designate a Stop modifier. Note that this designation was added in the 2009 revision to ISA-5.1.
- 11. The letter X is to be defined at the time of use, and may be used for multiple definitions where no other letter is applicable. The letter X is commonly applied to controlled on-off valves, where the initiating variable is not clearly defined.
- 12. The use of output function Y is to be utilized for a device that connects, disconnects, transfers, computes, and/or converts air, electronic, electric, or hydraulic signals or circuits. Use for a current to pressure signal converter would be appropriate.
- 13. Variable modifier Z is to be utilized for all components of a safety instrumented system (SIS). An example is a SIS system pressure transmitter, designated PZT.
- 14. The use of the letter F as a Modifier to represent Failure or Fault is an extension to ISA-5.1.
- 15. Where more than one switch or alarm within the same control loop is designated with a High designation, the second switch or alarm (at a higher level) shall be designated with a High-High designation. An instrument shall not be designated with a High-High designation unless there is an instrument with a High designation already present. For example: A LSH is a first level switch at a high level and a LSHH would be a second level switch at a higher level. Either switch may have associated alarms or interlocks.
- 16. Where more than one switch or alarm within the same control loop is designated with a Low designation, the second switch or alarm (at a lower level) shall be designated with a Low-Low designation. An instrument shall not be designated with a Low-Low designation unless there is an instrument with a Low designation already present. For example: A LSL is a first level



switch at a low level and a LSLL would be a second level switch at a lower level. Either switch may have associated alarms or interlocks.

Designation	Direct Translation	Example
AA	Analysis Alarm	Gas detection horn / strobe
ААН	Analysis High Alarm	H_2S gas detection high level alarm
AT	Analysis Transmitter	H ₂ S gas detection transmitter
DT	Density Transmitter	Density transmitter without local indication
EG	Voltage Viewing Device	Capacitive voltage indicator
EL	Voltage Light	Pilot light indicating voltage is present
EI	Voltage Indicator	Voltage meter with numeric scale, or digital meter
ES	Voltage Switch	General voltage relay
ESL	Voltage Switch - Low	Undervoltage relay
ET	Voltage Transmitter	Voltage transducer
FAL	Flow Alarm - Low	Pilot light indicating low flow
FCV	Flow Control Valve	Integrated valve to limit the flow below a setpoint. The valve is not externally controlled.
FE	Flow Element	Magnetic flowtube, orifice plate
FIT	Flow Indicating Transmitter	Magnetic flowmeter transmitter with local indication
FT	Flow Transmitter	Magnetic flowmeter transmitter without local indication
FV	Flow Valve	Butterfly valve with positioner, modulated by a signal initiated by a flowmeter.
HS	Hand Switch	Hand/Off/Remote switch
HSR	Hand Switch – Start/Run	Start pushbutton
HSS	Hand Switch - Stop	Stop pushbutton, including emergency stop pushbuttons, unless associated with a Safety Instrumented System.
JIT	Power Indicating Transmitter	Power meter
KS	Time Switch	Timing relay
LSH	Level Switch - High	Sump pit high level switch
LSL	Level Switch - Low	Sump pit low level switch
LE	Level Sensor	Ultrasonic level transducer
LIT	Level Indicating Transmitter	Ultrasonic level transmitter with local indication
LT	Level Transmitter	Ultrasonic level transmitter without local indication

Table 7-2 : Common Instrument Functional Designations

Designation	Direct Translation	Example
ME	Moisture Sensor	Moisture sensor. Includes submersible pump/mixer leakage detector.
OSH	Torque Switch - High	Torque limit switch
PG	Pressure Gauge	Mechanical pressure gauge local to piping
PI	Pressure Indicator	Pressure display remote from piping, with scale.
PSL	Pressure Switch - Low	Low pressure switch on air receiving tank
PSH	Pressure Switch - High	High pressure switch on air receiving tank
PT	Pressure Transmitter	Analog pressure transmitter
ST	Speed Transmitter	Speed pulse encoder
TE	Temperature Element	Thermocouple or RTD temperature sensor
TG	Temperature Gauge	Local temperature gauge
TSH	Temperature Switch - High	High temperature switch
ті	Temperature Indicator	Digital temperature indicator or local analog indicator based upon a capillary tube
TSL	Temperature Switch - Low	Low temperature switch. The switch may be associated with process control, interlock, alarm or any combination thereof.
TSLL	Temperature Switch – Low-Low	A second low temperature switch that has a setpoint lower than the first low temperature switch. The switch may be associated with process control, interlock, alarm or any combination thereof.
ТТ	Temperature Transmitter	Analog temperature transmitter
VE	Vibration Sensor	Vibration sensor
VIT	Vibration Indicating Transmitter	Vibration transmitter with local indication
XV	Unclassified Valve	Typically use for on/off valves
YS	Presence Detector	Use for motion detectors that are connected to the process control system and not to a security system. Use Section 6.8 for security systems.
ZSC	Position - Closed	Valve closed limit switch
ZSO	Position - Open	Valve opened limit switch



7.1.4 Loop Numbers

The equipment number (2-4 as applicable) digits of a loop number shall be identical to the equipment with which the instrument is associated.

Motor controls of motorized equipment should have an *Instrument Number* of 0. For example, a local start/stop switch for pump P-S305 should be designated as HS-S3050 or with a suffix such as HS-S3050-2. Nothing precludes the use of a 0 *Instrument Number* for instruments not associated with motorized equipment.

The *Loop Number* should generally be unique for each instrument loop. For example, outdoor air, mixed air, and supply air temperature transmitters on an air handling unit should all have different loop numbers as they are measuring different temperatures.

Exceptions will only be permitted where:

- The two instrument loops are performing the identical function. For example, two thermal dispersion flowmeters measuring the same point and being averaged in software should utilize the same loop number with different suffixes.
- No other good alternatives exist. Note that use of a common loop number for multiple loops will require careful attention in wiring and signal tagging.

7.1.5 Type Clarification

The instrument *Type Clarification* is an optional additional field on the outside of the instrument tag bubble, as shown in Section 7.1.2. The *Type Clarification* is not part of the identifier, but rather additional information that is useful to the P&ID reader. The site P&ID legend sheet should contain all type clarifications utilized at the site. Examples are provided in Table 7-3 on the next page, and additional examples are provided in Table 5.2.2 of ISA 5.1.

Functional Identifier	Type Clarification	Description
AIT	СО	Carbon monoxide transmitter
AIT	COMB	Combustible gas transmitter
AIT	H2S	Hydrogen sulphide transmitter
AIT	O2	Oxygen transmitter
FE	COR	Coriollis flow element
FE	MAG	Magnetic flow element
FE	US	Ultrasonic flow element
HS	H/O/A	Hand / Off / Auto Switch
HS	H/O/R	Hand / Off / Remote Switch
HS	O/A	Off / Auto Switch
HS	0/0	Off / On Switch
HS	RST	Reset
HSS	EMG	Emergency Stop Switch
LE	CAP	Capacitance level element
LE/LT	DP	Differential pressure level element
LE	RAD	Radar level element
LE/LT	SDP	Submersible differential pressure
LE	US	Ultrasonic level element
PT	ABS	Absolute pressure transmitter
PT	VAC	Vacuum pressure transmitter
ТТ	ТС	Thermocouple temperature transmitter
ТТ	RTD	Resistance temperature transmitter

Table 7-3 : Type Clarification Examples



7.1.6 Valve Identification

Historically there has been some confusion regarding valve identification, and the purpose of this section is to clarify the appropriate functional identification for valves, as per ISA 5.1.

7.1.6.1 Manual Valves

All manual valves are to be identified as HV, as per Sections 5.2.1, 5.2.2 and 5.2.3.

Valves that have an actuator, but are always operator controlled remotely via a PLC, DCS, or some other control system are to be identified as per Sections 7.1.6.4 and 7.1.6.5.

Instrument isolation valves less than or equal to 12mm do not require identification if there is no requirement to identify them in an operations procedure.

7.1.6.2 Actuated Valves with Internal Controller

A self-actuating valve that has a process signal as an input is a *control valve*, where the initial letter is the measured process variable. Examples are as follows:

- FCV
 Flow Control Valve a valve with an internal mechanism or logic that measures flow and controls it to some setpoint. For example, this could be a Foundation Fieldbus Controlled valve. A valve that has flow as it's initiating variable, but receives a position signal from an external controller is **not** a FCV, but a FV (as per ISA 5.1)
 PCV
 Pressure Control Valve a valve with an internal mechanism or logic that
 - PCV Pressure Control Valve a valve with an internal mechanism or logic that measures pressure and controls it to some setpoint. For example, this could be a Foundation Fieldbus Controlled valve with an integral PID controller. A valve that controls pressure, but receives a position signal from an external controller is **not** a PCV (as per ISA 5.1). Note that while a mechanical pressure regulator is functionally identified as a PCV, it is identified as per 5.2.3.

7.1.6.3 Actuated Valves with External Controller

A valve with an actuator that is positioned by an external signal is a *control valve*, where the initial letter is the measured process variable. Examples are as follows:

FV	Flow Valve – a valve with or without a positioner, that is positioned by an external controller based upon a measured or initiating flow signal. The signal from the external controller to the valve is a position command signal. Note that many valves control the flow within a pipe, but not all such valves are necessarily <i>Flow Valves</i> , as per ISA 5.1. Only valves that have a control loop with flow as the initiating variable are <i>Flow Valves</i> .
LV	Level Valve – a valve with or without a positioner, that is positioned by an external controller, that uses level as its initiating or measured variable. The signal from the external controller to the valve is a position signal. Note that while the valve may control the flow within the pipe, it is not a <i>Flow Valve</i> if the initiating variable is <i>Level</i> .
PV	Pressure Valve – a valve with or without a positioner, which is positioned by an external controller based upon level as its initiating or measured variable. The signal from the external controller to the valve is a position command signal. Note that while the valve may control the flow within the pipe, it is not a <i>Flow Valve</i> if the initiating variable is <i>Pressure</i> .
UV	Multivariable Valve – a valve with or without a positioner, that is positioned by an external controller based upon multiple variables as input into the





controller. The signal from the external controller to the valve is a position command signal. Note that while the valve may control the flow within the pipe, it is not a *Flow Valve* if there are multiple initiating variables.

7.1.6.4 Actuated Valves (Modulated) with Operator Control

A valve with an actuator that is positioned by a signal controlled by a human operator is to be identified by the major initiating variable that the operator would reference. Note that this definition is only marginally consistent with ISA 5.1, as a direct interpretation of ISA 5.1 would likely result in a HV – *Hand Valve* identification. Discussions with City personnel have indicated that it is not desirable to identify these valves as *Hand Valves*, which in their opinion, should be reserved for manual valves. Not that this identification only applies to modulating valves and not to on/off valves.

Examples:

FV-T4061 An valve actuated from a signal, that is controlled by an operator via an HMI interface. The operator periodically monitors a flow rate in the process and manually adjusts the position setpoint for the valve.

7.1.6.5 Actuated On/Off Valves

An on/off valve with an actuator that is controlled by an external controller is to typically be identified as an XV, or *Undefined Valve*. ISA 5.1 is not clear on how to address the identification of on/off valves, and while YV (State Valve) or UV (Multivariable Valve) are potential identifiers, common industry practice is that XV is commonly utilized. Discretion must be applied, and while there are cases where on/off valves with other initial variables would be appropriate, it is recommended that all on/off valves, where the initiating variable is not clear, be identified as XV. On/Off valves with remote operator control are also to be identified as XV, unless the initiating variable that the operator is responding to is absolutely clear.

XV-G6011	An on/off intake damper on an air handler, AHU-G601, which closes when the air handler is not in operation.
XV-M1511	An on/off discharge valve on a pump, P-M151, which closes when the pump is not in operation.
LV-S2032	An on/off valve that shuts off when the level in tank TK-S203 exceeds a setpoint. This is an example where the initiating variable is clearly level, and the valve should be identified as such.
XV-R325	An on/off value that interconnects two forcemains in a wastewater forcemain application, that is actuated by operator control. Note that the loop number is only three digits as this is a <i>Collections</i> application.

7.1.7 Multi-Function Instruments

Each discrete physical instrument shall only be given one instrument identifier, regardless of the number of functions within that instrument. For example, a submersible pump protection relay may have a temperature relay and a leak detection relay within one device. The instrument would be identified with a single identifier and a functional designation of UY. If it is desired to show the specific functionality of the instrument, then the subcomponent format described in Section 7.6 shall be utilized.

7.1.8 Additional Clarifications

7.1.8.1 Submersible Pumps and Mixer Leak Detection

Submersible pump and mixer leak detection sensors shall be identified with a functional designation of ME (Moisture Element).

7.1.8.2 Temperature Transmitters

Temperature transmitters with integrated temperature elements shall be identified with a functional designation of TT or TIT. In the event that the integrator temperature element of the temperature transmitter requires identification, utilize the subcomponent format (i.e. S682-TT.TE). On P&IDs, do not show the temperature element if integrated with the temperature transmitter. Refer to Figure 7-1 for examples.

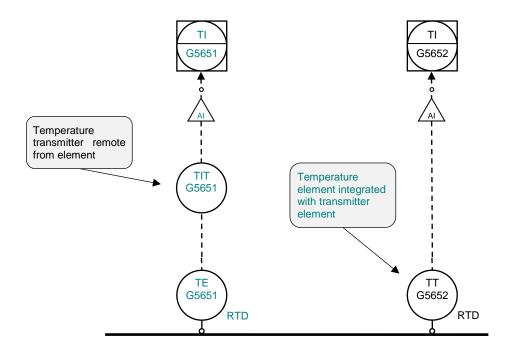


Figure 7-1: Example Temperature Transmitters



7.2 Automation Equipment

7.2.1 Identifier Format

The identification format for automation equipment, other than instrumentation, is as follows.

FFFF	-	EEEE	-	Α	NN(N)(N)	-	S
Facility Code (Optional)	-	Equipment Functional Designation	-	Area Code	Equipment Number	-	Suffix (Optional)

Where,

FFFF	is the <i>Facility Code</i> , from Appendix A. The <i>Facility Code</i> will typically be implied, and would only be fully written where required.
EEEE	is the <i>Equipment Functional Designation</i> , which is comprised of 2 to 4 characters from Section 7.2.2.
А	is the Area Code, which is based on Section 2.3.
NN(N)(N)	is the <i>Equipment Number</i> . Select numbers consistent with the ranges in Appendix D.
S	is the Suffix, an optional numeric or letter code to distinguish between multiple pieces of equipment with a common equipment number. Generally, numbers are utilized for equipment in series, and letters for equipment in parallel.

0101-PLC-G8101	A PLC located in the Grit area of the NEWPCC facility.
PLC-G110	A PLC dedicated to pump P-G110.
RIO-G110-1	Remote I/O associated with PLC-G110
JBA-G851	A junction box not associated with a specific mechanical unit of equipment, and thus numbered in the 800 series equipment numbers.
JBA-L52	An automation junction box in a Collections Facility.

88 of 112

7.2.2 Functional Designations

Functional Designation	Description	Notes
ADP	Automation Device Panel	
СА	Cable (Automation)	
СР	Control Panel / Cabinet	
CS	Computer Server	
CW	Computer Workstation - General	
CWD	Computer Workstation - Development	
CWO	Computer Workstation - Operator	
DCS	Distributed Control System	
FDP	Field Device Panel	Use for new installations should not be common.
GDC	Gas Detection Controller	
LHMI	Standalone Human Machine Interface (HMI) Terminal	e.g. local touchscreens
ISB	Intrinsic Safety Barrier Typically only a subcompo	
JBA	Junction Box (Automation)	
LCP	Local Control Panel	
PLC	Programmable Logic Controller	
PRN	Printer	
RIO	Remote I/O	
RTU	Remote Terminal Unit	
ТВ	Terminal Block	Subcomponent only.

Notes:

1. Avoid overlap of Automation Equipment Functional Designations with Electrical, Mechanical, or Process Functional Designations.

7.2.3 IT Equipment Designations

Equipment within the domain of the City's Information Technology division may utilize a City IT specific identifier. Where this IT identifier is utilized, it is recommended that it is utilized in parallel to the identifiers in this standard. The rationale for this is as follows:

- The IT identifiers are created and tracked by a separate division within the City and are not managed by the same groups responsible for the remainder of the assets of the Water and Waste department.
- The IT identifiers are not consistent with this standard. .
- The IT identifiers are applied in a "serial number" style to a specific piece of hardware, and not utilized as an asset identifier, as per the equipment within this standard. For example, if a computer is replaced, the IT identifier would change. However, for computers shown on automation drawings, use of the IT identifier in the automation domain would require that all relevant drawings with identifiers be updated.
- It is recommended to segregate the IT and Automation domains as much as possible.





7.3 Automation Cables

7.3.1 Instrumentation Cables

The identification format for automation cables is as follows. Note that the identification of power cables is discussed in Sections 6.4.2 and 6.4.3.

CA	-	Α	NN(N)(N)T	-	S
Cable Designation	-	Area Code	Loop Number of Instrumentation	-	Suffix (Optional)

Where,

CA	is the <i>Cable Designation</i> , which for automation cables is comprised of the letters CA.
А	is the Area Code, which is based on Section 2.3.
NN(N)(N)T	is the <i>Loop Number</i> of the associated instrument. Where the cable connects two instrumentation devices with different loop numbers, identify the cable by the device that provides the signal.
S	is the <i>Suffix</i> utilized to identify the specific cable associated with the loop The Suffix is not required if a single cable is associated with the instrument loop. Utilize sequential numbers for cables in series, or for different purposes, and letters for cables in parallel.

- CA-G6831 A cable from FSL-G6831 to a control panel.
- CA-S5011-1 A signal cable from a flowmeter to a control panel mounted instrument, FC-S5011.




Figure 7-2: Instrument Cable Identification Example – Level Transmitter



7.3.2 Cables Associated with Identified Equipment

The identification format for automation cables is as follows.

СА	-	Α	NN(N)(N)	-	S
Cable Designation	-	Area Code	Equipment Number of Associated Equipment	I	Suffix (Optional)

Where,

CA	is the <i>Cable Designation</i> , which for automation cables is comprised of the letters CA.
А	is the Area Code, which is based on Section 2.3.
NN(N)(N)	is the <i>Equipment Number</i> of the associated equipment. Where the cable connects two pieces of equipment, identify by the downstream, or serviced piece of equipment.
S	is the <i>Suffix</i> utilized to identify the specific cable associated with the equipment. The Suffix is not required if a single cable is associated with the equipment. Utilize sequential numbers for cables in series, or for different purposes, and letters for cables in parallel.

Note: In some cases, a cable could be considered either associated with instrumentation (4 digit loop number as per Section 7.3.1) or equipment (3 digit equipment number as per this section). It is left up to the designer to select the most appropriate cable identifier.

CA-G683-1	A 120 VAC control cable for pump I	P-G683.

- CA-F723 A control cable for UPS-F723
- CA-P711 A cable with a signal from a breaker status in PNL-P711.




Figure 7-3: Instrument Cable Identification Example – Identified Equipment



7.4 Sample P&ID

A sample pump P&ID is provided below to illustrate typical conventions for identifying instrumentation.

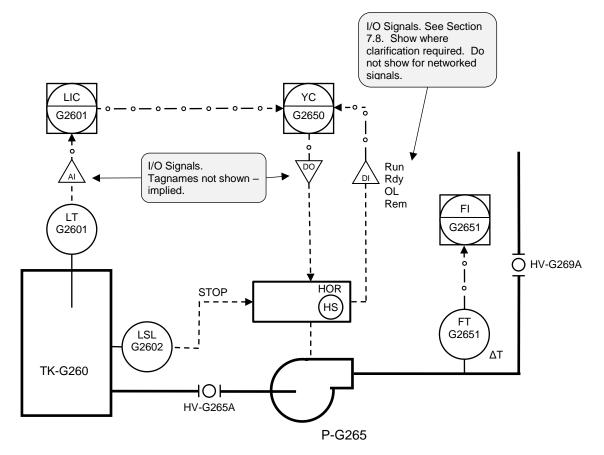


Figure 7-4: Sample Pump P&ID



7.5 Wire Tags

7.5.1 Power Circuits within Control Panels

Power circuits within control panels only require unique identification within the control panel. Where power circuits extend outside the panel, they will typically be based upon the wire tagging scheme identified in Sections 7.5.2 and 7.5.3.

The identification format for power circuit wire tags within control panels is as follows.

D	W
Power	Wire
Designation	Number

Where,

D

W

is the *Power Designation*, which is based upon Table 7-5. is the *Wire Number*, an incrementing number.

Table 7-5 : Wire Tag Power Designations

Power Designation	Description
С	DC Common (0V)
G	Ground
L	AC Power (Hot)
Ν	AC Neutral
Р	DC Positive
NEG	DC Negative (not grounded)

Note: The Ground designation is not typically required, provided that the ground wire is green. Examples:

- L1 Main 120VAC circuit within a control panel.
- L11 120VAC sub-circuit, after fuse FU-11.
- N1 AC Neutral associated with circuit L1.
- P22 24VDC circuit
- C1 24VDC common wire (0V)



7.5.2 Control Circuits

The identification format for automation control circuits is as follows:

Α	NN(N)(N)	Т	-	W	S
Area Code	Equipment Number	Instrument Number	-	Wire Number	Suffix (Optional)
	Loop Number				

Where,

А	is the Area Code, which is based on Section 2.3.
NN(N)(N)	is the <i>Equipment Number</i> of the associated equipment. If no equipment is associated, allocate <i>Equipment Numbers</i> specific for the applicable instrumentation.
т	is the <i>Instrument Number</i> , where the number increments from the number 1 through 9. Use of the number 0 should be infrequent, except for special instruments, or those where the instrument ending with 0 is a common instrument that serves other instruments.
NN(N)(N)T	is the Loop Number, comprised of the <i>Equipment Number</i> together with the <i>Instrument Number</i> .
W	is the <i>Wire Number</i> , which is typically an incrementing number. For power wires the <i>Wire Number</i> shall be based on Table 7-5.
S	is an optional <i>Suffix</i> , and is utilized where it is desired to utilize the same wire number, but the signal has changed.

Notes:

- 1. It is not required that the Wire Number match the control panel terminal number.
- 2. See Section 6.4.6.4 regarding wire numbering for motor control circuits.

G6521-11	Control wire 11 associated with TSH-G6521.
G6521-11A	Control wire 11A associated with TSH-G6521.
G6522-P	24VDC Power wire for FT-G6522.
G6522-C	24VDC Common wire for FT-G6522.

7.5.3 Analog Signal Circuits - Instruments

The identification format for analog signal circuits associated with instruments is as follows:

Α	NN(N)(N)	Т	-	W	Α
Area Code	Equipment Number	Instrument Number	-	Wire Number (Optional)	Analog Designation
	Loop Number				

Where,

A	is the Area Code, which is based on Section 2.3.
NN(N)(N)T	is the Loop Number, comprised of the <i>Equipment Number</i> together with the <i>Instrument Number</i> .
W	is the <i>Wire Number</i> , an incrementing number. The wire number may optionally be omitted for two wire control.
A	is the Analog Designation, which is typically either "+" or "-". For power wires the designation shall be based on Table 7-5.

Notes:

- 1. It is not required that the Wire Number match the control panel terminal number.
- 2. For two-wire signals, use "+" and "-" designations. Do not utilize a power designation "-P" for two wire signals.

G6523+	Signal wire + associated with TT-G6523.
G6523-	Signal wire - associated with TT-G6523.
M4215-1+	Signal wire 1+ associated with FT-M4215
M4215-P	24VDC power wire associated with FT-M4215 (Four wire signal).

Page

96 of 112

7.5.4 I/O Wiring

I/O wiring within a control panel is designated by the I/O address rather than the connected instrument. This allows for a more straightforward control panel layout, and avoids relabeling internal panel wiring upon reallocation of I/O. The identification format for I/O wiring in a control panel is as follows:

DD	R	-	М	-	Ν	S
I/O Designation	Rack Number (Optional)		Module Number (Optional)		I/O Number	Suffix Designation (Optional)

Where,

DD	is the I/O Designation, which is based on Table 7-6.
R	is the <i>Rack Number</i> , which is typically one or two digits. A Rack Number is not applicable to all I/O systems.
М	is the <i>Module Number</i> , which is typically one or two digits. A <i>Module Number</i> is not applicable to all I/O systems.
S	is the <i>Suffix Designation</i> , if applicable, which is based on and typically is either "+" or "-".

Table 7-6 : I/O Designations

Power Designation	Description
AI	Analog Input
AQ	Analog Output
1	Discrete Input (AC or DC)
Q	Discrete Output (AC or DC)

Table 7-7 : Suffix Designations

Suffix Designation	Description
С	Utilize for isolated DC discrete input modules to designate the specific common line.
L	Utilize for isolated output modules and relay modules to designate an AC incoming line.
N	Utilize for isolated AC discrete input modules to designate the specific neutral line.
Р	Utilize for isolated output modules and relay modules to designate an DC incoming line.
+	Analog positive or incoming wire.
-	Analog negative or outgoing wire.

Notes:

- 1. The I/O Wiring Designation is to be utilized within a control panel only. Utilize wire designations based upon Sections 7.5.2 and 7.5.3 for wiring outside the control panel.
- 2. It is acceptable for a wire on one side of a terminal to be designated by an I/O designation and to have an alternate identifier for the wire on the other side of the terminal.

AI1.0.1+	Analog input + wire associated with rack 1, module 0, point 1.
AQ5.3-	Analog output – wire associated with module 5, point 3. The rack number is not applicable.
152	Discrete input 52. The rack number and module number are not applicable.
15.3.31	Discrete input associated with rack 5, module 3, point 31.
Q2.1.5	Discrete output associated with rack 2, module 1, point 5.
Q3.2.5L	Incoming AC line signal for discrete output relay associated with rack 3, module 3, point 5.

7.6 Subcomponents

7.6.1 Instrumentation Subcomponents

As described in Section 2.6, devices that are an inherent component of a larger unit of equipment or instrumentation are designated as subcomponents. With a strict implementation of ISA 5.1, these subcomponents would potentially be given full identifiers. However, in assigning full identifiers for these signals, the relationship between the subcomponent and its parent piece of equipment is not always clear. Additionally, more identifiers are used as a result of having to assign an identifier to each subcomponent. A good example of instrumentation subcomponents is a valve with limit switches. The limit switches are typically deemed to be a subcomponent of the valve.

As described in Section 2.6, subcomponents can be identified by extending the containing equipment name with a suffix. The parent equipment identifier and suffix are to be separated by a period. This system creates a hierarchy, allowing for rapid identification of subcomponents and reduces programming efforts when integrating these signals into an automation system.

A good example for a mechanical piece of equipment that contains subcomponents is a valve actuator with integrated open and closed limit switches. The limit switches would not typically be labelled separately in the field, as there is no specific discrete equipment to attach the label to, other than the valve actuator as a whole. The suffix would be based upon the subcomponent's functional identification. For example, a P&ID example with a subcomponent is shown in Figure 7-5. Note that the subcomponents of the valve are the limit switches, identified as follows:

XV-G381.ZSO The open limit switch of the valve XV-G3811

XV-G381.ZSC The closed limit switch of the valve XV-G3811

MS-6381.HS The Hand-Off-Remote switch on motor starter MS-G381.

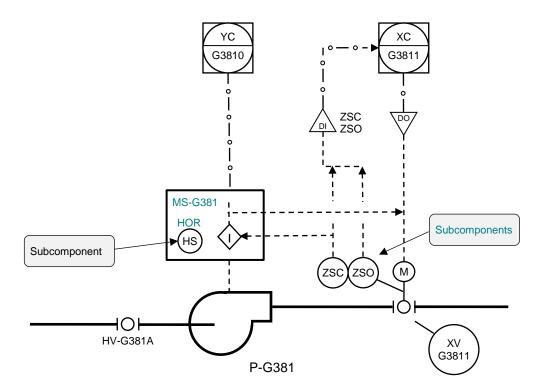


Figure 7-5 : Subcomponents – Electrical and Instrumentation

7.6.2 Panel Subcomponents

Devices within control panels, automation device panels, junction boxes, and other panels should typically be identified as subcomponents unless they are accessed separately from the containing panel. Examples of equipment not to be identified as subcomponents are shown in Table 7-8.

Table 7-8 : Automat	ion Equ	ipment	Not To Be Identified as Subcomponents

Functional Designation	Description
CS	Computer Server
CW	Computer Workstation - General
CWD	Computer Workstation - Development
CWO	Computer Workstation - Operator
GDC	Gas Detection Controller
LHMI	Standalone Human Machine Interface (HMI) Terminal
PLC	Programmable Logic Controller
PRN	Printer
RIO	Remote I/O
RTU	Remote Terminal Unit

7.7 Software Configuration File Naming

Where software to configure automation equipment does not include integral version management, software configuration file names shall be composed as follows.

FFFF		E*		ΥΥΥΥ	ММ	DD	-	X
Facility Code (Optional)	-	Equipment Identifier	-	Year	Month	Day	-	Revision Modifier
				Date				(Optional)

Where,

FFFF	is the <i>Facility Code</i> , from Appendix A. The <i>Facility Code</i> will typically be implied, and would only be included in the filename where required.
E*	is the unique <i>Equipment Identifier</i> , as identified by other sections of this document.
YYYYMMDD	is the date of the last edit.
Х	is the <i>Revision Modifier</i> , which a letter beginning with A, B, C used to indicate intra-day revisions.



Winnipèg Document Code:	e	Identification Standard	Revision:	04	Page	100 of 112
	Winnipeg		Document Code:			

PLC-G250-20120819	A PLC program for PLC-G250 last edited on August 19, 2012.
LT-M1011-20120501-B	A configuration file for level transmitter LT-M1011, dated May 1, 2012, second revision.
NSW-C901-20121231	A network switch configuration file dated December 31, 2012.



7.8 I/O and Signal Tags

7.8.1 Discrete Input Signals

Identification of discrete input signals (I/O) will be as follows:

E*	-	F	_	S
Base Equipment / Instrument Identifier	•	Functional Signal Designation		Suffix (Optional)

Where,

E*	is the <i>Base Equipment / Instrument Identifier</i> , based upon other parts of this document. See the examples for clarification.
F	is the <i>Functional Signal Designation</i> , which represents the type of discrete signal. The <i>Functional Signal Designation</i> shall utilize ISA-5.1 style naming convention where applicable, but if not applicable, shall be based on Table 7-9.
S	is the optional <i>Suffix</i> , which is a number utilized to differentiate between multiple similar signals.

Table 7-9 : Discrete Input Functional Signal Designations - Non ISA

Signal	Description
.Auto	Hand Switch Auto Position
.Вур	Hand Switch Bypass Position
.Flt	Faulted (See Note 5)
.HS_*	Signal from Hand Switch Integrated into Equipment. (See Note 4)
.Loc	Hand Switch Local Position
.Man	Hand Switch Manual Position
.Occ	Hand Switch Occupied Position
.Off	Hand Switch Off Position
.Rdy	VFD / Motor Starter Ready
.Rem	Hand Switch Remote Position
.Rst	Hand Switch Reset Pushbutton
.Run	Motor Running
.RunHi	Motor Running High Speed
.RunLo	Motor Running Low Speed
.Start	Hand Switch Start Pushbutton
.Stop	Hand Switch Start Pushbutton



Notes:

- 1. The above list does not indicate ISA 5-1 style functional designations, based upon Table 7-1, where applicable. This table is to be utilized only when an ISA 5-1 style designation is not appropriate or clear.
- 2. The above list is not exhaustive, and the designer is expected to follow a similar convention to the above when assigning new signal names. Commonly used signal names should be added to the table.
- 3. ISA 5.1 style designations are to utilize capital letters only. Non ISA-5.1 designations are to use a first capital letter, followed by lowercase letters.
- 4. A combination of ISA and non-ISA designations is permissible, provided they are connected via an underscore. For example: HS_Rem represents a hand switch remote position for a non-identified switch on a piece of equipment.
- 5. Utilize Flt (Fault) rather than an overload designation for the signal coming from a motor overload. With current electronic overloads, multiple conditions other than just an overload can cause an alarm/trip and the fault designation is more appropriate.

HSS-G1051	Stop pushbutton signal from HSS-G1051, which is associated with pump P-G105. Note that no Functional Signal Designation is required, as only a single, unambiguous signal is provided from the switch.
P-G105.Rem	The switch in <i>Remote</i> signal from the <i>Hand-Off-Remote</i> switch HS-G105, which is associated with pump P-G105. A Functional Signal Designation is required to clarify the indicated specific switch position.
VFD-G101.Flt	VFD fault signal for pump P-G101. As the fault is associated with the VFD, the VFD is deemed to be the <i>Source Equipment / Instrument Identifier</i> .
AHU-M602.Run	Running signal from AHU-M602 motor starter. As the air handling unit is deemed to be the functional source of the running signal, it is deemed to be the <i>Source Equipment / Instrument Identifier</i> .
FT-S6021.Flt	Fault signal associated with flow transmitter FT-S6021.
XV-S3810.ZSC	Closed limit switch signal from valve XV-S3810.
XV-S3810.Auto	Hand switch in auto signal from valve XV-S3810.
TSH-G1051	A high temperature signal from TSH-G1051.
TSH-G1052-1	A high temperature signal from TSH-G1052-1.
TY-G1053.TSH	A high temperature output signal from a temperature relay.

)©	Identification Standard	Revision:	04	Page	103 of 112
Winnipèg	identification Standard	Document Code:			

Acceptable Alternate

In some cases, equipment may be complex, and it may be desired to associate all I/O directly with the source instrument / device / equipment, even for motor control. If this scheme is implemented, it is to be consistent across the facility. Note that this scheme is not currently accepted for wastewater facilities.

Example:

HS-G1050.Rem The switch in *Remote* signal from the *Hand-Off-Remote* switch HS-G105, which is associated with pump P-G105. In this alternate scenario, note that the Base Equipment / Instrument Identifier is the actual instrument rather than the associated equipment. A Functional Signal Designation is required to clarify the indicated specific switch position.

7.8.2 Discrete Output Signals

Identification of discrete output signals (I/O) will be as follows:

E*	-	Cmd	F	_	S
Controlled Equipment / Instrument Identifier	•	Output Designation	Functional Signal Designation		Suffix (Optional)

Where,

E*	is the <i>Controlled Equipment / Instrument Identifier</i> , based upon other parts of this document.
Cmd	Is the Output Designation, utilized to identify all outputs signals.
F	is the <i>Functional Signal Designation</i> , which represents the type of discrete signal. The <i>Functional Signal Designation</i> shall be based on Table 7-10.
S	is the optional <i>Suffix</i> , which is a number utilized to differentiate between multiple similar signals.

AHU-M602.CmdRun	Motor run output signal for AHU-M602.
VFD-M602.CmdEnb	Enable command to the VFD-M602, which is associated with AHU-M602. The <i>Controlled Equipment / Instrument Identifier</i> is deemed to be the VFD, as the enable command is deemed to be specific to the VFD.
YL-M6011.CmdOn	Output signal to turn on pilot light YL-M6011.
XV-S3810.CmdCls	Close signal command to valve XV-S3810.

Table 7-10 : Discrete Output Functional Signal Designations

Signal	Description
.CmdRun	Run Command
.CmdRunHi	Run Command – High Speed
.CmdRunLo	Run Command – Low Speed
.CmdRst	Fault Reset Command
.CmdCls	Close Command
.CmdOpn	Open Command
.CmdEnb	Enable Command
.CmdExt	Extend Command (utilize for samplers)
.CmdRet	Retract Command (utilize for samplers)

Notes:

- 1. The above list is not exhaustive, and the designer is expected to follow a similar convention to the above when assigning new signal names. Commonly used signal names should be added to the table.
- 2. All discrete outputs are to be prefixed with the Cmd designation.

7.8.3 Analog Signals Generated From Equipment

Identification of analog control system software I/O and signal tags, where the source of the signal is not identified as an instrument, will be as follows:

E*		F	_	S
Equipment	•	Functional		Suffix
Identifier		Variable		(Optional)

Where,

E*	is the Equipment Identifier, based upon other parts of this document.
F	is the <i>Functional Variable</i> , which represents the type of analog signal. This field is only required for multivariable transmitters. The <i>Functional Variable</i> shall be based on the first column of Table 7-1, with an optional character from the second column. Note that the <i>Functional Variable</i> is based upon ISA 5.1.
S	is the optional <i>Suffix</i> , which can be any short designation appropriate to represent the specific signal. Ideally the suffix will be four characters or less. The <i>Suffix</i> is separated from the Functional Variable by an underscore.

Note:

1. Do not use this format for analog signals from identified instruments. Refer to Section 7.8.4.

UPS-G702.E_Bat	UPS–G702 Battery Voltage Level
UPS-G702.E_In	UPS-G702 Input Voltage Level
UPS-G702.E_Out	UPS-G702 Output Voltage Level
VFD-G101.T	VFD-G101 internal temperature.
CB-M01.RLY.E_An	The voltage signal between phase A and neutral for the protection relay associated with circuit breaker CB-M01.
MS-S501.I_A	The phase A current associated with motor starter MS-S501.

7.8.4 Analog Measured Signals Generated From Instruments

Identification of analog control system software I/O and signal tags, where the source of the signal is an instrument, will be as follows:

I *	•	F		S	
Instrument	•	Functional Variable		Suffix	
Identifier		(Optional)		(Optional)	

Where,

*	is the Instrument Identifier, based upon other parts of this document.
F	is the <i>Functional Variable</i> , which represents the type of analog signal. This field is only required for multivariable transmitters. The <i>Functional Variable</i> shall be based on the first column of Table 7-1, with an optional character from the second column. Note that the <i>Functional Variable</i> is based upon ISA 5.1.
S	is the optional <i>Suffix</i> , which can be any short designation appropriate to represent the specific signal. Ideally the suffix will be four characters or less. The <i>Suffix</i> is separated from the <i>Functional Variable</i> via an underscore.

MT-G6231	Moisture signal of MT-G6231
FT-S5122.P	Pressure signal of differential pressure based flow transmitter FT- S5122.
FT-S5122.F	Flow signal of multivariable transmitter FT-S5122.
FT-S5122.T	Temperature signal of multivariable transmitter FT-S5122.
FV-G6821.Z	Position of damper FV-G6821.
PDT-G4231.P_H	High side pressure of differential pressure transmitter PDT-G4231.
PDT-G4231.P_L	Low side pressure of differential pressure transmitter PDT-G4231.
PDT-G4231.PD	Differential pressure of differential pressure transmitter PDT-G4231
TT-M613	TT-M613 temperature signal

7.8.5 Analog Output Signals

Identification of analog control system software I/O and signal tags, where the source of the signal is a controller such as a PLC, will be as follows:

E*	-	Cmd	F	-	S
Controlled Equipment / Instrument Identifier	•	Output Designation	Functional Variable	-	Suffix (Optional)

Where,

E*	is the <i>Controlled Equipment / Instrument Identifier</i> , based upon other parts of this document. The <i>Controlled Equipment / Instrument Identifier</i> should be the ultimate controlled equipment.
Cmd	Is the Output Designation, utilized to identify all outputs signals.
F	is the Functional Variable, which represents the type of analog signal. The

- is the *Functional Variable*, which represents the type of analog signal. The *Functional Variable* shall be based on the first column of Table 7-1, with an optional character from the second column. Note that the *Functional Variable* is based upon ISA 5.1 and in this case will represent the specific output signal, not necessarily the loop identification.
- S is the optional *Suffix*, which can be any short designation appropriate to represent the specific signal. Ideally the suffix will be four characters or less. The *Suffix* is separated from the *Functional Variable* via an underscore.

FV-M2151.CmdZ	Valve position command signal from flow indicating controller FIC- M2151. Note that while the control loop is based on flow, the specific signal is a Z, driving the valve position.
P-M210.CmdS	Pump speed command signal. Note that the pump is the ultimate controlled equipment and not the variable speed drive.
BLR-B610.CmdT	Boiler temperature command signal. This would be appropriate when the destination of this signal is a boiler that has an integral dedicated controller.
HCE-B619.CmdJ	Power command signal (in % of full power) to an electric heating coil controller. In the event that the signal represented a specific temperature setpoint, then the <i>Functional Variable</i> would be a T.
TC-B610.CmdT	Temperature command / setpoint signal to an external temperature controller TC-B610.
TV-G6822.CmdZ	Temperature valve position command signal.

7.8.6 Control System Software Implementation

Where a control system software implementation does not support the use of the "." character used in the signal identification, it is recommended to replace the period "." character with an underscore ("_"). For example:

P-G101.Flt would become P-G101_Flt



8 COMMUNICATION EQUIPMENT

8.1 Identifier Format

The identification format for communication equipment is as follows.

FFFF	-	EEEE	-	Α	NN(N)(N)	-	S
Facility Code (Optional)	-	Equipment Functional Designation	-	Area Code	Equipment Number	-	Suffix (Optional)

Where,

FFFF	is the <i>Facility Code</i> , from Appendix A. The <i>Facility Code</i> will typically be implied, and would only be fully written where required.
EEEE	is the <i>Equipment Functional Designation</i> , which is comprised of 2 to 4 characters from Section 8.2.
А	is the Area Code, which is based on Section 2.3.
NN(N)(N)	is the <i>Equipment Number</i> . Select numbers consistent with the ranges in Appendix D.
S	is the Suffix, an optional numeric or letter code to distinguish between multiple pieces of equipment with a common equipment number. Generally, numbers are utilized for equipment in series, and letters for equipment in parallel.

NSW-G901	An Ethernet switch located in the G area.
JBN-G110	A networking junction box associated with pump P-G110.
NJ-G901-1	A networking jack associated with NSW-G901.

8.2 Functional Designations

Table 8-1 : Communication	Equipm	ent Functional	Designations
			Doorginationio

Functional Designation	Description	Notes
ANT	Antenna	
CN	Network Cable	
CNP	Network Cable - Patch	
JBN	Junction Box - Network	
MDM	Modem	
NAP	Network Access Point	
ND	Network Device	Utilize for general devices not otherwise in list. Example: network terminators
NFW	Network Firewall	
NGW	Network Gateway	
NJ	Network Jack	
NJT	Network Jack – Telephone	
NMC	Network Media Converter	
NP	Networking Panel / Cabinet	
NPP	Networking Patch Panel	
NRD	Network Radio	
NRP	Network Repeater	
NRT	Network Router	
NSP	Network Segment Protector	Typically used for PROFIBUS PA
NSW	Network Switch, Ethernet	
NT	Network Terminator	

Notes:

1. Avoid overlap of Communication Equipment Functional Designations with Electrical, Mechanical, and Automation Functional Designations



8.3 Network Cables

The identification format for network cables is as follows.

CN	-	Α	NN(N)(N)	-	S
Cable Designation	-	Area Code	Equipment Number of Associated Equipment	-	Suffix (Optional)

Where,

CN	is the <i>Cable Designation</i> , which for network cables is comprised of the letters CN.
А	is the Area Code, which is based on Section 2.3.
NN(N)(N)	is the <i>Equipment Number</i> of the associated equipment. Where the cable connects two pieces of equipment, identify by the downstream, or serviced piece of equipment.
S	is the <i>Suffix</i> utilized to identify the specific cable associated with the equipment. The Suffix is not required if a single cable is associated with the equipment. Utilize sequential numbers for cables in series, or for different purposes, and letters for cables in parallel. Utilize the letter T to designate tie connections.

Examples:

CN-G901-1	An uplink network cable for NSW-G901.
CN-M2531	A network cable that connects level transmitter LT-M2531.
CN-M801	A network cable that connects PLC-M801 to NSW-M910.

Ĩ	Identification Standard	Revision:	04	Page	112 of 112
Winnipeg		Document Code:			

The following Appendices have been moved to a separate document titled *Identification Standard* Appendices managed by the Wastewater Planning and Project Delivery Branch. To request a copy of the document, please contact the Wastewater Planning and Project Delivery Branch Head.

Appendix A	Facility Codes
Appendix B	Facility Area Codes
Appendix C	Master Equipment Functional Designations
Appendix D	Equipment Number Ranges
Appendix E	Sample Drawings



The City of Winnipeg

Water & Waste Department

Identification Standard Appendices

Document Code: Revision: 02

Approved By:

Michelle Pastkau

March 16, 2021

Michelle Paetkau, Wastewater Planning Branch Head

Date



REVISI	REVISION REGISTER					
Rev.	Description	Date	Ву	Checked	Approved	
00	Created as a separate document for Identification Standard Appendices	2019-12-02	L. Harrington	E. Campbell C. Wiebe	C. Wiebe	
01	Updated Facility Codes	2020-06-02	K.Schimke	D.Griffin	D.Griffin	
02	Updated Facility Codes	2021-03-01	K. Schimke	M. Paetkau	M. Paetkau	

This document is owned and maintained by the Wastewater Planning and Projects Delivery Branch of the Engineering Services Division. For questions, comments or revisions please contact the Wastewater Planning and Projects Delivery Branch Head.



TABLE OF CONTENTS

1 Introductio		luction	4
	1.1	Document Revisions	4
Appe	ndix A	Facility Codes	5
Appe	ndix B	Facility Area Codes	19
Appe	ndix C	Master Equipment Functional Designations	
Appe	ndix D	Equipment Number Ranges	32
Appe	ndix E	Sample Drawings	37



INTRODUCTION 1

٢

Winnipeg

This Water and Waste Department (WWD) Identification Standard Appendices (appendices) document is to be referenced for consistent and accurate identification for facilities. The appendices will be coordinated with the Identification Standard and document numbering standards as appropriate.

1.1 **Document Revisions**

Wastewater Planning and Project Delivery Branch (WWPPD) will issue revisions to the document on an as required basis. WWPPD will send out an email requesting review and comments by the division list below.

All proposed revisions shall be circulated to the following divisions and branches:

- Water Services Division •
- Wastewater Services Division •
- Solid Waste Services Division •
- **Engineering Division** •
 - Asset Management Branch
 - Design and Construction Branch 0
 - Drafting and Graphic Services Branch
 - Land Drainage and Flood Protection Branch
 - Wastewater Planning and Project Delivery Branch
 - Water Planning and Project Delivery Branch 0

Revision:

Appendix A **Facility Codes**

٢

Winnipèg

Each City of Winnipeg facility is assigned a unique, four-digit facility code. The facility code is to be used on drawings and documentation as required. The facility code appears within all City drawing numbers, but need not be shown within the content of the drawing. The facility code is deemed an optional component of equipment and instrument identifiers, with the preference to omit the facility code to reduce the overall length of identifiers.

Systems such as a central Supervisory Control and Data Acquisition (SCADA) system that monitors multiple facilities are to make use of the facility code to segregate components by facility. The implementation of the facility code may be by means of a hierarchical directory system whereby individual components are stored under a folder that is named by the facility code. If the database or system where the identifier is being stored supports an additional field for the facility code, or is based upon a hierarchical system where the identifier can be placed as a component off of a root facility branch, it is deemed to be acceptable to omit the facility code in the instrument identifier. For example, the City's current Computerized Work Management System (CWMS) has an integral asset list, where a field is provided for the facility. In this case, the facility code for the equipment identifier would not be entered.

A.1 Project Facility Codes

It is the responsibility of the Project Manager to notify Drawing Control and Underground Structures (UGS) Approval Process Technologist from the Design and Graphics Branch (D&G) of any consultant or in-house projects requiring City drawings numbers during the Planning phase of a project. In the email, provide the project name, description of the project and the anticipated deliverables (drawings), facility code(s) and any applicable area codes.

A.1.1 Creating New Facility Codes

It is the responsibility of the Project Manager to notify the WWPPD when a new facility code is required for a project. Request a new facility code by emailing WWPPD (cc. Drawing Control and UGS Approval Process Technologist from D&G) the following information:

- Project name
- Description of the project •
- Proposed facility code name ٠
- Type of facility (i.e. Collection Facility)

A review of the request will be undertaken by WWPPD in consultation with D&G and appropriate business unit (if required). WWPPD will update the Facility Codes Document and send an email with the assigned facility code to D&G and the Project Manager.

Revising Existing Facility Codes A.1.2

Only WWPPD can revise the WWD Facility Codes. If it is determined that a facility code needs to be revised, Project Managers should send an email to the WWPPD (cc. Drawing Control and UGS Approval Process Technologist from D&G) informing them of why the change is needed. Some examples that would warrant a revision include:

- Naming errors (need to align with WWD naming structure and asset categories)
- Duplication of facility codes ٠
- Decommissioning of a facility
- Merging of two facilities •



A review of the request will be undertaken by WWPPD in consultation with D&G and appropriate business unit (if required). If accepted, WWPPD will update the Facility Codes and send an email to D&G and the Project Manager.

A.2 Definitions

Future: Facility code reserved for upcoming project.

Spare: Facility code available for use within the specified facility category or sub-category (i.e. 'Sewage Treatment Facilities').

Unused: Facility codes available for a new facility category.

Discontinued: Facility code is no longer in use and is not to be reassigned.



Revision:

Facility Code	Facility	
0001	1 General – to be used only when no other facility codes apply	
0002 - 0099	Unused	
0100 - 0109	Sewage Treatment Facilities	
0100	General – Sewage Treatment Facilities	
0101	North End Sewage Treatment Plant (NEWPCC)	
0102	South End Sewage Treatment Plant (SEWPCC)	
0103	West End Sewage Treatment Plant (WEWPCC)	
0104-0109	Spares	
0110 - 0299	Collections Facilities – Lift, Flood Pumping, CSO & Diversion Stations	
0110	General – Collections Facilities (Lift, Flood Pumping, CSO and Diversion Stations)	
0111	DISCONTINUED (was Perimeter Road Pumping Station, now part of the WEWPCC Facility Code)	
0112	Alexander Diversion Station	
0113	Armstrong Diversion Station	
0114	Ash Lift and Flood Pumping Stations (separate buildings on neighbouring properties)	
0115	Assiniboine Flood Pumping Station	
0116	Aubrey Lift and Flood Pumping Stations (separate buildings on neighbouring properties)	
0117	Baltimore Lift and Flood Pumping Stations (separate buildings on neighbouring properties)	
0118	Bannatyne Flood Pumping Station	
0119	Barker Lift Station	
0120	Bournais / Mission Gardens Lift Station	
0121	Burrows Lift Station	
0122	Camiel Lift Station	
0123	Chataway Lift and Flood Pumping Station (combined station)	
0124	Clarence Lift Station	
0125	Clifton Lift and Flood Pumping Stations (separate buildings)	
0126	Cloutier Lift Station	
0127	Cockburn Lift and Flood Pumping Station (combined station) and Diversion Chamber	
0128	Colony Flood Pumping Station (formerly included in Colony Diversion Station – see 129)	
0129	Colony Diversion Station	
0130	Community Row Lift Station	
0131	Conway Lift Station	
0132	Cornish Flood Pumping Station	



Facility Code	Facility
0133	Cornish Lift Station
0134	Crane Lift Station
0135	D'Arcy Lift Station
0136	Despins Lift and Flood Pumping Stations (separate buildings)
0137	Dublin Lift Station
0138	Dugald Road Lift Station
0139	Dumoulin Lift and Flood Pumping Station (combined station) and Diversion Chamber
0140	Elmhurst Lift Station
0141	Ferry Road Lift Station
0142	Galt Flood Pumping Station
0143	Grandmont Lift Station (underground) and Generator Building
0144	Hart Lift and Flood Pumping Stations (separate buildings on neighbouring properties)
0145	Hawthorne Lift and Flood Pumping Station
0146	Heritage Lift Station
0147	Holland Lift Station
0148	Jefferson Flood Pumping Station (formerly included Diversion Chamber – see 150)
0149	Jessie Lift and Flood Pumping Stations (separate buildings)
0150	Jefferson & Main Diversion Station
0151	Kilkenny Lift Station
0152	King Edward Lift Station
0153	Larchdale Lift Station
0154	Laverendrye Flood Pumping Station
0155	Linden Lift and Flood Pumping Stations (separate buildings)
0156	Louelda Lift Station
0157	Mager Drive Lift and Flood Pumping Stations (separate buildings on neighbouring properties)
0158	Manitoba Lift Station
0159	Marion Lift and Flood Pumping Stations (separate buildings on neighbouring properties)
0160	Mayfair Lift and Flood Pumping Station (combined station)
0161	Metcalfe Flood Pumping Station
0162	Metcalfe Lift Station
0163	Mission Flood Pumping Station
0164	Montcalm Lift Station
0165	Munroe Diversion Chamber
0166	Newton Flood Pumping and Diversion Stations (separate buildings)
0167	Notre Dame Lift Station



Facility Code	Facility
0168	Oak Grove Lift Station
0169	Olive Lift Station
0170	Pandora Lift Station
0171	Parklane Lift Station
0172	Parkwood Lift Station
0173	Polson Flood Pumping and Diversion Stations (separate buildings)
0174	Portsmouth Lift Station
0175	Pulberry Lift Station
0176	DISCONTINUED (was Ravelston Land Drainage Pumping Station, now part of 447)
0177	Ridgedale Lift Station
0178	Riverbend Lift Station
0179	Roland Flood Pumping Station
0180	Ryan Lift Station
0181	Selkirk Flood Pumping and Diversion Station (separate buildings)
0182	Somerville Lift Station
0183	Jefferson and Jones Diversion Chamber
0184	St. Charles Lift Station
0185	St. Johns Flood Pumping Station and Diversion Chamber
0186	St. Norbert / X-Kaley Flood Pumping Gate Chamber
0187	St. Norbert Lift Station
0188	Strathmillan Diversion Chamber
0189	Syndicate Lift and Flood Pumping Stations (separate buildings)
0190	Thibault Lift Station
0191	Trappiste Lift Station
0192	Tuxedo Lift Station
0193	Tylehurst Lift Station
0194	Westwood Lift Station
0195	Wexford Road Lift Station
0196	Willow Lift Station
0197	Windsor Park Lift Station
0198	Woodhaven Lift Station
0199	Assiniboine Park Lift Station
0200	Canora Flood Pumping Gate Chamber
0201	Crescent Drive Lift Station
0202	Ducharme High Level Site Manhole
0203	Enfield Crescent Lift Station
0204	Fort Rouge Park Flood Pumping Gate Chamber



Facility Code	Facility
0205	Irving Place Lift Station
0206	Kildare Flood Pumping Station
0207	Kildonan Park Lift Station
0208	Perimeter West Lift Station
0209	Kildonan Park Rainbow Stage Lift Station
0210	Saskatchewan Lift Station
0211	University of Manitoba Lift Station
0212	University of Winnipeg CSO Storage
0213	Victoria Crescent Lift Station
0214	DISCONTINUED (was Mazenod Lift Station, now part of 5-1 St Boniface Industrial Facility Code)
0215	St. Boniface Lift Station
0216	Assiniboine Park Lift Station
0217	Barker Standby Generator Building
0218	McDermot Dry Weather Overflow Manhole/CSO
0219	Windsor Park Standby Generator Building
0220	Interceptor (Mechanical, Structural, Instrumentation and Controls only)
0221	Force main (Mechanical, Structural, Instrumentation and Controls only)
0222	Trunk (Mechanical, Structural, Instrumentation and Controls only)
0223	Sewer Monitoring
0220-0299	Spares
0300 - 0399	Land Drainage Facilities – Pumping Sites and Outfalls
0300	Land Drainage Facilities - General
0301	Archibald Underpass Station
0302	Bishop Grandin Underpass Station
0303	Outfalls
0304	Keewatin Underpass Station
0305	Kenaston Underpass Station
0306	Kilkenny & Rice Flood Pumping Manhole
0307	Spare
0308	McPhillips Underpass Pumping Station
0309	Metro Route 20 Underpass Pumping Station
0310	Metro Route 90 Underpass Pumping Station
0311	Transit Underpass Pumping Station (Osborne)
0312-0313	Spares
0312-0313 0314	Spares St. James Underpass Pumping Station



Facility Code	Facility
0317	Pembina Underpass Pumping Station
0318	Pembina Wye Track Pumping Station
0319	Waverley Underpass Pumping Station
0320	Plessis Road Underpass Pumping Station
0321	Chief Peguis Underpass Pumping Station (on warranty)
0322	Beaujolais Flood Pumping Gate Chamber
0323-0399	Spares
0400	Brady Road Landfill
0401 - 0599	Land Drainage – Storm Retention Basins
0401	1-1 Weston, south of Alexander Avenue
0402	Private Storm Retention Basins
0403-0411	Spares
0412	2-2 St. James, off Isbister Street, north of Hamilton Avenue
0413	2-3 St. James, south-west of Lumsden Avenue and Lake Ridge Road
0414	2-4 St. James, north of South Lake Drive
0415	2-5 Omand's Creek Industrial, north of Whitfield Avenue in Omand's Creek Industrial Park
0416	2-6 The Oaks Along the Assiniboine, west pond
0417	2-7 The Oaks Along the Assiniboine, east pond
0418-0420	Spares
0421	3-1 Maples, south-east corner of King Edward Street and Selkirk Avenue
0422	3-2 Maples, north-east corner of King Edward Street and Burrows Avenue
0423	3-3 Maples, north of Burrows Avenue at Benbow Road
0424	3-4 Maples, north-east corner of Garton Avenue and Belton Street
0425	3-5 Riverbend, north-west of Red River Boulevard and Riverstone Road
0426	3-6 Maples, north of Templeton Avenue and west of McPhillips Street
0427	Spare
0428	3-8 Maples, east of Keewatin Street and south of Adsum Drive
0429	3-9 Maples, Foxwarren Drive, west of Ritchie Street
0430	3-10 Amber Trails, west of Amber Trail and Ambergate Drive
0431	3-11 North Inkster Industrial, east of Meridian Drive and Inksbrook Drive
0432	3-12 North Inkster Industrial, east of Meridian Drive and north of Commercial Avenue
0433	3-13 Amber Trails, east of Strasbourg Drive and south of Thorn Drive
0434	3-14 Amber Trails, west of Massalia Drive
0435	3-15 Castlebury Meadows, south-west of Jefferson Avenue and King Edward Street
0436	3-16 Waterford Green, south of Jefferson Avenue and east of Brooksmere Trail



Facility Code	Facility
	3-17 Waterford Green, north of Commonwealth Path and east of Brooksmere
0437	Trail
0438	3-18 Aurora – North Point Village, south of North Point Boulevard, between Atlas Crescent
	3-19 Amber Gates, north of Templeton Avenue, between Cartesian Gate and
0439	Tennant Gate
0440	3-20 North Inkster Industrial, south of Haggart Avenue and west of King Edward Street
0441	Spare
0442	4-2 East Kildonan, off Gateway Road north, of Springfield Road (Bunn's Creek)
0443	4-3 Transcona, Cordite Ditch
0444	4-4 Kilcona Park, north-east Park Recreation Area (Harbourview Complex)
0445	4-5 Transcona, north-west corner of Devonshire Drive and Clouston Drive
0446	4-6 Transcona, south-east of Devonshire Drive and Kildonan Meadow Drive
0447	4-7 Transcona, Deep Pond, south-west Ravelston Avenue
0448	4-8 Kilcona Park, north-east corner of Lagimodiere Boulevard and Springfield Road
0449	4-9 Harbourview South, south of McMahon Place off McLellan Drive
0450	4-10 East Kildonan, north of Ragsdale between East Spring and West Spring
0451	4-11 Eaglemere, south of Eaglemere Drive
0452	4-12 East Elmwood, north-west of Lagimodiere Boulevard and Callsbeck Avenue
0453	Spare
0454	4-14 Arrowwood, south of Headmaster Row and west of Mitchelson Way
0455	4-15 Harbourview South, east of Lagimodiere Boulevard and north of Concordia Avenue
0456	4-16 Devonshire Village, south of Cal Gardner Drive and east of Peguis Street
0457	Spare
0458	4-20 Crocus Meadows, north-west corner of Peguis Street and Ravelston Avenue West
0459	4-21 Starlight, north of El Tassi Drive and west of Fiorentino Street
0460	4-22 Devonshire Park, south of Devonshire Drive West, west of Sheilagh Ball Cove
0461	5-1 St Boniface Industrial, west of Beghin Avenue at Paquin Road
0462	5-2 St Boniface Industrial, east of Paquin Road
0463	5-3 St Boniface Industrial, south of Camiel Sys Street, east of Ray Marius Road
0464	5-38 Waterside Estates, west of Plessis Road south of Dugald Road
0465	5-5 Southdale, north-east corner of Lakewood Boulevard and Edgewater Drive
0466	5-6 Southdale, west of Beaverhill Boulevard and north of Edgewater Drive
0467	5-7 Southdale, north-west corner of Lakewood Boulevard and Beaverhill Boulevard



Page

Facility Code	Facility
0468	5-8 Southdale, south of Edgewater Drive between Sweetwater Bay and Beaverhill Boulevard
0469	5-9 Southdale, east corner of Shamrock Drive and Newcroft Road
0470	5-10 Southdale, south of Willowlake Crescent at Willow Point Road
0471	5-11 North St Vital, north of Bishop Grandin Boulevard at Kearney Street
0472	5-12 North St Vital, north of Bishop Grandin Boulevard at Glen Meadow Street
0473	5-13 North St Vital, north of Bishop Grandin Boulevard at River Road
0474	5-14 St Boniface Industrial, north of Dynamic Machine (1417 Dugald Road)
0475	5-15 Island Lakes, south of Island Shore Boulevard
0476	5-16 St Vital, south-west of Burland Avenue and Healy Crescent
0477	5-17 St Vital, south-east of Burland Avenue and Westbourne Crescent
0478	5-18 St Vital, east of Dakota Street and south of John Forsythe Avenue
0479	5-19 Island Lakes, south of Island Lakes Drive
0480	5-20 Island Lakes, north-west of Island Lakes Drive and De la Seigneurie Boulevard
0481	5-21 Southland Park, north-east of Royal Mint Drive
0482	5-22 Royalwood, south-west corner of Shorehill Drive and Aubin Drive
0483	5-23 South Transcona, north-west of St. Boniface Road and Murdock Road
0484	5-24 Royalwood, along Westwater Drive
0485	5-25 Royalwood, east of Shorehill Drive and Bridgetown Drive
0486	5-26 Buhler Recreational Park, south of the Parking Lot
0487	5-27 Buhler Recreational Park, north of Lake Shirley
0488	5-28 Sage Creek, north of Warde Avenue and east of Lagimodiere Boulevard
0489	5-29 Sage Creek, west of Des Hivernants Boulevard and north of Woodsage Crescent
0490	5-30 Sage Creek, north of Tallgrass Crescent and east of Des Hivernants Boulevard
0491	5-31 Sage Creek, east of Hydro ROW, north of Red Lily Road and south of Blue Sun Drive
0492	5-32 Sage Creek, north of Warde, west of Blue Sun Drive and east of Red Lily Road
0493	5-33 Sage Creek, east of Lagimodiere Boulevard and west of Burning Glass Road
0494	5-34 Sage Creek, north of David Friesen Road between Des Hivernants Boulevard and Burning Glass Road
0495	5-35 Sage Creek, east of Des Hivernants Boulevard and west of Hydro ROW
0496	5-36 Sage Creek, west of Wild Iris Walk and North of Prairie Smoke Drive
0497	5-37 Sage Creek, east of Wild Iris Walk and South of Vireo Lane
0498	5-39 Sage Creek, south of Warde Avenue and east of Robert Bockstael Drive
0499	5-40 Sage Creek, south of Sundog Drive



Facility Code	Facility
0500	5-41 Sage Creek, east of Ed Turner Drive and south of West Plains Drive
0501	5-42 Bonavista, west of Evelyne Reese Boulevard and north of Bow Water Drive
0502	5-43 Bonavista, east of Evelyne Reese Boulevard and south of Bonaventure Drive East
0503-0510	Spares
0511	6-1 Assiniboine Forest, south of Grant Avenue and east of Chalfont Road
0512	Spare
0513	Spare
0514	6-4 West Fort Garry Business, Lot 16 Drain west of Waverley Street
0515	6-5 Fort Garry Industrial, ditch along Bishop Grandin Boulevard
0516	6-6 Waverley Heights, north of Chancellor Drive between Swan Lake Bay and Lake Grove Bay
0517	6-7 Waverley Heights, along Lake Lindero Road
0518	6-8 Waverley Heights, south of Markham Road at Forest Lake Drive
0519	6-9 Waverley Heights, north of Markham Road and west of Forest Lake Drive
0520	6-10 Fort Richmond, north of Dalhousie Drive and east of Pembina Highway
0521	6-11 Fort Richmond, south of Dalhousie Drive and east of Pembina Highway
0522	6-12 St Norbert, north of Grandmont Boulevard and west of Nolin Avenue
0523	6-13 St Norbert, south of Grandmont Boulevard and west of Delorme Bay
0524	6-14 West Fort Garry Business, east of Kenaston Boulevard and south of Scurfield Boulevard
0525	6-15 Lindenwoods, west of Shorecrest Drive
0526	6-16 Richmond West, Point West Drive
0527	6-17 Whyte Ridge, south-west of Scurfield Boulevard and Columbia Drive
0528	6-18 Lindenwoods, north of Shoreline Drive and south of Queens Park Crescent
0529	6-19 Tuxedo West, south of West Taylor Drive and west of Dumbarton Boulevard
0530	6-20 Whyte Ridge, west of Scurfield Drive and south of Vanderbilt Drive
0531	6-21 St Norbert, south of Bellemer Drive (Grandmont Park)
0532	6-22 Lindenwoods, north of Wilkes Avenue and west of Waverly Street
0533	6-23 Tuxedo Industrial, west of Kenaston Boulevard
0534	6-24 Lindenwoods, east of Lindenwoods Drive West
0535	6-25 Linden Ridge, east of Dovercourt Drive
0536-0538	Spares
0539	6-29 Fairfield Park, south of Lee Boulevard and west of Raphael Street
0540	6-30 Kenaston Common, north of Lindenwood Drive East and west of Kenaston Boulevard
0541	6-31 Marlton, east of Oakdale Drive between Roblin Boulevard and Grant Avenue



Facility Code	Facility
0542	6-32 Waverley West (South Pointe), west of Autumnview Drive and east of Cypress Ridge Road
0543	6-33 Waverley West (South Pointe), west of Yorkvalley Way and north of Kirkbridge Drive
0544	6-34 Waverley West (South Pointe), south of Kirkbridge Drive and west of Waterstone Drive
0545	6-35 Waverley West (South Pointe), south of Northern Lights Drive and north of Turnstone Terrace
0546	6-36 Waverley West (Bridgwater Forest), south of Bridgeland Drive and east of Prominence Point
0547	6-37 Waverley West (Bridgwater Forest), west of Highland Creek Road and north of Hunterbrook Road
0548	6-38 Waverley West (Bridgwater Forest), west of Park Valley Road and south of North Town Road
0549	Spare
0550	6-40 Waverley West (South Pointe), west of Waverly Street and east of Stan Baile Drive (Not accepted by City, Naturalized, Started Warranty)
0551	4-18 Bridgewood Estates, east of Edward Schreyer opposite Concordia Avenue East
0552	6-41 Waverley West (Bridgwater Centre), west of Cooper's Town Road
0553	6-42 Waverley West (Bridgwater Centre), north-east corner of Park East Drive and Kenaston Boulevard
0554	6-43 Waverley West (Bridgwater Centre), west of Jacob's Creek Road
0555	6-44 Waverley West (Bridgwater Centre), east of Jacob's Creek Road
0556	6-45 Waverley West (Bridgwater Forest), south-east corner North Town Road and Hill Grove Point
0557	6-46 Waverley West (Bridgwater Lakes), south of Montpellier Point
0558	6-47 Waverley West (Bridgwater Lakes), south of Clear Spring Road
0559	6-48 Waverley West (Bridgwater Lakes), north-west of Bluemeadow Road and Water Bend Road
0560	6-49 Waverley West (Bridgwater Lakes), north-west of Bridge Lake Drive and Lake Bend Road
0561	6-50 Waverley West (South Pointe), south of Canvasback Cove
0562	6-51 Waverley West (South Pointe), south-west of Northern Light Drive and Stan Bailie Drive
0563	Spare
0564	6-54 Waverley West (Bridgwater Trails), north-west of Rose Lake Court
0565	6-55 Waverley West (Bridgwater Trails), north-east of Rose Lake Court
0566	6-56 Waverley West (Bridgwater Trails), south-west of Rose Lake Court
0567	6-57 Waverley West (Bridgwater Trails), south-east of Rose Lake Court
0568	6-58 Waverley West (Bridgwater Trails), east of Eaglewood Drive between Valley Brook Road and Bridge Lake Drive



Facility Code	Facility
	6-59 Waverley West (Bridgwater Trails), east of Landover Drive between Willow
0569	Creek Road and Rowntree Avenue
0570	6-60 Waverley West (Bridgwater Trails), south of Appleford Gate and west of Landover Drive
0571	6-61 Waverley West (Bridgwater Trails), south-east of Wildflower Road and north of Silver Creek Road
0572	6-62 South Pointe Phase 2, west of Kenaston Boulevard and east of Ken Oblik Drive
0573	6-63 South Pointe Phase 2, south of Waverly Street and west of Ken Oblik Drive
0574	6-64 Scotswood Meadows, south-west of the intersection at ScotsWood Drive South and Rannock Avenue
0575	6-65 Ridgewood West, east of Peregrine Point and south of McKellar Drive
0576	6-66 Ridgewood West, north of Couture Crescent and east of Cassowary Lane
0577	6-68 Bishop Grandin Crossing, north of Ballantrae Drive and east of New Market Boulevard
0578	6-69 SouthPointe Phase 2, between Berry Hill Road and Hawkridge Road
0579	6-70 South Pointe Phase 2, south of Berry Hill Road and north of Granite Grove Road
0580-0599	Spares
0600 - 0799	Water System Facilities
0600	Shoal Lake Aqueduct Intake Facility (Yard and M97.51 Backbone Repeater) Falcon River Diversion
0601	Winnipeg Drinking Water Treatment Plant (Yard and M12.87 Backbone Repeater)
0602-0619	Spares
0620	DISCONTINUED (was Deacon Booster Pumping Station, now part of the Winnipeg Drinking Water Treatment Plant Facility Code)
0621-0629	Spares
0630	MacLean Regional Pumping Station, MacLean Reservoir
0631-0639	Spares
0640	McPhillips Regional Pumping Station, McPhillips Reservoir and M01.00 Backbone Repeater McPhillips Control Centre Collections Building
0641-0649	Spares
0650	Hurst Regional Water Pumping Station, Wilkes Reservoir
0651-0659	Spares
0660	Tache Booster Pumping Station, Tache Surge Tower
0661-0700	Spares



Facility Code	Facility
	DISCONTINUED (was General Shoal Lake Aqueduct & GWWD, now part of the
0701	Shoal Lake Aqueduct and Greater Winnipeg Water District (GWWD) Railway Facility Codes)
0702	St. Boniface Yards (552 and 598 Plinguet St)
0703-706	Spares
0707	Ross (Yard and M39.00 Backbone Repeater)
0708-0710	Spares
0711	Hadashville (Yard and Backbone Repeater)
0712-0750	Spares
0751	Shoal Lake Aqueduct (includes Branch 1 Aqueduct)
0752	Branch 2 Aqueduct
0753	Aqueduct Interconnection
0754	Greater Winnipeg Water District (GWWD) Railway
0755-0797	Spares
0798	Feeder Mains and Large Diameter Water Mains
0799	General Water Facilities
0800 - 0849	Public Water Outlets and Remote Pressure Monitoring Locations
0800	General Public Water Outlets and Pressure Monitoring
0801	Public Water Outlet – 1539 Waverley Street
0802	Public Water Outlet– Portage Avenue at Perimeter Highway (McCarthy St. and Oxbow Bend Road)
0803-0811	Spares
0812	Pressure Monitoring Location - Gateway - Gateway Road and Springfield Road
0813	Spare
0814	Pressure Monitoring Location - Brookside - Brookside Boulevard and Inkster Boulevard
0815	Spare
0816	Pressure Monitoring Location - John Black - John Black Avenue and Main Street
0817	Spare
0818	Pressure Monitoring Location - Smugglers Cove - Lagimodiere Boulevard and Smugglers Cove
0819	Spare
0820	Pressure Monitoring Location - Charing Cross - Paddington Road and Charing Cross Crescent
0821	Spare
0822	Pressure Monitoring Location - University - Pembina Highway and Chancellor Matheson Road
0823	Spare
0824	Pressure Monitoring Location - Devonshire - Plessis Road and Devonshire Drive



Facility Code	Facility
0825	Spare
0826	Pressure Monitoring Location – Redonda - Redonda Street and Kildare Avenue
0827	Spare
0828	Pressure Monitoring Location - Rouge Road - Rouge Road and Assiniboine Ave
0829	Spare
0830	Pressure Monitoring Location - St. Norbert - Rue Des Trappistes and Villeneuve Boulevard
0831	Spare
0832	Pressure Monitoring Location - Sargent - Sargent Avenue and St. James Street
0833-0849	Spares
0850 - 0899	Solid Waste Facilities, Excluding Brady Road Landfill
0850	General Solid Waste Facilities
0851	Pacific Avenue 4R Depot
0852	Panet Road 4R Depot
0853	Closed Landfills
N/A	Brady Road Landfill (See FC 400)
0854-0899	Spares
0900 - 0999	Unused - Spares



Appendix B Facility Area Codes

Area Code	Description
А	General or area code is not applicable
С	Chlorine Area
D	Dechlorination Building
E	Engine Shed
Н	Electrical Shed
G	Gatehouse
Р	Pumphouse (including Electrical & Control Room)
R	Residences
S	Staff House
U	SCADA

Area Codes – Shoal Lake Aqueduct Intake Facility

Area Codes – Shoal Lake Aqueduct

Area Code	Description
А	General or area code is not applicable (SCADA)
В	Backbone Repeater
С	Boathouse
D	Remote Terminal Units
М	Manholes
Ν	Underdrains
0	Overflow
Р	Shoal Lake Aqueduct (Pipe)
Q	Branch 1 Aqueduct (Pipe)
R	G.W.W.D. Railway
S	Drainage Siphon
Т	Communication Tower
U	Road Crossing
V	Venturi
W	Valve Chamber

Area Codes – Winnipeg Drinking Water Treatment Plant

Area Code	Description
А	Administration
В	Main Treatment Plant Building
С	Chemical Feed Systems (Polymer, SBS, Hydrogen Peroxide)
D	Deacon Booster Pumping Station (includes Ultraviolet Light Disinfection)
E	Electrical Substation
F	Filtration
G	Standby Power Generation
Н	Plant Utilities
1	Inlet Works and Raw Water Pumping
J	Hypochlorite Generation and Feed Building
К	Enclosed Bridge
L	Dewatering Cells (Freeze Thaw Pond) / Force Main
М	General Plant Services / Miscellaneous (incl. Fire Pump Room and Electrical Room)
N	Aqueduct Bridges
0	Ozone
Р	Flocculation and DAF
R	Residuals Handling
S	Bulk Chemical Storage and Feed Building
Т	Treated Water Storage (Clearwell)
U	Instrumentation and Control (SCADA)
V	Civil Maintenance and Aqueduct Storage Building
W	Future
Х	Pilot Plant
Y	Yard Piping and Valve Chamber
Z	Deacon Chemical Feed Facility

Note: The current application of area codes does not meet the intent of this standard in that it is not based upon a physical location. For example, the H area code is for all plant utilities across the entire building.

Area Codes – Regional Water Pumping Stations

Area Code	Description			
А	General or area code is not applicable			
В	Collections Building (McPhillips only)			
С	Chlorine Building / Area			
М	Main Pumping Station Building			
Р	SCADA, PLC, RTU			
R	Reservoir and Ancillary Buildings			
S	Control Centre Building (McPhillips Only)			
Υ	Yard Piping and Valve Chambers/ Drain Building			

Area Codes – Feeder Mains and Large Diameter Water Mains

Area Code	Description
А	General or area code is not applicable
В	Valve Chambers
С	Railroad Crossings
D	Road Crossings
Е	River Crossings
F	Feeder Mains
W	Large Diameter Water Mains

Area Codes - St. Boniface Yards (552 and 598 Plinguet St)

Area Code	Description			
А	General or area code is not applicable			
С	Civil Maintenance Buildings			
G	G.W.W.D. Railway Station (Building 1)			
М	Meter Shop (Building 15)			
N	552 Plinguet - North Building (Building 3)			
0	Storage Buildings			
Р	598 Plinguet - Railway Shop (Building 2)			
R	Rail Car Storage (Buildings 19 & 20)			
S	552 Plinguet - South Building – Shop (Building 4)			
Т	Track #9 Depot			
W	St. Boniface Water Tower (Building 14)			
Υ	Yard Piping and Valve Chambers			



Area Codes – Land Drainage

Area Code	Description			
А	General or area code is not applicable			
В	Storm Retention Basin (SRB)			
F	Flood Pumping Manhole			
G	Gate Chambers			
L	Land Drainage Pumping Station			
0	Outfalls			
U	Underpass Pumping Station			
W	Deep Well Pump			

Area Codes – NEWPCC

Area Code	Description		
А	General or area code is not applicable		
В	Boilers		
С	Centrate Treatment		
D	Digesters		
Е	Electrical Building and Substation		
F	Phosphorous Removal Facility		
G	Pre-Aeration and Grit Removal		
н	HOLD – Potentially reserve for Headworks area code. Decision to be made under the sewage treatment upgrade program.		
М	Main Building		
Р	Primary Clarifiers		
R	Oxygen Reactors		
S	Secondary Clarifiers		
U	UV Disinfection Facility		
W	Sludge Dewatering		
Х	Leachate Receiving Facility		
Υ	Hauled Wastewater Receiving Facility		

Notes:

1. The NEWPCC area codes will be updated as part of the NEWPCC Upgrade project.



Area Codes – SEWPCC

Area Code	Description			
А	General or area code is not applicable			
В	Service Building (includes Boilers, Storage Building and Standby Building)			
С	Chemical / Electrical Building			
D	Fermenters / Sludge Thickeners			
G	Headworks (Pump and Screen building, Grit Building)			
Н	Sludge Gas – Thermal Oxidizer			
К	High-Rate Clarification Building			
М	Administration Building			
Р	Primary Clarifiers			
R	Bioreactors / Blower Building			
S	Secondary Clarifiers			
Т	Biofilter / Odour Control			
U	UV Disinfection Building, Outfall			
Υ	Yard / Electrical Substation			

Area Codes – WEWPCC

Area Code	Description			
А	General or area code is not applicable			
F	Primary Sludge Fermenters			
G	DISCONTINUED - Formerly Headworks			
Н	Headworks			
L	General and Site Works			
М	Perimeter Road Pumping Station			
Р	Primary Clarifiers			
S	Secondary Clarifiers and Bioreactors			
Т	DAF (Dissolved Air Flotation) Thickeners			
U	Utility Building HOLD – Possible re-allocation for future UV Disinfection			
V	HOLD – Possible re-allocation as the Utility Building. (See Note 1)			
Y	HOLD – Possible use for Yard. Decision to be made under the sewage treatment upgrade program.			
Z	Ponds, Effluent and Outfall			

Notes:

1. Some equipment in the WEWPCC Utility Building has already been re-identified as V.

Area Codes – Wastewater Collections

Area Code	Description		
А	General or area code is not applicable		
F	Flood Pumping Stations		
L	Wastewater Lift Stations		
S	Sewer		

Area Codes – Solid Waste BRRMF

Area Code	Description		
А	General or area code is not applicable		
В	Biosolids and LYW Composting		
С	Administration Building		
R	Brady 4R Winnipeg Depot		

Area Codes – Solid Waste

Area Code	Description
А	General or area code is not applicable
С	Closed Landfills
R	4R Depot



26 of 38

Appendix C Master Equipment Functional Designations

Functional Designation	Description	Туре	Notes
ACP	Access Control Panel	Security	
ACU	Air Conditioning Unit	Mechanical	
AD	Air Dryer	Mechanical	
ADP	Automation Device Panel	Automation	
AF	Aeration Fan	Mechanical	
AG	Agitator	Mechanical	
AHU	Air Handling Unit	Mechanical	Includes Make-Up Air Units
ANT	Antenna	Communication	
ATS	Automatic Transfer Switch	Electrical	
В	Blower	Mechanical	
BAT	Battery	Electrical	
BC	Battery Charger	Electrical	
BD	Balance Damper	Mechanical	
BDD	Backdraft Damper	Mechanical	
BFP	Back Flow Preventer	Mechanical	
BLR	Boiler	Mechanical	
BS	Bar Screen	Mechanical	Use SCR
BV	Balancing Valve	Mechanical	Manual mechanical balancing valve (not typically adjusted by operations).
BVA	Balancing Valve Automatic	Mechanical	Automatic mechanical balancing valve.
BUS	Busway	Electrical	
С	Cable (Power)	Electrical	
CA	Cable (Automation)	Automation	
CAL	Calibration Column	Mechanical	
CAP	Capacitor	Electrical	Typically individual unit. See PFC.
СВ	Circuit Breaker	Electrical	Includes air, vacuum, SF6, and moulded case circuit breakers
CBUS	Cable Bus	Electrical	
CC	Cooling Coil	Mechanical	
CDR	Condenser	Mechanical	
CE	Centrifuge	Mechanical	
CHLR	Chiller	Mechanical	



Functional Designation	Description	Туре	Notes
СМ	Clarifier Mechanism	Mechanical	
CMP	Compressor	Mechanical	
CN	Network Cable	Communication	
CNP	Network Cable - Patch	Communication	
CNV	Conveyor	Mechanical	Includes skimmers
CON	Contactor	Electrical	
СР	Control Panel	Electrical	
СР	Control Panel	Automation	
CPR	Cathodic Protection Rectifier	Electrical	
CRN	Crane	Mechanical	
CS	Computer Server	Automation	
CSTE	Customer Service Termination Equipment	Electrical	
СТ	Cooling Tower	Mechanical	
CU	Condensing Unit	Mechanical	
CV	Check Valve	Mechanical	
CW	Computer Workstation - General	Automation	
CWD	Computer Workstation - Development	Automation	
CWO	Computer Workstation - Operator	Automation	
CYC	Cyclone	Mechanical	
DCS	Distributed Control System	Automation	
DP	Distribution Panel	Electrical	
DS	Disconnect Switch (non- fusible)	Electrical	
EDP	Electrical Device Panel	Electrical	Use for metering panels, protection panels and other Miscellaneous electrical panels.
EDU	Eductor	Mechanical	
EF	Exhaust Fan	Mechanical	
ELB	Emergency Lighting Battery Pack	Electrical	May have integrated lights.
F	Fan - General	Mechanical	
FA	Flame Arrestor	Mechanical	
FAAP	Fire Alarm Annunciator Panel	Electrical	
FACP	Fire Alarm Control Panel	Electrical	
FAS	Fire Alarm System	Electrical	
FC	Fan Coil	Mechanical	



Functional Designation	Description	Туре	Notes
FD	Fire Damper	Mechanical	Utilize same equipment number as air handler.
FDP	Field Device Panel	Automation	
FDR	Feeder	Mechanical	Examples: screw feeder, chlorinator, glycol make-up unit
FDS	Fusible Disconnect Switch	Electrical	
FEX	Fire Extinguisher	Mechanical	
FG	Flap Gate	Mechanical	
FIL	Filter	Mechanical	
FU	Fuse	Electrical	
GDC	Gas Detection Controller	Automation	
GEN	Generator	Electrical	
GR	Grille / Louvre – General	Mechanical	
GRD	Grille – Diffuser	Mechanical	
HC	Heating Coil	Mechanical	
HCC	Heater Coil Controller	Electrical	Includes SCR and contactor based controllers.
HCE	Heating Coil, Electric	Mechanical	Duct based
HE	Heat Exchanger	Mechanical	
HF	Harmonic Filter	Electrical	
HMI	Standalone Human Machine Interface (HMI) Terminal	Automation	
НО	Hoist	Mechanical	
HOP	Hopper	Mechanical	
HP	Heat Pump	Mechanical	
HRC	Heat Recovery Coil	Mechanical	
HTR	Heater	Mechanical	General heaters, radiant, convectors, etc.
HUM	Humidifier	Mechanical	
HV	Hand/Manual Valve	Mechanical	See Section 5.2
INJ	Injector	Mechanical	
INV	Inverter	Electrical	
ISB	Intrinsic Safety Barrier	Automation	Typically only a subcomponent.
JB	Junction Box	Electrical	
JBA	Junction Box (Automation)	Automation	
JBN	Junction Box - Network	Communication	
К	Interlocking Key (Kirk Key)	Electrical	
LC	Lighting Contactor	Electrical	A lighting control panelboard would be identified as a PNL.



Functional Designation	Description	Туре	Notes
LCP	Local Control Panel	Automation	
LDB	Load Bank	Electrical	
MCC	Motor Control Centre	Electrical	
MCP	Motor Circuit Protector	Electrical	
MCS	Moulded Case Switch	Electrical	
MDM	Modem	Communication	
MMS	Manual Motor Starter	Electrical	
MS	Motor Starter	Electrical	
MSP	Motor Starter Panel	Electrical	
MTR	Motor	Electrical	
MTS	Manual Transfer Switch	Electrical	
MXR	Mixer	Mechanical	
NAP	Network Access Point (Wireless)	Communication	
ND	Network Device	Communication	Utilize for general devices not otherwise in list. Example: network terminators
NFW	Network Firewall	Communication	
NGR	Neutral Grounding Resistor	Electrical	
NGW	Network Gateway	Communication	
NJ	Network Jack	Communication	
NJT	Network Jack - Telephone	Communication	
NMC	Network Media Converter	Communication	
NP	Networking Panel	Communication	
NRA	Network Radio	Communication	
NRP	Network Repeater	Communication	
NRT	Network Router	Communication	
NSP	Network Segment Protector	Communication	Typically used for PROFIBUS PA
NSW	Network Switch, Ethernet	Communication	
NT	Network Terminator	Communication	
OD	Overhead Door	Mechanical	
P	Pump	Mechanical	
PB	Pull Box	Electrical	
PCV	Pressure Control Valve (Pressure Regulator)	Mechanical	
PFC	Power Factor Correction Unit	Electrical	Bank of capacitors. May contain reactors.



Functional Designation	Description	Туре	Notes
PLC	Programmable Logic Controller	Automation	
PM	Power Meter	Electrical	
PNL	Panelboard	Electrical	
PRN	Printer	Automation	
PS	Power Supply	Electrical	24VDC power supply
PSP	Power Supply Panel	Electrical	Panel containing 24VDC power supplies, fire alarm booster power supply
PSV	Pressure Safety/Relief Valve	Mechanical	
R	Reactor (various processes)	Mechanical	
RCFR	Rectifier	Electrical	
RCPT	Receptacle	Electrical	
RCTR	Reactor	Electrical	
RDT	Rotary Drum Thickener	Mechanical	
RES	Reservoir	Mechanical	Large water containment structure.
RIO	Remote I/O	Automation	
RLY	Protection Relay	Electrical	
RTU	Remote Terminal Unit	Automation	
S	Skid Package	Mechanical	
SA	Sampler	Mechanical	
SCBR	Scrubber	Mechanical	
SCP	Security Control Panel	Security	
SCR	Screen	Mechanical	Utilized for screening systems such as bar screens and perforated plate screens.
SD	Smoke Damper	Mechanical	Utilize same equipment number as air handler.
SF	Supply Fan	Mechanical	
SGR	Switchgear	Electrical	
SL	Stop Logs	Mechanical	
SLG	Sluice Gate	Mechanical	May only be utilized within existing facilities where the use of the SLG identifier is well established. The designation may not to be utilized for new or upgraded WSTP facilities. Identify as a valve (HV, XV, FV, etc.).
SPL	Splitter	Electrical	
SS	Soft Starter	Electrical	



Functional Designation	Description	Туре	Notes
STR	Strainer	Mechanical	See Section 5.2
SVM	Security Video Monitor	Security	
SVR	Security Video Recorder	Security	
SW	Switch	Electrical	
ТВ	Terminal Block	Automation	Subcomponent Only
ТВС	Travelling Bridge Collector	Mechanical	
тк	Tank	Mechanical	
TU	Terminal Unit	Mechanical	Includes CAV/VAV/Dual Duct boxes. Dampers to be identified as per Section 7.1 – Instrumentation.
TVSS	Transient Voltage Surge Suppressor	Electrical	
U	Miscellaneous Equipment Not in List	Mechanical / Electrical / Automation	Example: Water Softener
UH	Unit Heater	Mechanical	
UPS	Uninterruptible Power Supply	Electrical	
UVR	Ultra-Violet (UV) Reactor	Mechanical	
V	Vessel, Pressure Vessel	Mechanical	e.g. air receiver, glycol expansion tank
VFD	Variable Frequency Drive	Electrical	
W	Weir	Mechanical	
WCP	Washer / Compactor	Mechanical	
WGB	Waste Gas Burner	Mechanical	
XFMR	Transformer	Electrical	



Appendix D Equipment Number Ranges

Equipment Number Ranges – Shoal Lake Intake Facility

Area Code	Range	Description
All Areas	001 - 049	Major Pumping
	050 - 099	Future
	100 – 499	Process Equipment
	500 – 599	Misc. Building Equipment – Air Compressors, Sump Pumps, Fuel Systems, etc.
	600 - 699	HVAC Equipment
	700 - 799	Electrical Equipment
	800 – 899	Automation Equipment
	900 - 999	Misc., including communication and security

Equipment Number Ranges – Shoal Lake Aqueduct

Area Code	Range	Description
All Areas	TBD	Needs to be developed.



Equipment Number Ranges – Winnipeg Drinking Water Treatment Plant

Area Code	Range	Description
C – Chemical Feed	001 - 099	Process – Polymer
	100 – 899	Process – Future
	700-799	Electrical Equipment
	800 – 999	Chemical Systems
	900 - 949	Chemical Systems – Hydrogen Peroxide
	950 – 979	Chemical Systems – Sodium Bisulphite
D - Deacon Booster Pumping	001 - 049	Major Pumping
Station	050 - 099	Future
	100 - 499	Process Equipment
	500 – 599	Misc. Building Equipment – Air Compressors, Sump Pumps, etc.
	600 - 699	HVAC
	700-799	Electrical Equipment
	800-899	Automation Equipment
	900 – 999	Misc., including communication and security
F - Filtration	001 – 999	Process
H – Plant Utilities	001 - 099	HVAC
	100 - 199	Fire Pumps
	200 - 299	Auxiliary Building HVAC
	300 - 399	Building Safety and Security
	400 - 499	Process Pumps
	500 - 599	Sanitary Sumps
	600 - 699	Electrical Distribution
	700 - 799	Potable Water
	800 - 899	Unallocated
	900 - 950	Emergency Generator
	951 - 999	Electrical Substation
I – Inlet and Raw Water	001 - 999	Process
J – On-Site Hypochlorite Generation	001 - 999	Process
L – Freeze Thaw Pond	001 - 999	Process
O - Ozone	001 - 999	Process
P – Flocculation and DAF	001 - 999	Process
R – Residuals Handling	001 - 999	Process
S – Bulk Chemical Storage	001 - 999	Process
T – Treated Water Storage and Handling (Clearwell)	001 - 999	Process
U – Ultraviolet Light Disinfection	001 - 999	Process

Area Code	Range	Description
X – Pilot Plant	001 - 999	Process
Y – Yard Piping and Valve	001 - 099	Surge Towers
Chambers	100 - 199	Yard Piping
	200 - 299	Yard Lighting
Z – Deacon Chemical Feed Facility	001 – 099	Process Equipment
	100 - 199	Chemical Systems – Hydrofluosilicic Acid
	200 - 299	Chemical Systems – Phosphoric Acid
	300 - 499	Process Equipment
	500 - 599	Misc. Building Equipment – Air Compressors, Sump Pumps, etc.
	600 - 699	HVAC
	700 - 799	Electrical Equipment
	800 - 899	Automation Equipment
	900 - 999	Misc., including communication and security

Note: The above WTP process ranges are largely based upon existing designations. In the event of future significant upgrades, some realignment may be required to fully align with this standard.

Area Code	Range	Description
All Area Codes	001 - 049	Major Pumping
	050 - 099	Future
	100 – 499	Process Equipment
	500 – 599	Misc. Building Equipment – Air Compressors, Sump Pumps, etc.
	600 - 699	HVAC Equipment
	700 - 799	Electrical Equipment
	800 - 899	Automation Equipment
	900 - 999	Misc., including communication and security



Area Code	Range	Description
L – Wastewater Lift Stations or	01 – 49	Reserved for Process Equipment
F – Flood Pumping Station or	01 - 09	Pumps
U – Underpass Pumping Station	10 – 19	Wet Well / Intake Equipment
	20 - 39	Misc. Process
	40 - 49	Discharge / Forcemain
	50 - 59	Misc. Building Equipment – Air Compressors, Backflow Preventer, etc.
	60 - 69	HVAC Equipment
	70 - 79	Electrical Equipment
	80 – 89	Automation Equipment
	90 - 99	Misc., including communication and security
S – Sewer	01 – 79	Sewer – Misc
	80 - 89	Sewer – Before Outfall
	90 - 99	Sewer - Outfall

Note: The Collections facilities utilize two digit equipment numbers due to the limited amount of equipment located within each facility. Instrumentation loop numbers within Collections facilities have three digits.

Equipment Number Ranges – SE	WPCC and WEWPCC Wastewater Treatment Facilities
------------------------------	---

Area Code	Range	Process Code	Description
All Area Codes	001 - 099	0	Area Specific Processes
	100 – 199	1	Area Specific Processes
	200 – 299	2	Area Specific Processes
	300 - 399	3	Area Specific Processes
	400 – 499	4	Area Specific Processes
	500 – 599	5	Misc. Building Equipment – Air Compressors, Backflow Preventer, etc. (May be allocated for process as required)
	600 - 699	6	HVAC Equipment
	700 - 799	7	Electrical Equipment
	800 - 899	8	Automation Equipment
	900 – 999	9	Misc., including communication and security

Note: Refer to the IMS for further definition of Equipment Number ranges and Process Codes within the Wastewater Treatment Facilities.

Area Code	Range	Process Code	Description
All Area Codes	0001 - 0999	0	Area Specific Processes
	1000 – 1999	1	Area Specific Processes
	2000 – 2999	2	Area Specific Processes
	3000 - 3999	3	Area Specific Processes
	4000 - 4999	4	Area Specific Processes
	5000 – 5999	5	Misc. Building Equipment – Air Compressors, Backflow Preventer, etc. (May be allocated for process as required)
	6000 - 6999	6	HVAC Equipment
	7000 – 7999	7	Electrical Equipment
	8000 - 8999	8	Automation Equipment
	9000 – 9999	9	Misc, including communication and security

Equipment Number Ranges – NEWPCC Wastewater Treatment Facility

Note: Refer to the IMS for further definition of Equipment Number ranges and Process Codes within the Wastewater Treatment Facilities.



Appendix E Sample Drawings

The following process and instrumentation diagram drawings were created as sample drawings.

South End Water Pollution Control Centre

City Drawing Number	Sheet	Rev	Project / Area	TITLE
1-0102A-SK01	001	00		PROCESS & INSTRUMENTATION DIAGRAM, LEGEND AND DETAILS
1-0102A-SK01	002	00		PROCESS & INSTRUMENTATION DIAGRAM, LEGEND AND DETAILS
1-0102A-SK01	003	00		PROCESS & INSTRUMENTATION DIAGRAM, LEGEND AND DETAILS
1-0102S-SK02	001	00	SECONDARY CLARIFIERS	PROCESS & INSTRUMENTATION DIAGRAM, CLARIFIER 1, PROPOSED IDENTIFICATION
1-0102S-SK03	001	00	SECONDARY CLARIFIERS	PROCESS & INSTRUMENTATION DIAGRAM, CLARIFIER 2, PROPOSED IDENTIFICATION
1-0102S-SK04	001	00	SECONDARY CLARIFIERS	PROCESS & INSTRUMENTATION DIAGRAM, CLARIFIER 3, PROPOSED IDENTIFICATION
1-0102S-SK05	001	00	SECONDARY CLARIFIERS	PROCESS & INSTRUMENTATION DIAGRAM, SECONDARY CLARIFIER EFFLUENT & SAMPLE SYSTEM, PROPOSED IDENTIFICATION
1-0102S-SK06	001	00	SECONDARY CLARIFIERS	PROCESS & INSTRUMENTATION DIAGRAM, RETRUN ACTIVATED SLUDGE PUMP P-S101, PROPOSED IDENTIFICATION
1-0102S-SK07	001	00	SECONDARY CLARIFIERS	PROCESS & INSTRUMENTATION DIAGRAM, REPURN ACTIVATED SLUDGE PUMPS P-S102 & P-S103, PROPOSED IDENTIFICATION
1-0102S-SK08	001	00	SECONDARY CLARIFIERS	PROCESS & INSTRUMENTATION DIAGRAM, REPURN ACTIVATED SLUDGE PUMPS P-S108 & P-S109, PROPOSED IDENTIFICATION
1-0102S-SK09	001	00	SECONDARY CLARIFIERS	PROCESS & INSTRUMENTATION DIAGRAM, RAS HEADER, PROPOSED IDENTIFICATION
1-0102S-SK10	001	00	SECONDARY CLARIFIERS	PROCESS & INSTRUMENTATION DIAGRAM, WASTE ACTIVATED SLUDGE PUMPS P-S202 & P-S203, PROPOSED IDENTIFICATION

Marion Wastewater Pumping Station

City Drawing Number	Sheet	Rev	Project / Area	TITLE
1-0159L-SK01	001	00		PROCESS & INSTRUMENTATION DIAGRAM, WASTEWATER PUMPING
1-0159L-SK02	001	00		PROCESS & INSTRUMENTATION DIAGRAM, VENTILATION

MacLean Water Pumping Station

City Drawing Number	Sheet	Rev	Project / Area	TITLE
1-0630A-SK01	001	00		PROCESS & INSTRUMENTATION DIAGRAM, LEGEND & DETAILS
1-0630A-SK01	002	00		PROCESS & INSTRUMENTATION DIAGRAM, LEGEND & DETAILS
1-0630A-SK01	003	00		PROCESS & INSTRUMENTATION DIAGRAM, LEGEND & DETAILS



City Drawing Number	Sheet	Rev	Project / Area	TITLE
1-0630C-SK01	001	00		PROCESS & INSTRUMENTATION DIAGRAM, CHLORINE CYLINDER SHUTOFF VALVES
1-0630C-SK02	001	00		PROCESS & INSTRUMENTATION DIAGRAM, CHLORINATION SYSTEM
1-0630M-SK02	001	00		PROCESS & INSTRUMENTATION DIAGRAM, SUCTION HEADER
1-0630M-SK03	001	00		PROCESS & INSTRUMENTATION DIAGRAM, PUMP P-M021
1-0630M-SK04	001	00		PROCESS & INSTRUMENTATION DIAGRAM, PUMP P-M022
1-0630M-SK05	001	00		PROCESS & INSTRUMENTATION DIAGRAM, PUMP P-M023
1-0630M-SK07	001	00		PROCESS & INSTRUMENTATION DIAGRAM, PUMP P-M025
1-0630M-SK08	001	00		PROCESS & INSTRUMENTATION DIAGRAM, PUMP P-M026
1-0630M-SK09	001	00		PROCESS & INSTRUMENTATION DIAGRAM, DISCHARGE HEADER
1-0630M-SK10	001	00		PROCESS & INSTRUMENTATION DIAGRAM, COMPRESSED AIR SYSTEM
1-0630M-SK11	001	00		PROCESS & INSTRUMENTATION DIAGRAM, GEN-M751 & GEN- M752
1-0630M-SK12	001	00		PROCESS & INSTRUMENTATION DIAGRAM, MISC.ELLANEOUS
1-0630R-SK01	001	00		PROCESS & INSTRUMENTATION DIAGRAM, RESERVOIR FILL VALVES
1-0630R-SK02	001	00		PROCESS & INSTRUMENTATION DIAGRAM, RESERVOIR CELLS
1-0630Y-SK01	001	00		PROCESS & INSTRUMENTATION DIAGRAM, DISCHARGE TO FEEDERMAINS